

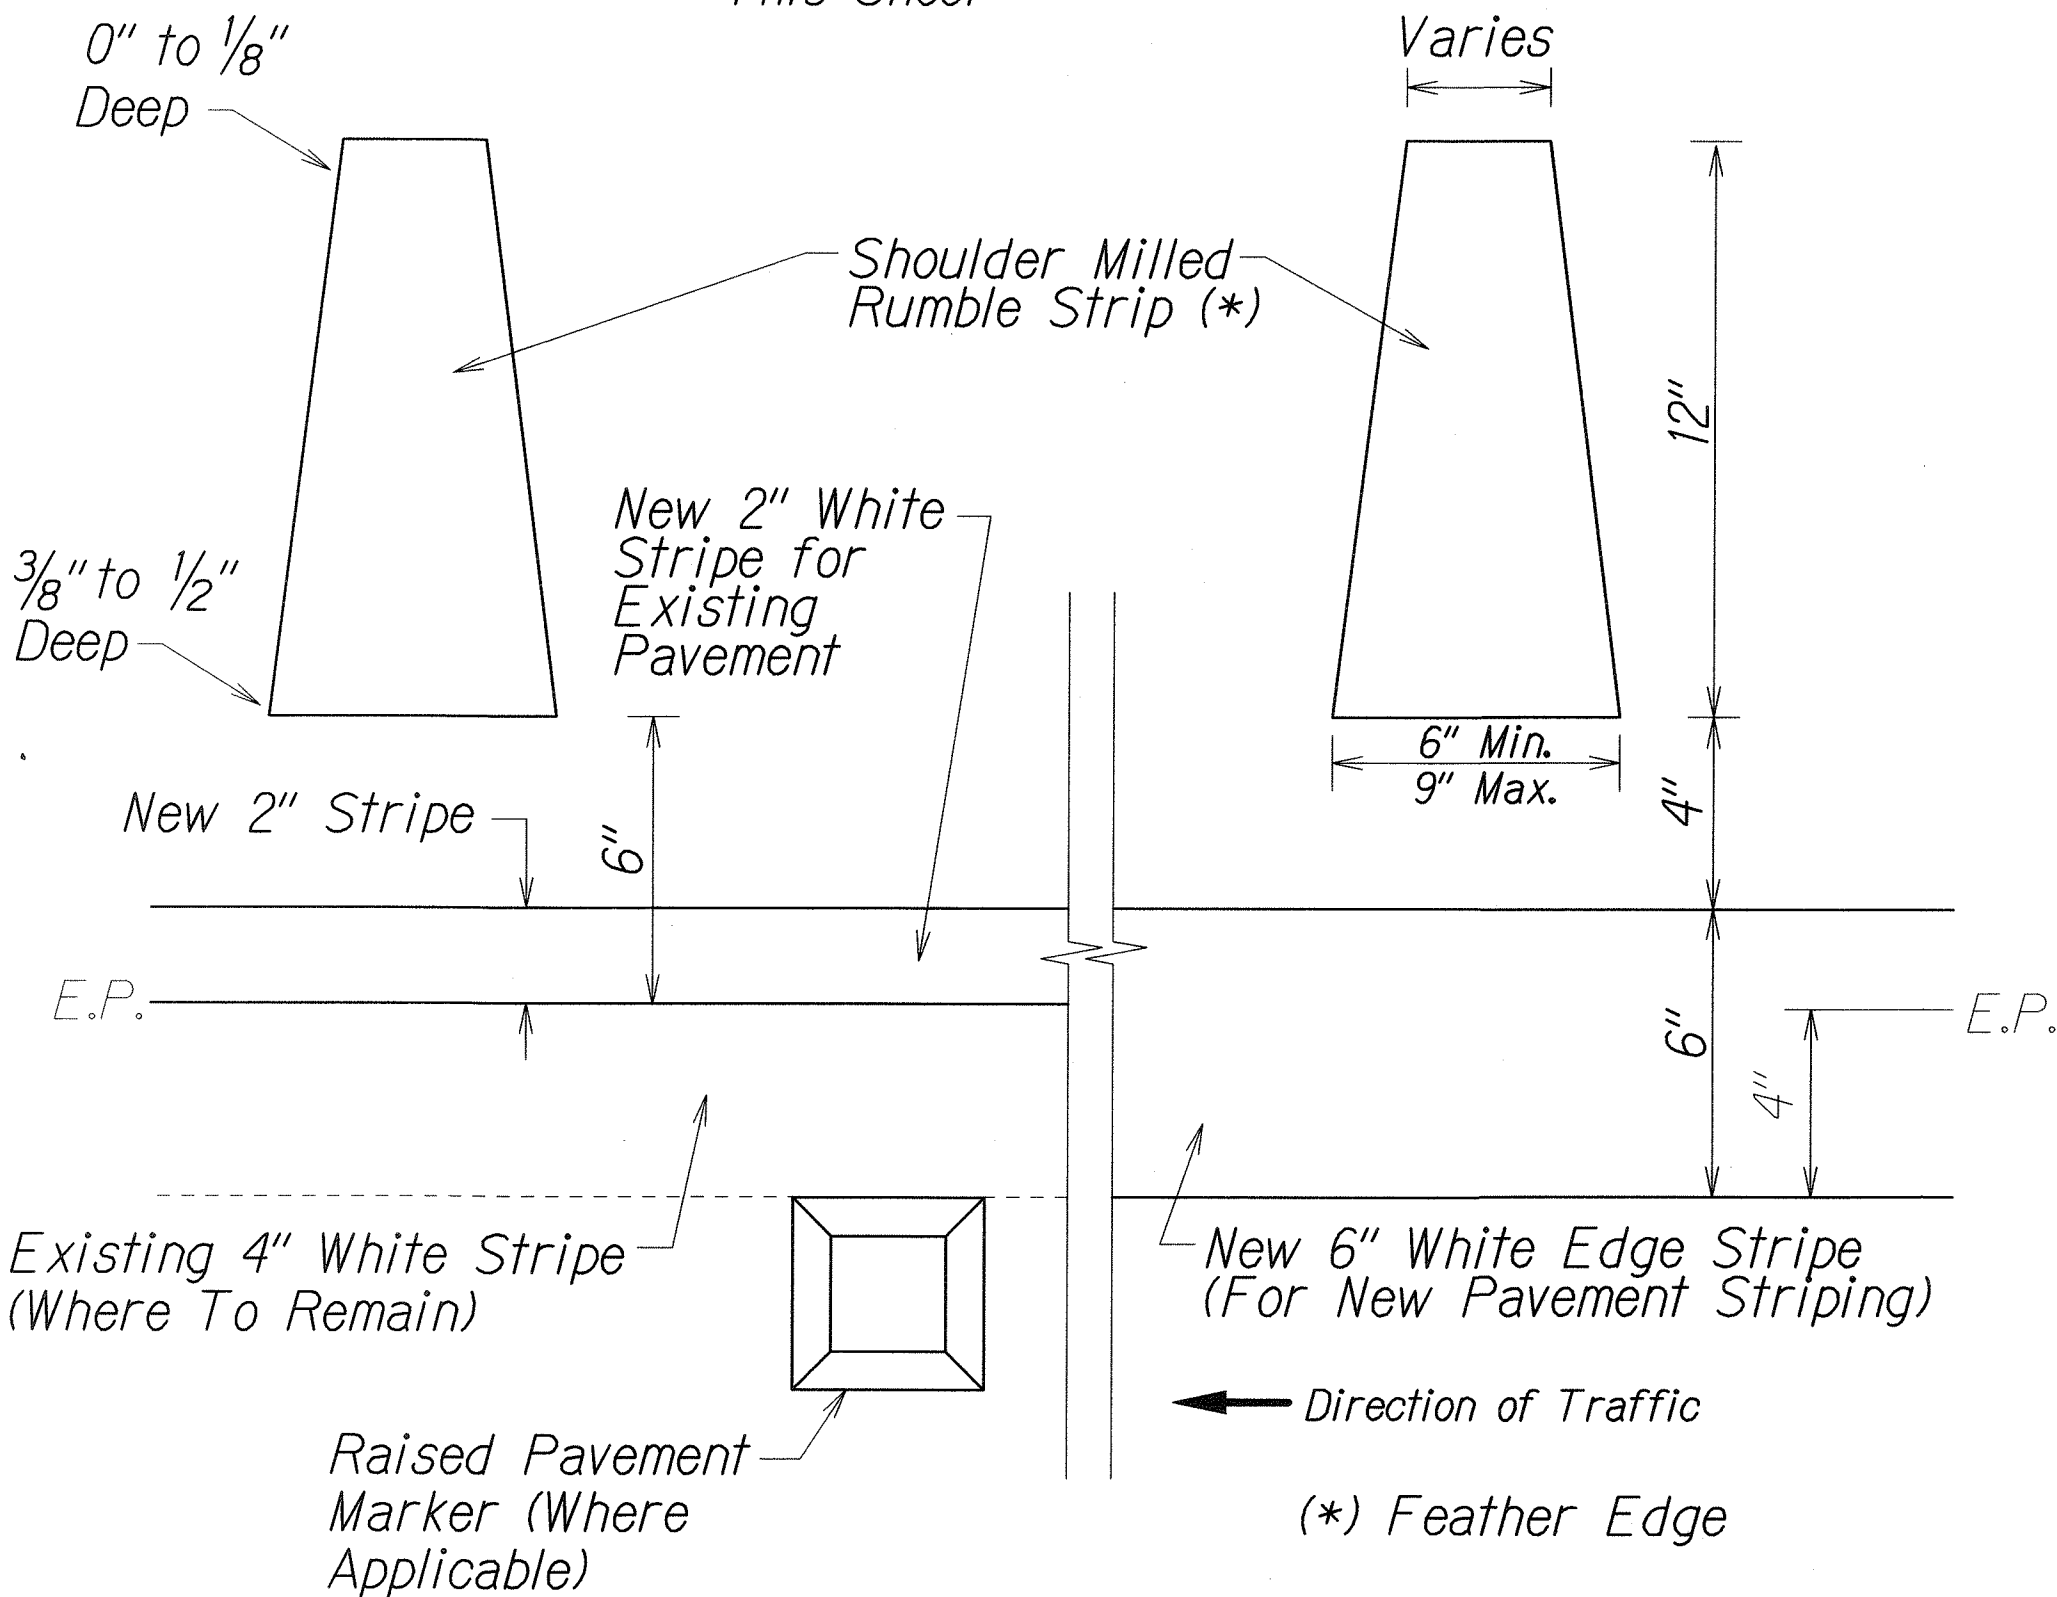



FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-011-2(39)	2011	ADD. 22	33

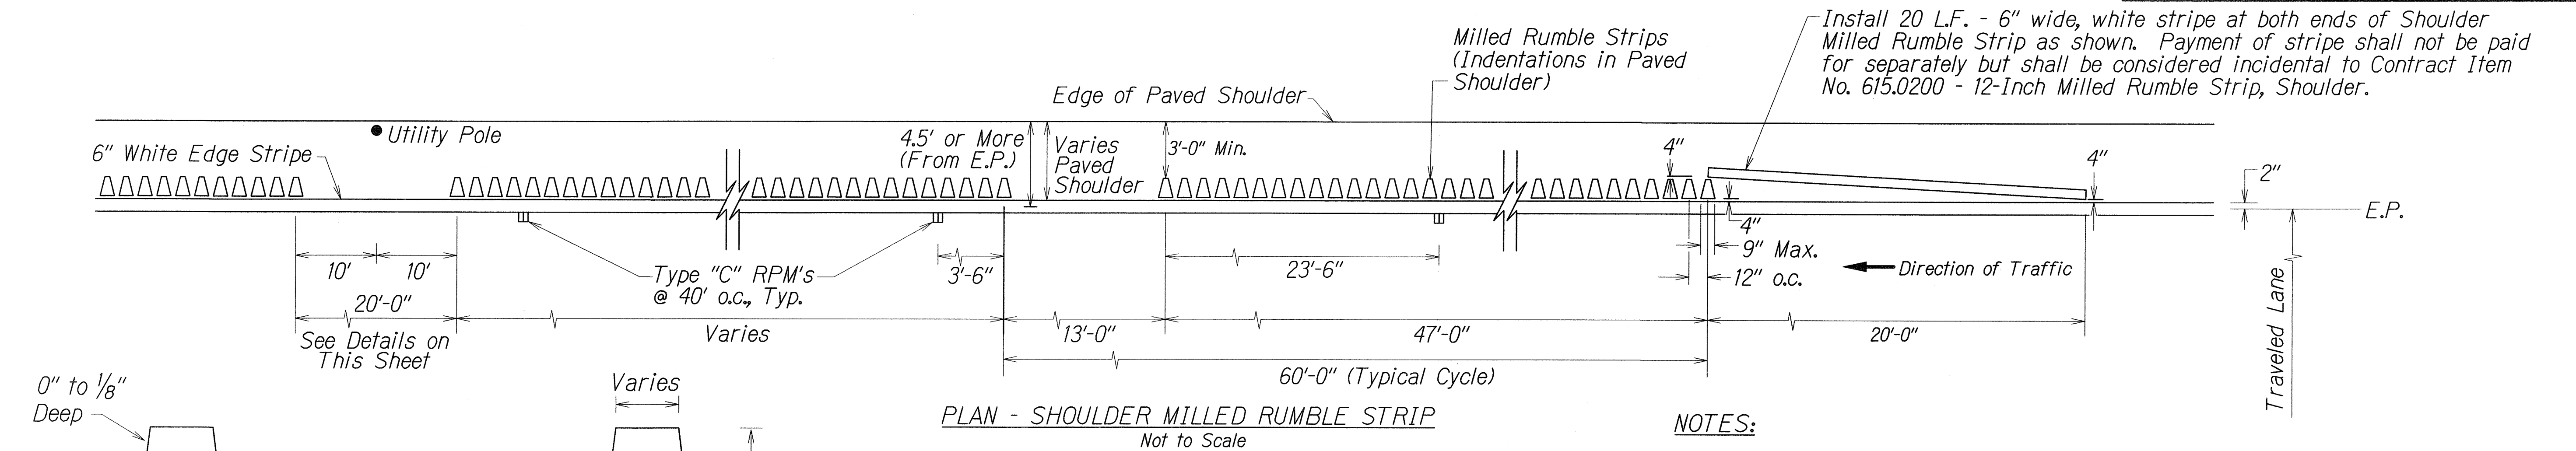


PLAN - SHOULDER MILLED RUMBLE STRIP
Not to Scale

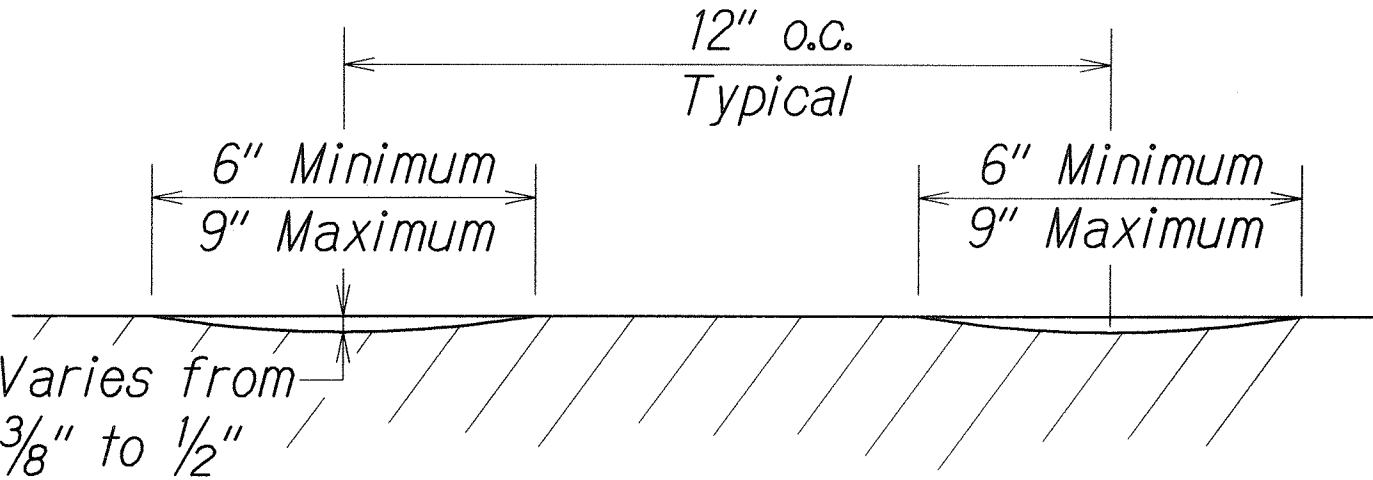


CROSS SECTION - SHOULDER MILLED RUMBLE STRIP
Not to Scale

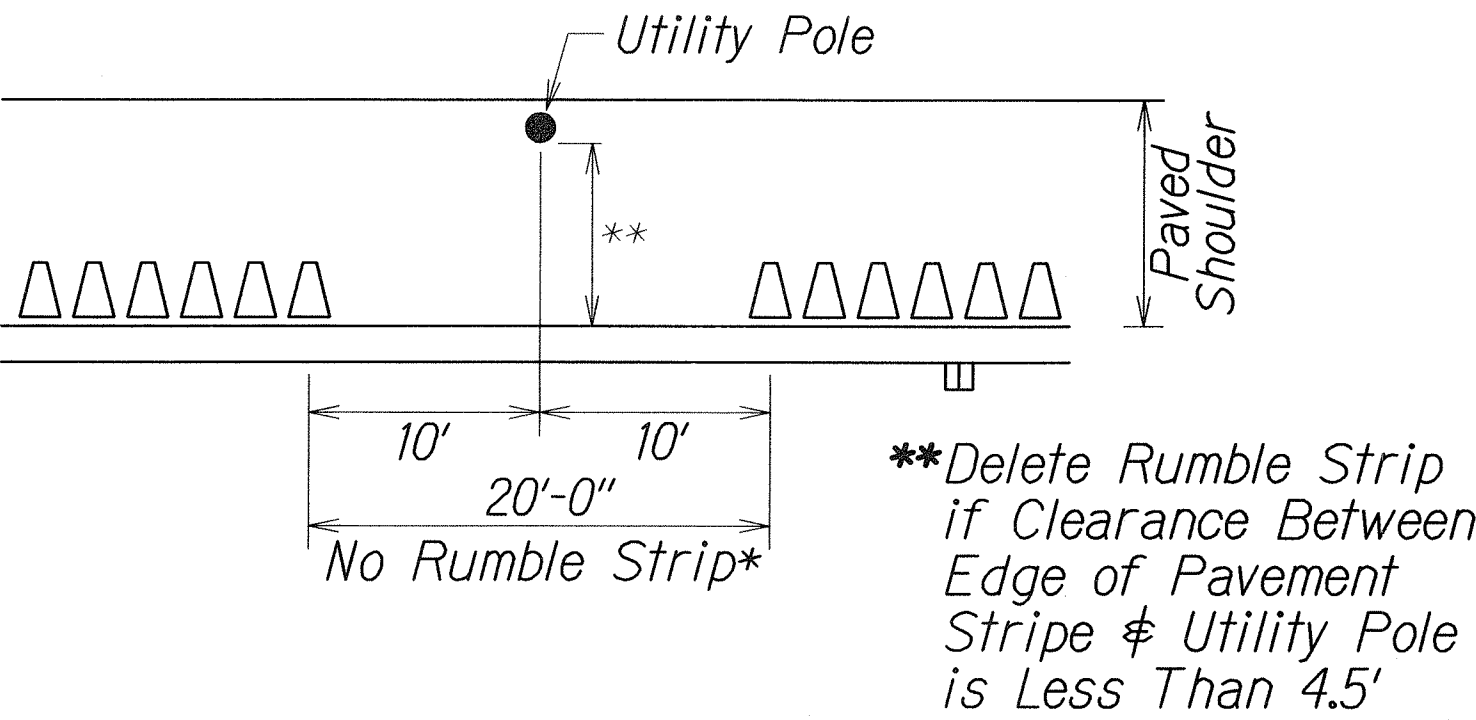

DETAIL - CONDITION WHERE UTILITY POLE EXISTS
Not to Scale

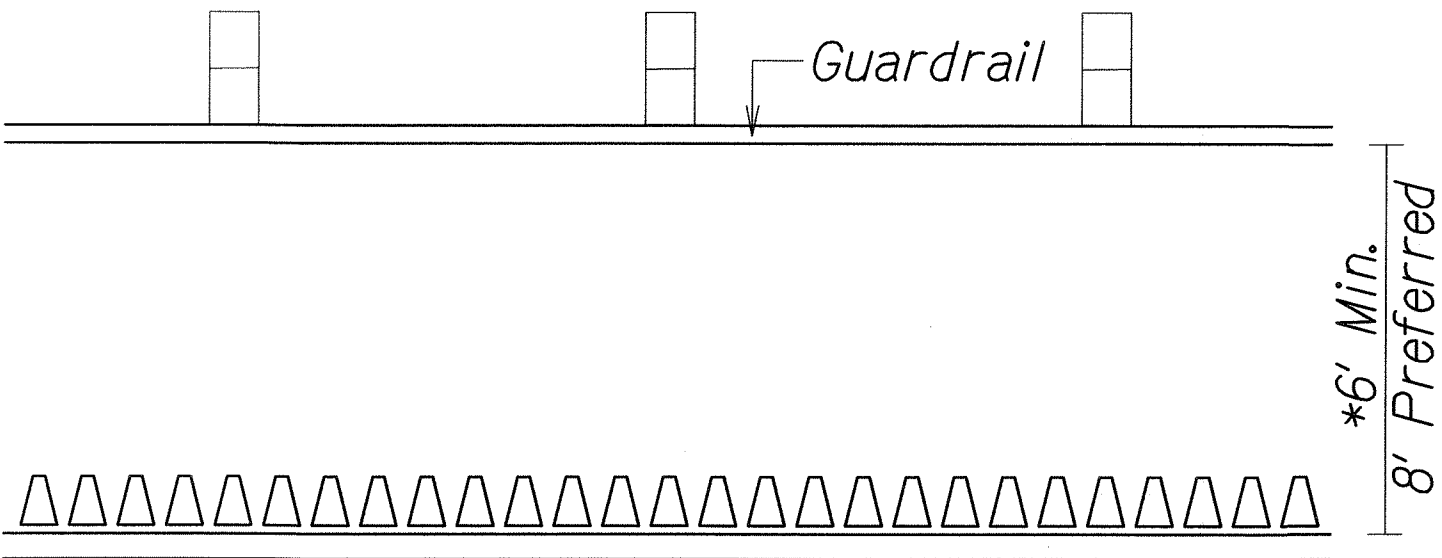

DETAIL - CONDITION WHERE GUARDRAIL EXISTS
Not to Scale

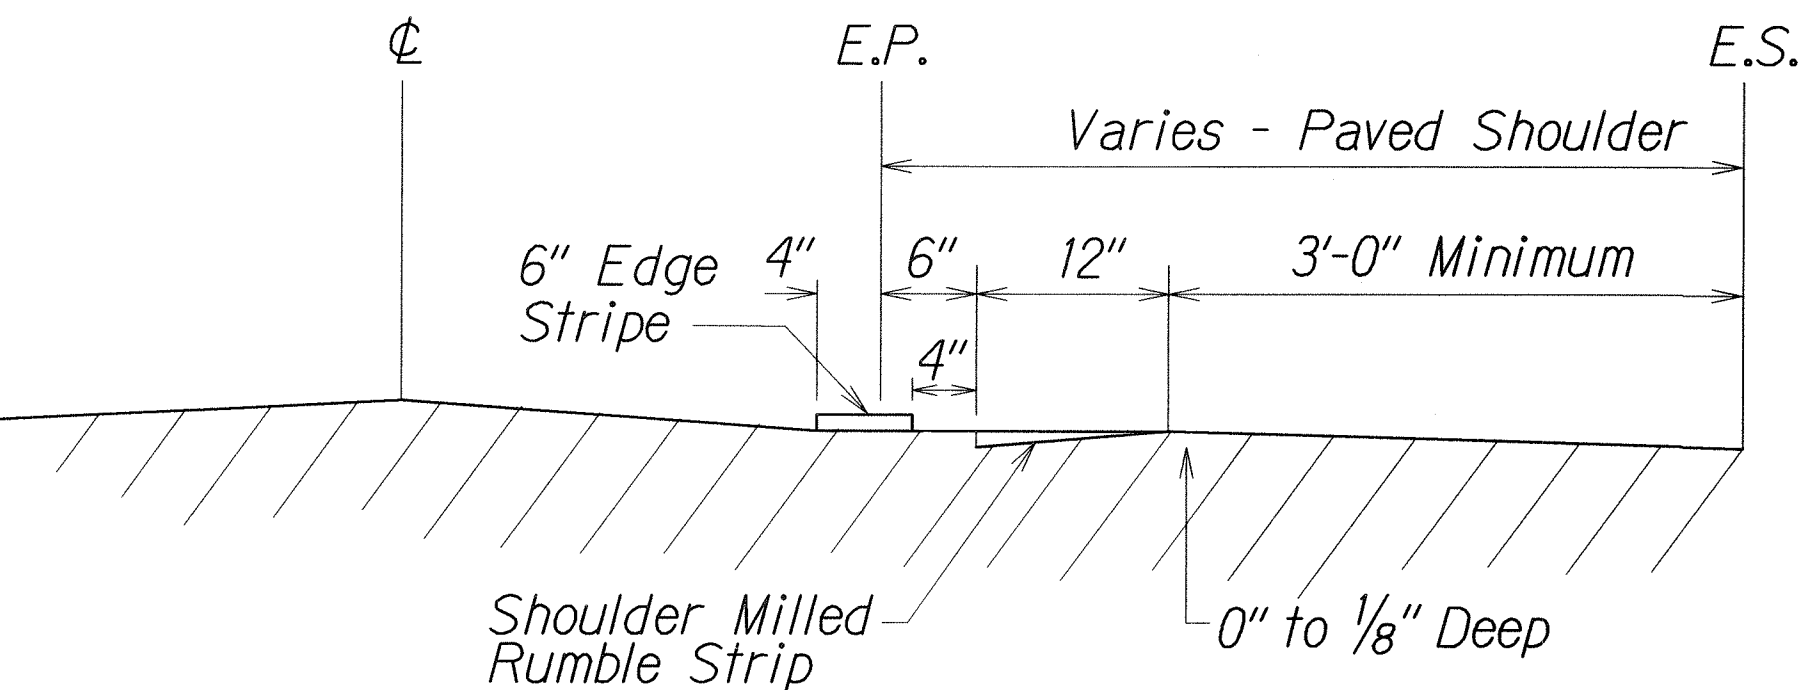

LONGITUDINAL SECTION - SHOULDER MILLED RUMBLE STRIP
Not to Scale

NOTES:

- Shoulder milled rumble strips may be installed for paved shoulder width of 4.5' or more from edge of pavement (E.P.).
- The method of constructing the shoulder milled rumble strip shall be submitted to the Engineer for acceptance prior to the actual work.
- Dimensions shown are approximate. Adjust rumble strip spacing to coordinate with pavement marking prior to installation.
- Raised pavement markers shall be installed on level surface between the rumble strips. Do not install raised pavement markers inside the milled area.
- The construction of the shoulder milled rumble strip and 13-foot gaps shall be paid for under Item No. 615.0200 - 12-Inch Milled Rumble Strip, Shoulder.
- The milling apparatus, 20 L.F. - 6" white stripe, and removal of existing pavement markings will not be paid for separately and shall be considered incidental to Item 615.0200 - 12-Inch Milled Rumble Strip, Shoulder.
- Rumble strips shall be installed along all shoulders, except at right turn deceleration and acceleration lanes, as noted on the plans.
- Do not place Type "C" Raised Pavement markers within 2 ft. of the 13 ft. Rumble Strip opening.
- Do not install edgeline rumble strips on bridge decks.
- Where at-grade bridges are present, rumble strips shall end/begin 20 L.F. beyond the existing bridge deck joints/concrete approach slab.
- Shoulder Rumble Strips are to be installed after the edge of pavement stripe and before the installation of the Type "C" raised pavement markers.

01/19/12	Deleted Hot Spray Thermoplastic Note
DATE	REVISION
STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION SHOULDER MILLED RUMBLE STRIP DETAIL FOR SHOULDER 4.5' OR MORE VOLCANO ROAD Pavement Preventive Maintenance, I/B Lanes Kea'au Bypass Road to Panaewa Bridge Federal Aid Project No. STP-011-2(39) Scale: As Shown Date: Sept., 2010	
SHEET No. T3 OF 14 SHEETS	

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
142.mey	TRACED BY	
142.mey	CHECKED BY	
142.mey		

*If shoulder width is less than 6', do not install shoulder rumble strip where guardrail exists.