


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	HC-01-73 250-01-73 104-01-73	1973	9	14

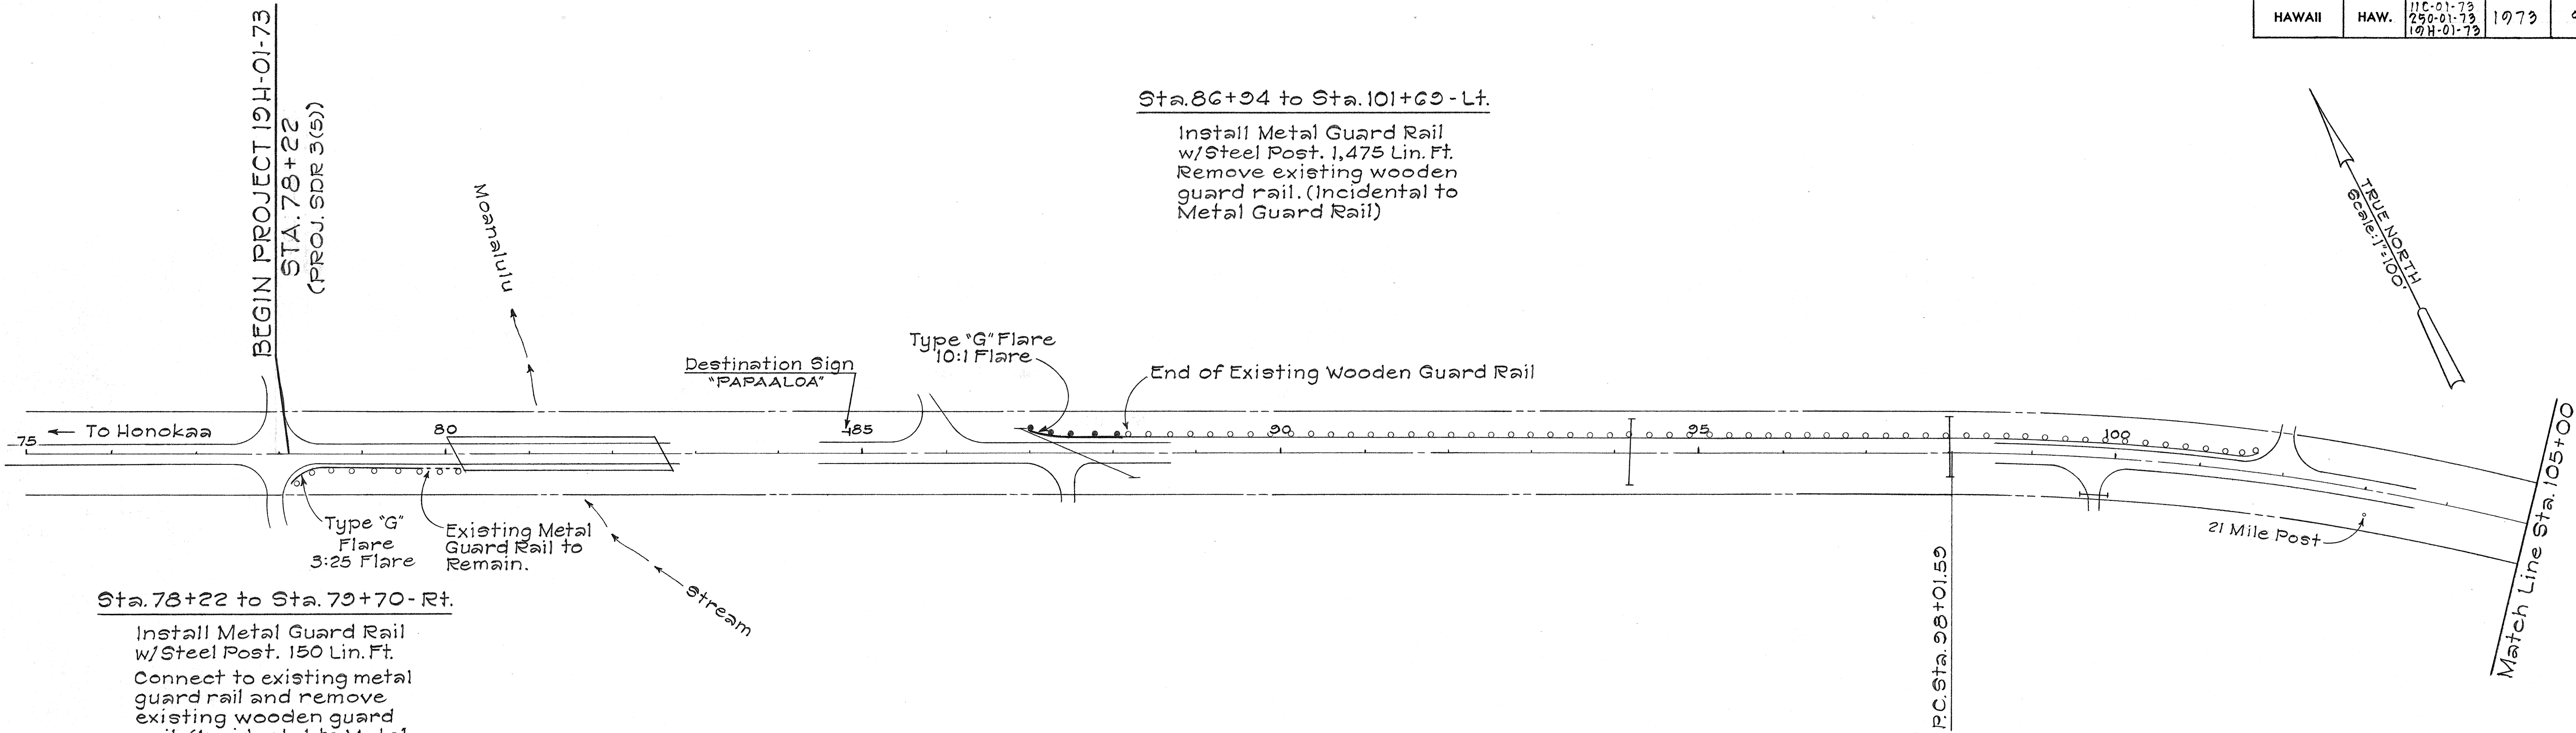


Sta. 78+22 to Sta. 79+70 - Rt.

Install Metal Guard Rail w/ Steel Post. 150 Lin. Ft. Connect to existing metal guard rail and remove existing wooden guard rail. (Incidental to Metal Guard Rail)

Sta. 110+25 to Sta. 111+00 - Lt.

Install Metal Guard Rail w/ Steel Post. 75 Lin. Ft. Remove existing wooden guard rail. (Incidental to Metal Guard Rail)

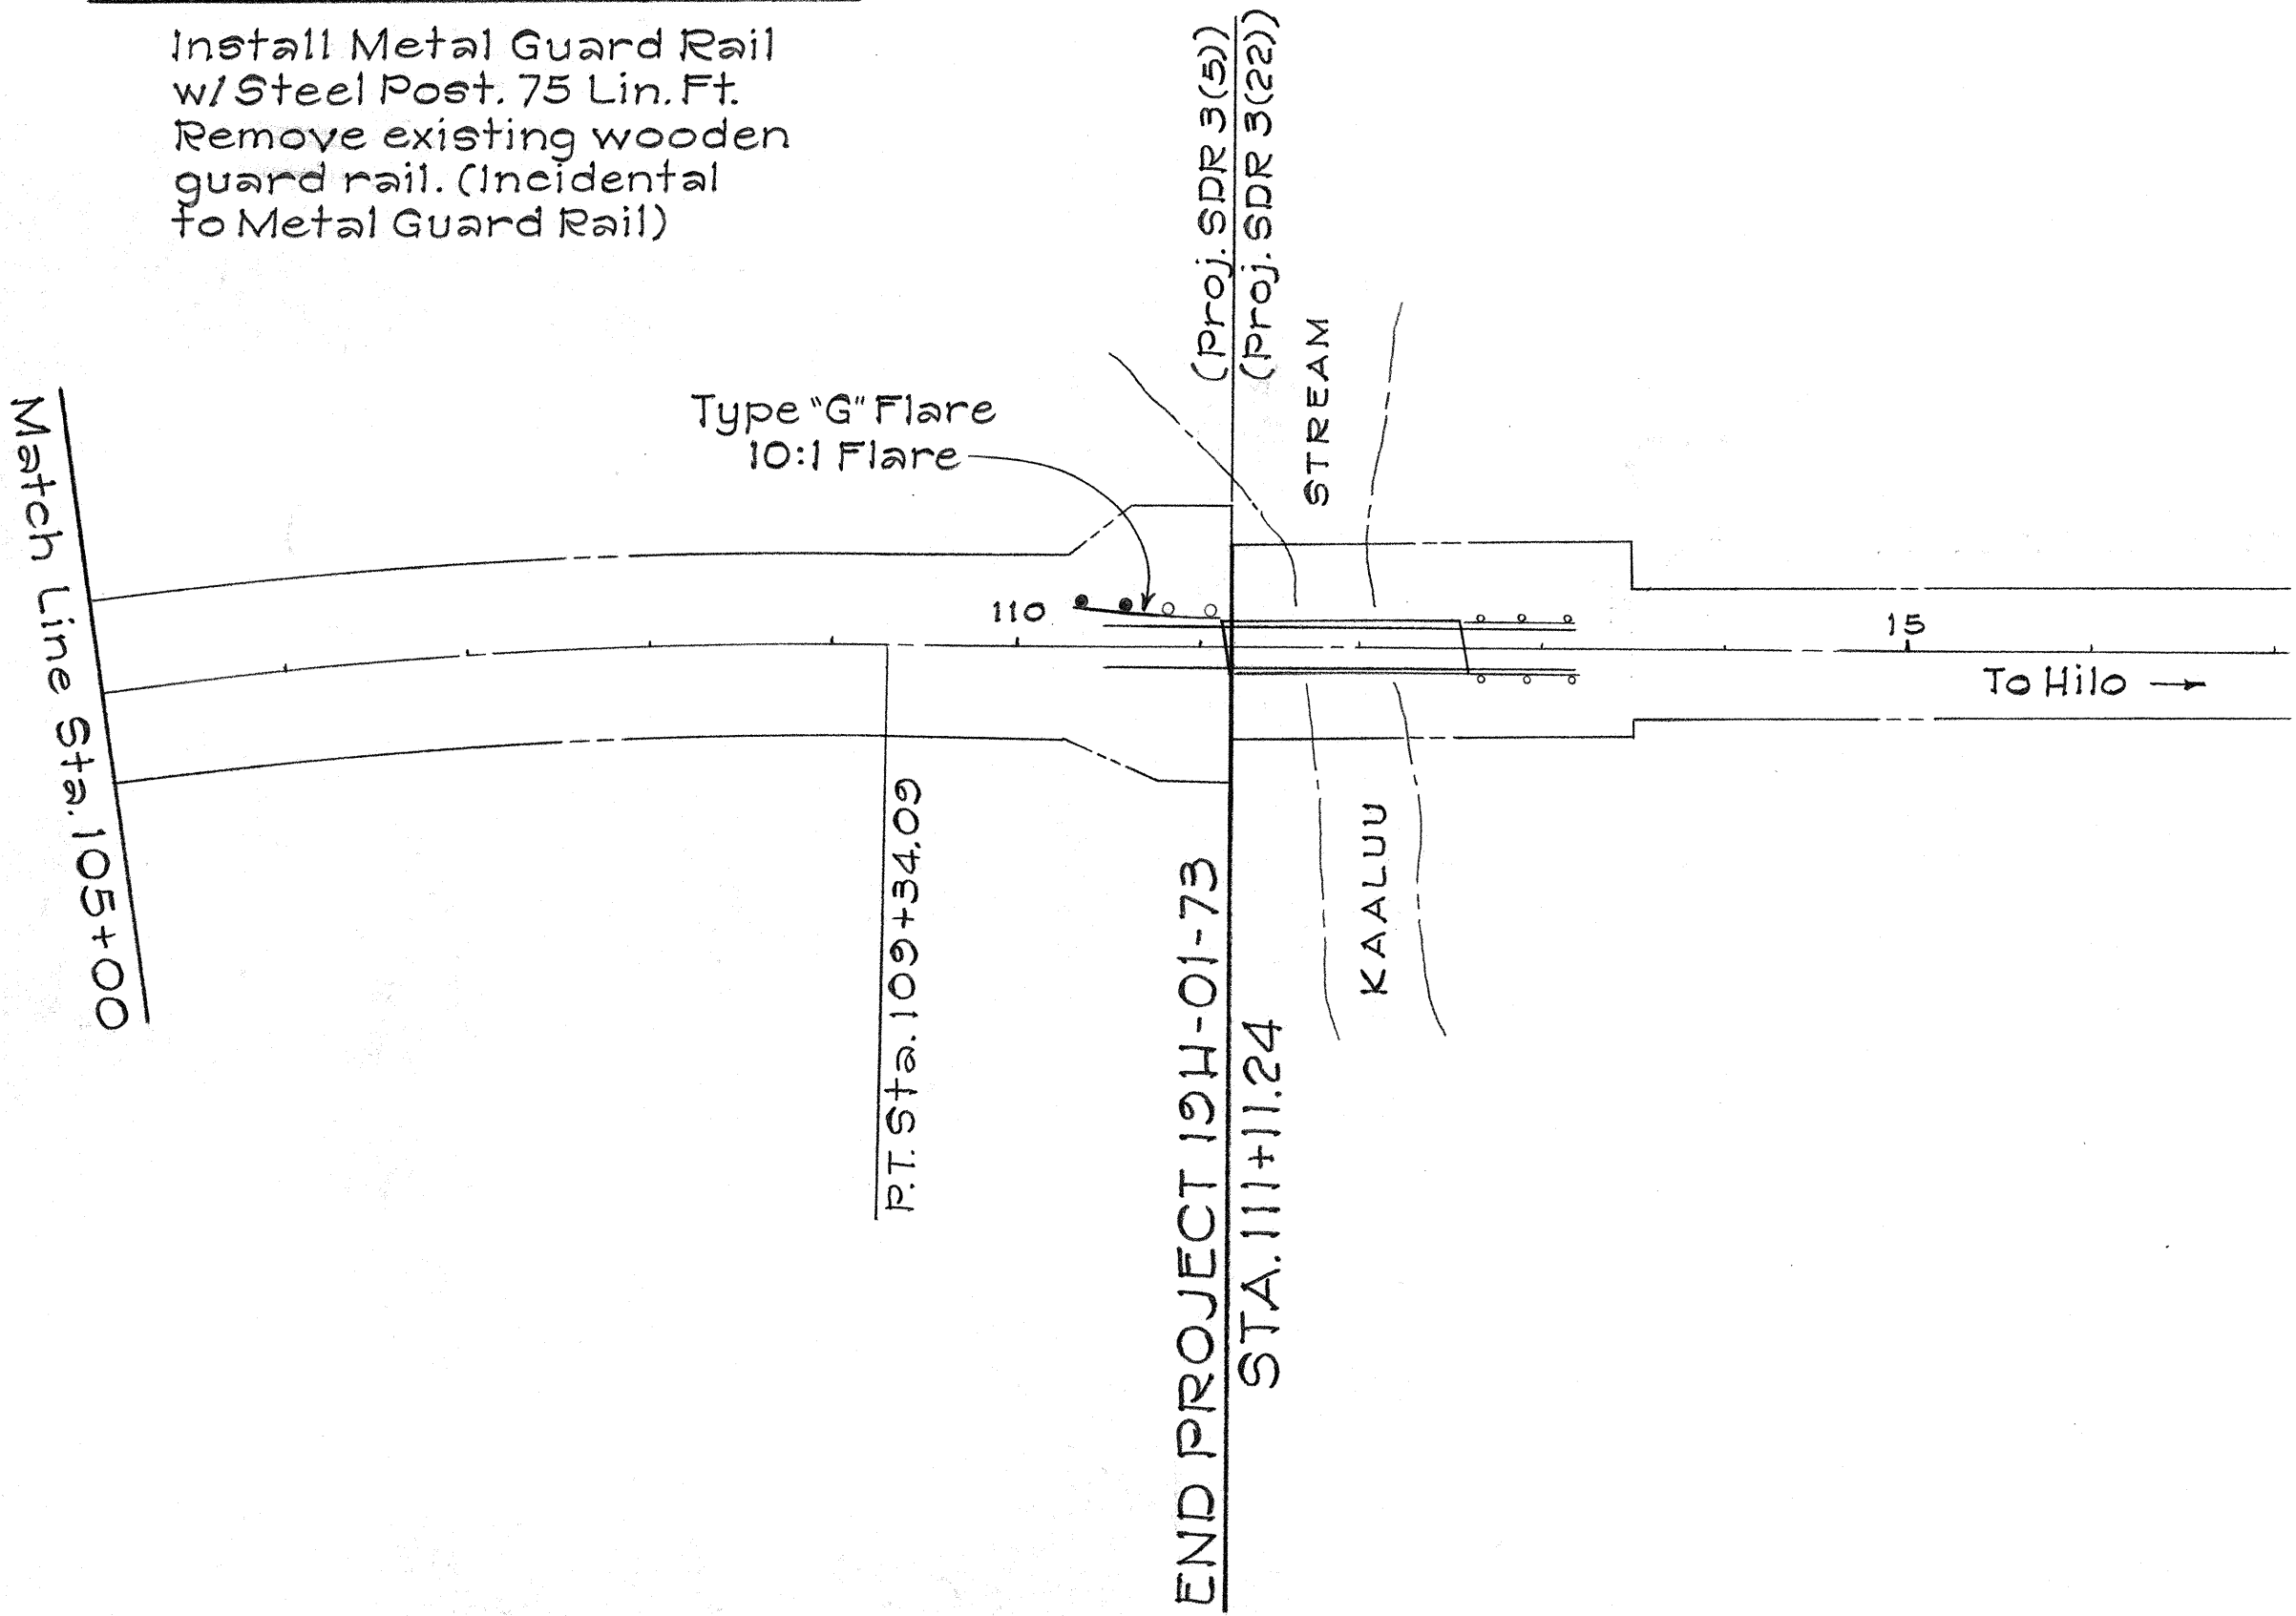

General Notes

- The Contractor shall stockpile all concrete guard rail posts at Sta. 110+00-Left near the end of the project. The stockpiling of posts shall be incidental to the installation of metal guard rail. The concrete posts will remain the property of the State.

LEGEND

- Existing Metal Guard Rail to Remain.
- Existing Wooden Guard Rail to be replaced with New Metal Guard Rail w/ Steel Post.
- New Metal Guard Rail w/ Steel Post to be Installed.

DATE	_____
DESIGNED BY	_____
TRACED BY	_____
NOTED BY	_____
CHECKED BY	_____
ORIGINAL PLAN	_____
NOTE BOOK	_____
No.	_____

STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION PLANS FOR GUARD RAIL IMPROVEMENTS

HAWAII BELT ROAD
PROJECT No. 104-01-73
NORTH HILO, HAWAII

Scale: As Noted Date: October 1972

SHEET No. 1 OF 1 SHEETS