


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	HWY-H-03-95M	1995	5	5

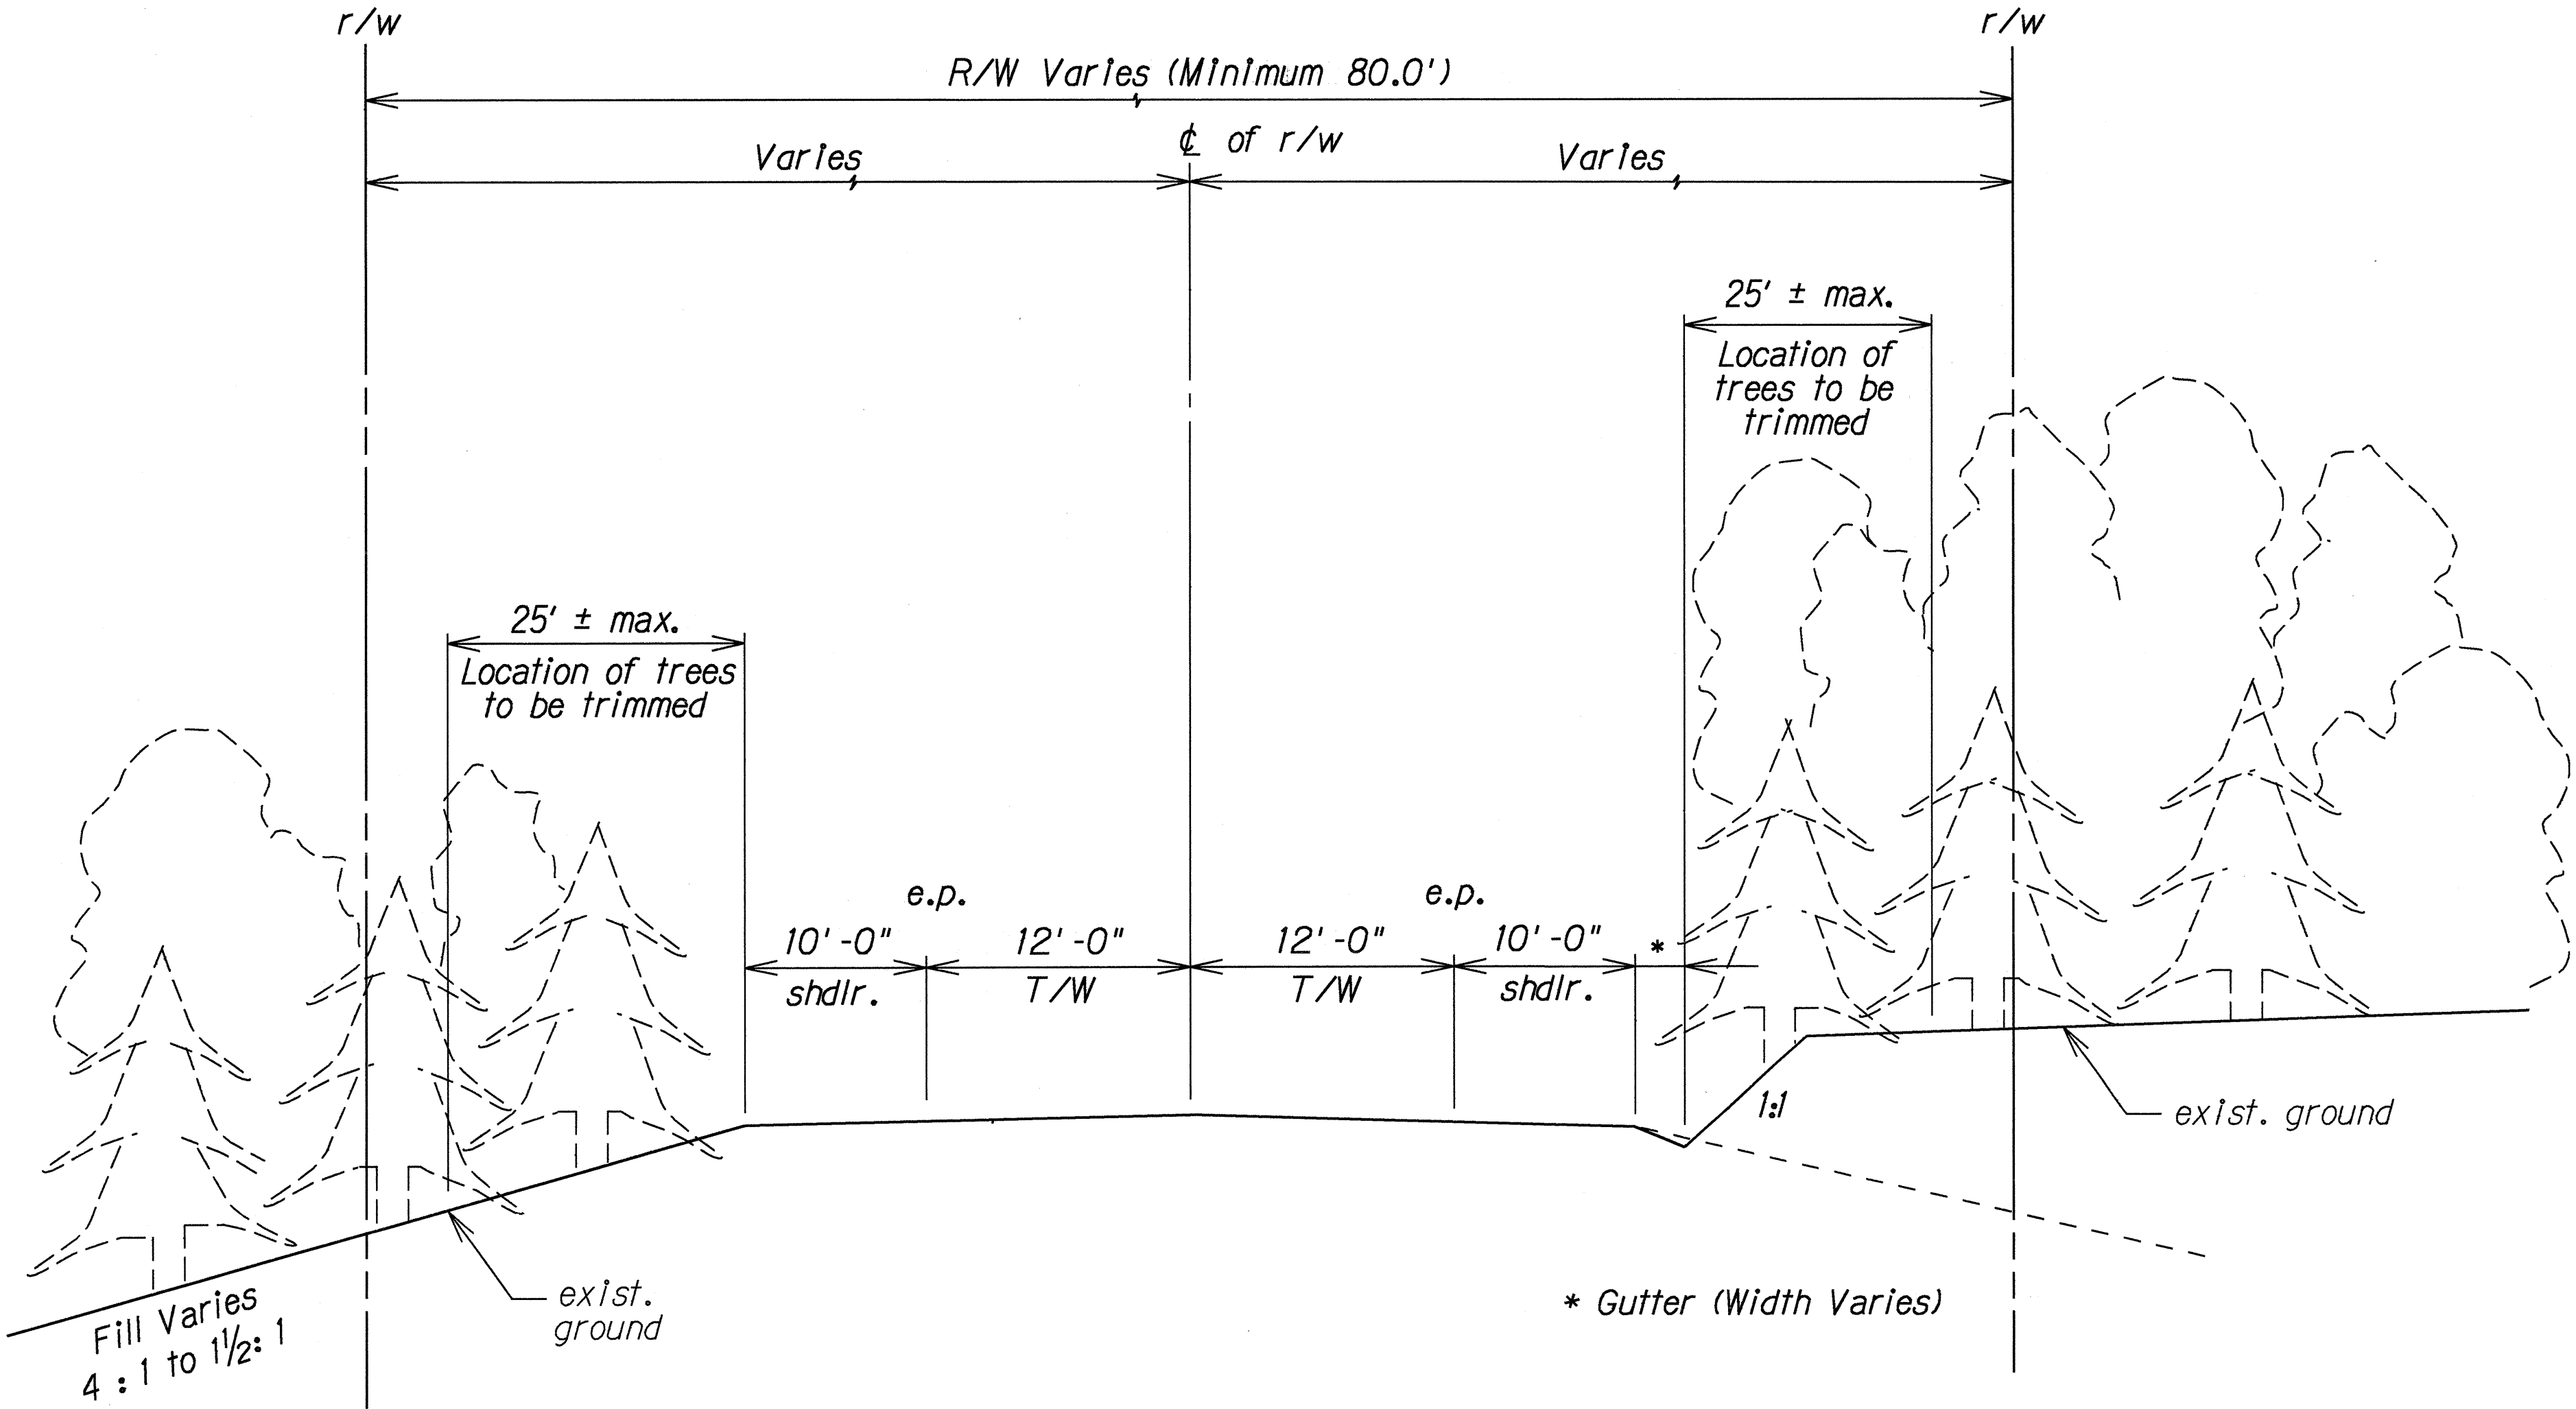

Notes For Work Along Volcano Road:

1. The work for this site consists of trimming trees, disposal of debris, herbicide treatment of remnant stumps, traffic control, and planting seedlings.
2. Contractor shall be responsible for thoroughly familiarizing themselves with the site conditions prior to tendering a bid.
3. Each tree to be removed is marked with blue flagging ribbon. Approximate quantity is 82 trees.
4. Contractor shall plant two tree seedlings for every tree cut. The seedlings shall be planted no closer than 25 feet from edge of paved shoulder, in the immediate vicinity of the cut tree . Prior to planting, the Contractor shall prepare the ground by clearing all vegetation within a ten foot radius and covering it with a uniform 2-inch layer of wood chips. The State shall provide the Contractor with the tree seedlings at no cost. The Contractor shall be responsible for picking up the seedlings at the Department of Land and Natural Resources, Kamuela Tree Nursery. The exact species of the trees to be used has not yet been determined. The Engineer shall provide this information to the Contractor prior to the Notice to Proceed date. Preparation, transporting, and planting of tree seedlings shall not be measured for payment and shall be considered incidental to tree trimming pay items.
5. Contractor's attention is called to Special Provision Section 688. Payment shall be made per unit quantity each for the Volcano Road Area.

TYPICAL SECTION ALONG VOLCANO ROAD - ROUTE 11

Not To Scale

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTES BOOK	DRAWN BY	
hybrids	CHECKED BY	
No. dgn		

STATE OF HAWAII  
DEPARTMENT OF TRANSPORTATION  
HIGHWAYS DIVISION

**TYPICAL SECTION**

**ALONG VOLCANO ROAD**

TRIMMING OF TREES & SHRUBS

VARIOUS LOCATIONS, ISLAND OF HAWAII

PROJECT NO. HWY-H-03-95M

Scale: As Noted      Date: April, 1995

SHEET No. 1 OF 1 SHEETS