

**STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION**

**ADDENDUM NO. 1
for
MAMALAHOA HIGHWAY GUARDRAIL REPAIRS
VICINITY OF KAHUKU
PROJECT NO. 11E-01-10M
DISTRICT OF KAU
ISLAND OF HAWAII**

The following amendments shall be made to the Bid Documents:

A. PROPOSAL SCHEDULE

1. Replace proposal schedule pages P-10 through P-12 dated 5/26/10 with the attached revised proposal schedule pages P-10 through P-12 dated 6/21/10.

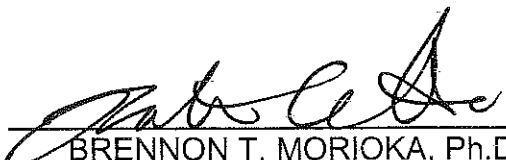
B. PLANS

1. Add plan sheet no. Add. S-1 – Milled Rumble Strip detail.
2. Replace plan sheets no. 7, 8, 29, 30, and 31 with Add.7, Add.8, Add.29, Add.30, and Add.31 respectively.

C. PRE-BID MEETING MINUTES

1. Conference minutes and sign-in sheet are attached for information.

Please acknowledge receipt of this Addendum No. 1 by recording the date of its receipt in the space provided on page P-4 of the Proposal.


BRENNON T. MORIOKA, Ph.D., P.E.
Director of Transportation

Addendum No. 1
6/21/10

PROPOSAL SCHEDULE					
ITEM NO.	ITEM	APPROX. QUANTITY	UNIT	UNIT PRICE	AMOUNT
202.0100	Removal of Existing Guardrail	LS	L.S.	L.S.	\$ _____
209.0100	Installation, Maintenance, Monitoring, and Removal of BMP	F.A.	F.A.	F.A.	\$ <u>25,000.00</u>
209.0200	Additional Water Pollution, Dust, and Erosion Control	F.A.	F.A.	F.A.	\$ <u>25,000.00</u>
401.0400	HMA Pavement Mix No. IV at Sta. 366+00 ~ 374+00	250	Ton	\$ _____	\$ _____
401.0500	HMA Pavement Mix V, Shoulder Paving	1,404	Ton	\$ _____	\$ _____
401.0501	HMA Pavement Mix V, Leveling at Sta. 367+13 ~ 369+04	215	Ton	\$ _____	\$ _____
415.0100	Cold Planing at Sta. 366+00 ~ 374+00	L.S.	L.S.	L.S.	\$ _____
606.0300	Guardrail type 3 – Single with Steel Posts	13,600	L.F.	\$ _____	\$ _____
606.0500	Boring or Augering of Guardrail Posts	384	Each	\$ _____	\$ _____
606.7000	Terminal Section, Type "FLEAT 350", TL-2	11	Each	\$ _____	\$ _____
606.7200	Terminal Section, Type "G"	8	Each	\$ _____	\$ _____
606.7500	Terminal Section, Type "Modified A-1"	13	Each	\$ _____	\$ _____
613.0100	Reconstruct Centerline and Reference Survey Monuments	4	Each	\$ _____	\$ _____

PROPOSAL SCHEDULE					
ITEM NO.	ITEM	APPROX. QUANTITY	UNIT	UNIT PRICE	AMOUNT
615.0100	16-Inch Milled Rumble Strips, Centerline	L.S.	L.S.	L.S.	\$ _____
615.0300	12-Inch Milled Rumble Strips, Shoulder	L.S.	L.S.	L.S.	\$ _____
629.0100	Double 4-Inch Pavement Striping, Yellow (Thermoplastic Extrusion), Centerline	L.S.	L.S.	L.S.	\$ _____
629.0200	Single 4-Inch Pavement Striping, White (Thermoplastic Extrusion), Shoulder	L.S.	L.S.	L.S.	\$ _____
631.0100	Regulatory Sign (10 Square Feet of Less) with Post	L.S.	L.S.	L.S.	\$ _____
631.0200	Regulatory Sign (Greater than 10 Square Feet) with Post	L.S.	L.S.	L.S.	\$ _____
632.0100	Warning Sign (10 Square Feet of Less) with Post	L.S.	L.S.	L.S.	\$ _____
632.0200	Warning Sign (Greater than 10 Square Feet) with Post	L.S.	L.S.	L.S.	\$ _____
632.0300	Mile Post Marker and Route Number Plate with Post (Bi-Directional)	L.S.	L.S.	L.S.	\$ _____
632.0500	Reflector Marker (RM-2 Bi-directional on Flex Post)	L.S.	L.S.	L.S.	\$ _____
645.1000	Traffic Control	L.S.	L.S.	L.S.	\$ _____
645.2000	Additional Police Officers And/or Additional Control Devices and Advertisement	F.A.	F.A.	F.A.	\$ <u>50,000.00</u>
648.0100	Field-Posted Drawings	L.S.	L.S.	L.S.	\$ _____

PROPOSAL SCHEDULE					
ITEM NO.	ITEM	APPROX. QUANTITY	UNIT	UNIT PRICE	AMOUNT
696.0100	Field Office Trailer (Not to Exceed \$50,000)	L.S.	L.S.	L.S.	\$ _____
696.0220	Maintenance of Trailers	F.A.	F.A.	F.A.	\$ <u>15,000.00</u>
699.1000	Mobilization (Not to Exceed 10 Percent of the Sum of All Items Excluding the Bid Price of this Item, and Force Account Items)	L.S.	L.S.	L.S.	\$ _____
Sum of All Items					\$ _____
NOTE: Bidders must complete all unit prices and amounts. Failure to do so may be grounds for rejection of bid.					

DEPARTMENT OF TRANSPORTATION
MEMORANDUM FOR THE RECORD

DATE: June 15, 2010

HIGHWAYS

DIVISION

HAWAII DISTRICT

BRANCH OR SECTION

PURPOSE OF MEETING: NON-MANDATORY PRE-BID CONFERENCE for:
MAMALAHOA HIGHWAY GUARDRAIL REPAIRS
VICINITY OF KAHUKU
PROJECT NO. 11E-01-10M

DATE, TIME & PLACE:

June 15, 2010, 9:00 A.M., Hawaii District Office (50 Makaala St., Hilo, HI. 96720)

PARTICIPANTS:

See attached Sign-In Sheet

BRIEF SUMMARY OF MEETING:

1. Comment: The contract plans is missing the rumble strip-details and limits:
Response: An addendum sheet no S-1 will be provided. The limits are from Sta. 364+00 to Sta. 375+00.
2. Question: Is there enough suitable material to dress the shoulder and-to fill and level the unpaved shoulder areas?
Response: Yes, and the State will provide cold planed material to dress and level the unpaved shoulder areas. The stockpile will be at the Naalehu Baseyard.
3. Question: Will the State consider a pay item to patch the damaged AC pavement around the guardrail posts?
Response: Not at this time.

Meeting adjourned at 9:40 a.m.

Project: Mamalahoa Highway Guardrail Repairs,

Vicinity of Kahuku

Project No.: 11E-01-10M

Date, Time, Location: 6/15/10, 09:00 A.M., 50 Makaala St., Hilo, HI 96720

[illegible]