



FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-019-2(32)	1995	12	26

PLAN VIEW	DESCRIPTION
	4 each Type A Raised Pavement Markers Type C Raised Pavement Markers @ 40' - 0" o.c.
	4 each Type J Raised Pavement Markers Type D Raised Pavement Markers @ 40' - 0" o.c.
	8" White Stripe with Type C Raised Pavement Markers @ 20' - 0" o.c. (Tape, Type I or Thermoplastic Extrusion)
	4" Double Solid Yellow with Type D Raised Pavement Markers @ 20' - 0" o.c. (Thermoplastic Extrusion)
	4" Double Solid Yellow Stripes with Type H Raised Pavement Markers @ 20' - 0" o.c. (Tape, Type II or Thermoplastic Extrusion)
	4" Yellow Edge Stripe with Type H Raised Pavement Markers @ 40' - 0" o.c. (Tape, Type II or Thermoplastic Extrusion)
	Lane Change Restriction Marking 4 each Type A Raised Pavement Markers Type C Raised Pavement Markers @ 20' - 0" o.c. 4" White Stripe (Tape, Type I or Thermoplastic Extrusion)
	4" or 8" White Edge Stripe with Type C Raised Pavement Markers @ 40' - 0" o.c. (Thermoplastic Extrusion)
	4" White Guide Lines (Thermoplastic Extrusion)
	Transverse Median Marking (Tape, Type II or Thermoplastic Extrusion)
	Transverse Shoulder Marking
	Channelizing Island or Deceleration Lane Gore (Thermoplastic Extrusion)
	Crosswalk and Stop Line. All Stop Lines shall be 10' - 0" from Crosswalk unless otherwise noted.
	Pavement Arrow (Tape, Type I or Thermoplastic Extrusion) Pavement Word (Tape, Type I or Thermoplastic Extrusion)
	Extension of Edge Line, 4" Wide x 2' - 0" Long White Stripe @ 10' - 0" o.c. w/Type C Markers @ 40' - 0" o.c. (Thermoplastic Extrusion)

- NOTES**
- Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
 - Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
 - Raised pavement markers shall not be installed within crosswalks.
 - Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
 - All pavement striping shall be as noted on the Legend or plans.
 - All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
 - Contractor shall obtain blue raised pavement markers from County of Hawaii Fire Department and install them at the direction of the Engineer. The cost of installing the markers shall be incidental to other contract items.
 - A.C. Curb to be Bituminous Curb, Type 6 and painted white. Paint to be incidental to item 607.6000 Bituminous Curb, Type 6.
 - For Pavement Marking Schedule see Sheet Nos. 17 & 18.

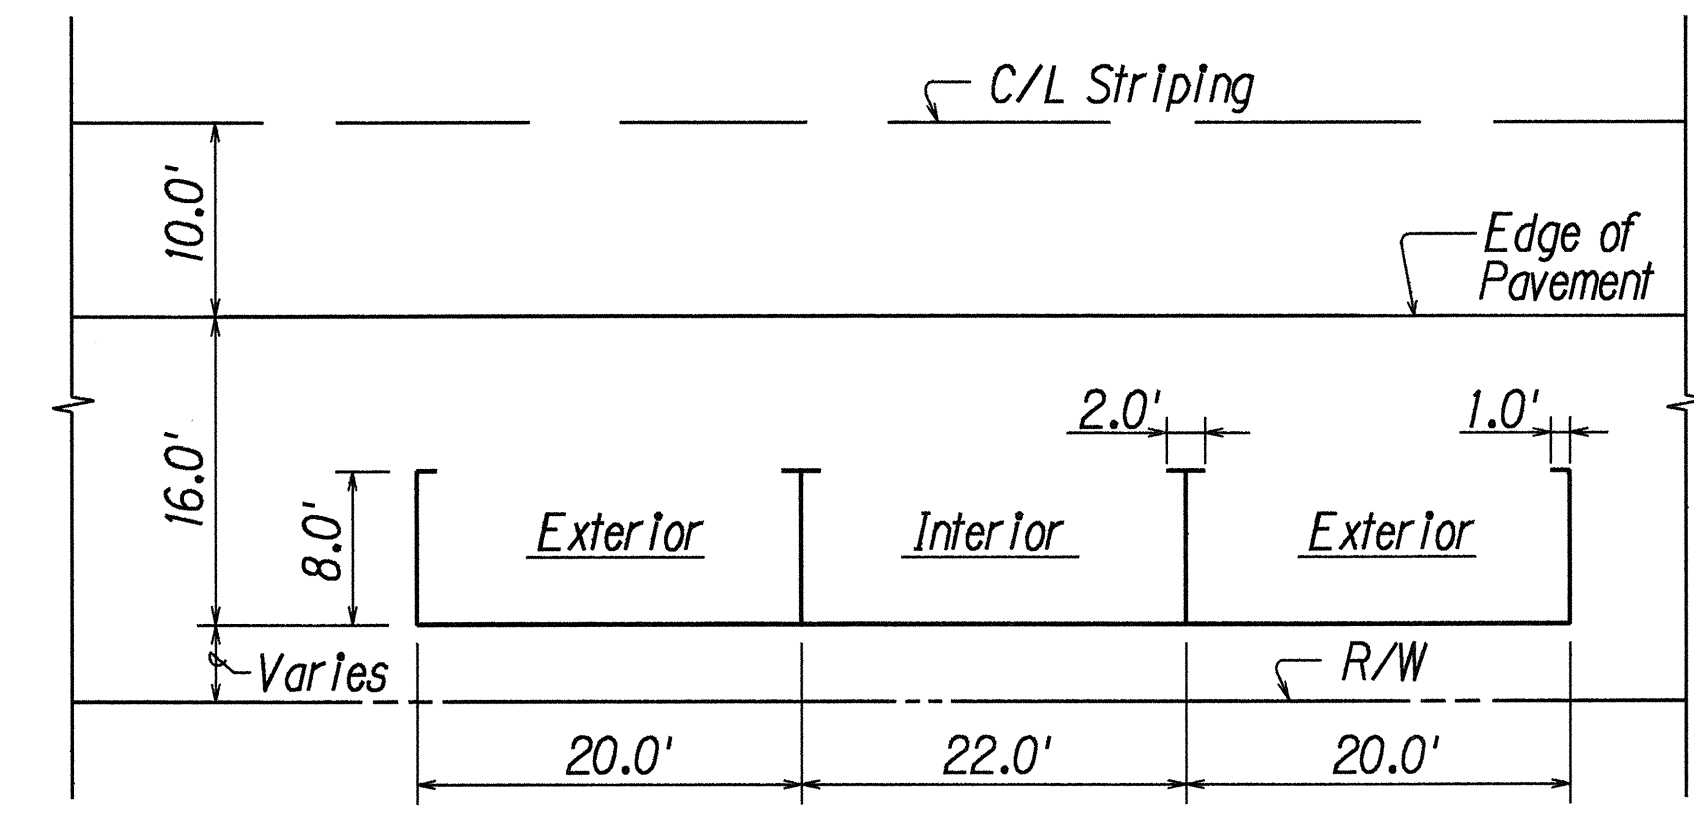

PARALLEL PARKING DETAIL
Not to Scale

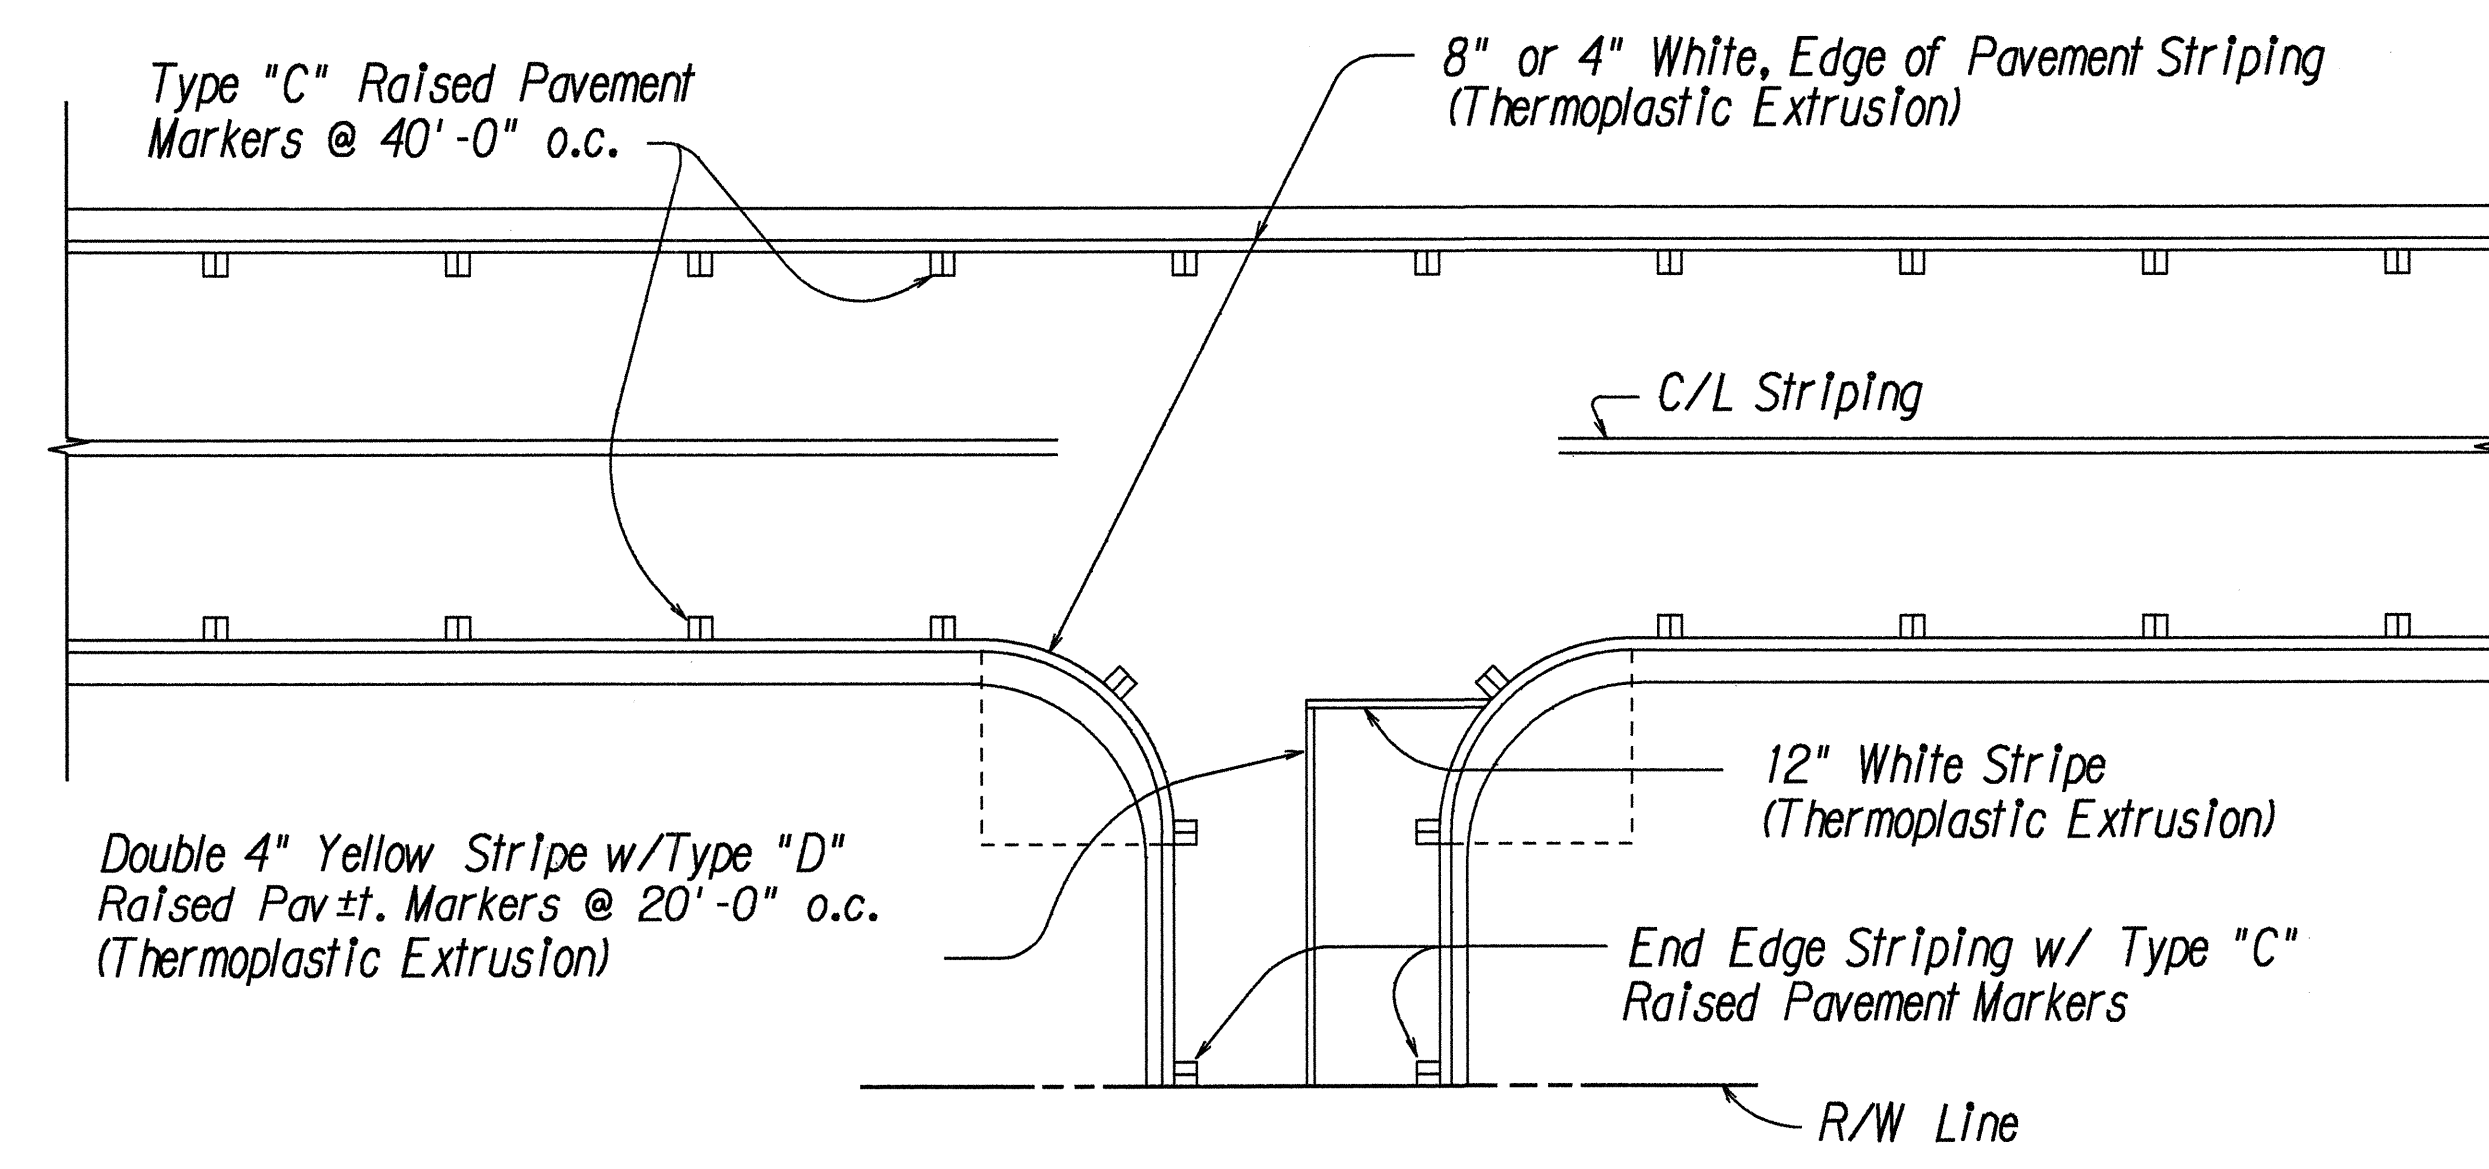

TYPICAL EDGE OF PAVEMENT MARKING
Not to Scale

DATE	10/1/95
SURVEY PLOTTED BY	XXX
DESIGNED BY	XXX
TRACED BY	XXX
NOTE BOOK	DESIGNED BY
QUANTITIES BY	XXX
CHECKED BY	XXX

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PAVEMENT MARKING
LEGEND, DETAILS & NOTES

KAMEHAMEHA AVENUE RESURFACING
WAILOA BRIDGE TO KUHIO WHARF
F.A. PROJECT NO. STP-019-2(32)

Scale: As Noted Date: April, 1995

SHEET No. 1 OF 1 SHEETS