



FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	11B-01-96M	1996	32	32

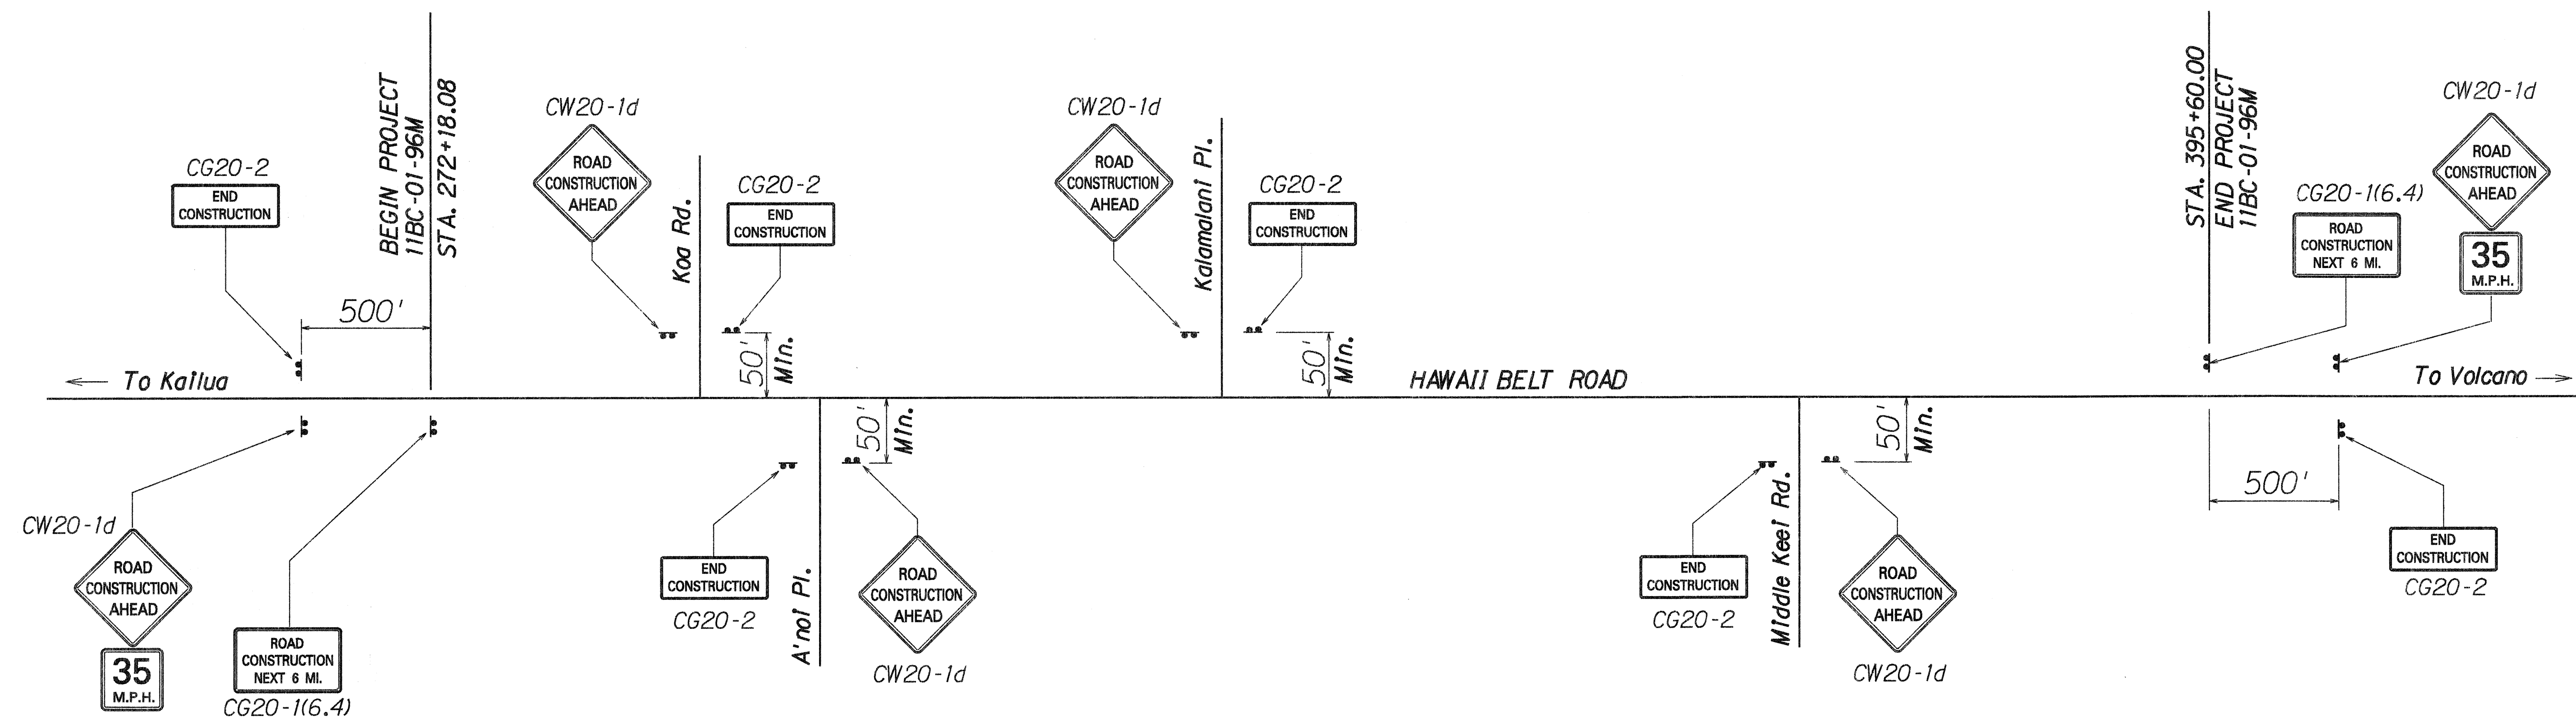

CONSTRUCTION SIGN PLAN
Not To Scale

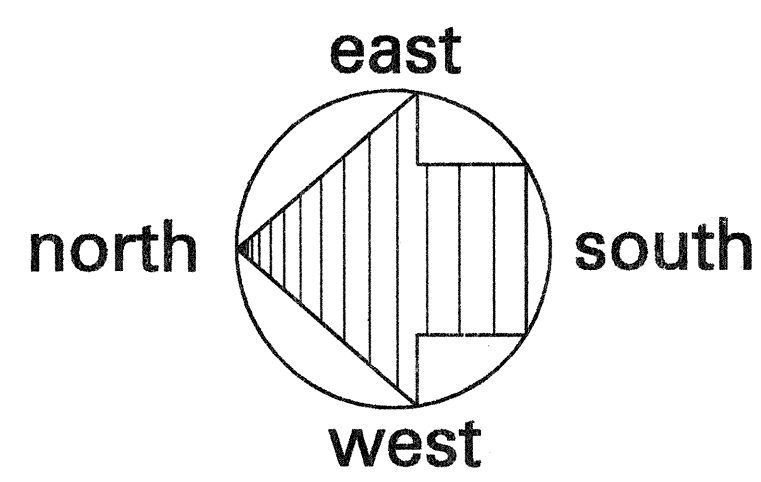

CONSTRUCTION SIGN SCHEDULE					
ROAD AND LOCATION *	ROUTE II CENTERLINE STATION **			ITEM No. 621.7121 (no posts)	ITEM No. 621.7120 (two posts)
		LEFT	RIGHT		
Hawaii Belt Road	277+18.08		●		CW20-1d
	277+18.08		●	CW13-1(35)	
	277+18.08	●			CG20-2
	272+18.08		●		CG20-1(6)
Koa Road	268+90		●		CG20-2
	268+90	●			CW20-1d
A'no'i Place	258+75	●			CW20-1d
	258+75		●		CG20-2
Kalamalani Place	240+24	●			CW20-1d
	240+24		●		CG20-2
Middle Keel Road	79+76		●		CW20-1d
	79+76	●			CG20-2

CONSTRUCTION SIGN SCHEDULE (continued)					
ROAD AND LOCATION *	ROUTE II CENTERLINE STATION **			ITEM No. 621.7121 (no posts)	ITEM No. 621.7120 (two posts)
		LEFT	RIGHT		
Hawaii Belt Road	395+60.00	●			CG20-1(6)
	400+60.00	●			CW20-1d
	400+60.00	●		CW13-1(35)	
	400+60.00		●		CG20-2
Total Construction Signs				2	14

* - Final locations of all signs to be determined in the field by the Engineer.
** - Signs erected on side roads must be located 50' (Min.) from E.P. of Hawaii Belt Road.

SURVEY PLOTTED BY	DATE
DRAWN BY	
TRACED BY	
CHECKED BY	
QUANTITIES BY	
NO. 31/10/96	
dd3/10/96	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**CONSTRUCTION SIGN
PLAN & SCHEDULE**

HAWAII BELT ROAD RESURFACING
KEALAKEKUA TO KIILAE
PROJECT NO. 11B-01-96M

Scale: As Shown Date: May, 1996

SHEET No. 1 OF 1 SHEETS