


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	NH-011-2(33)	1996	70	102

TRUE NORTH
SCALE: 1" = 20'

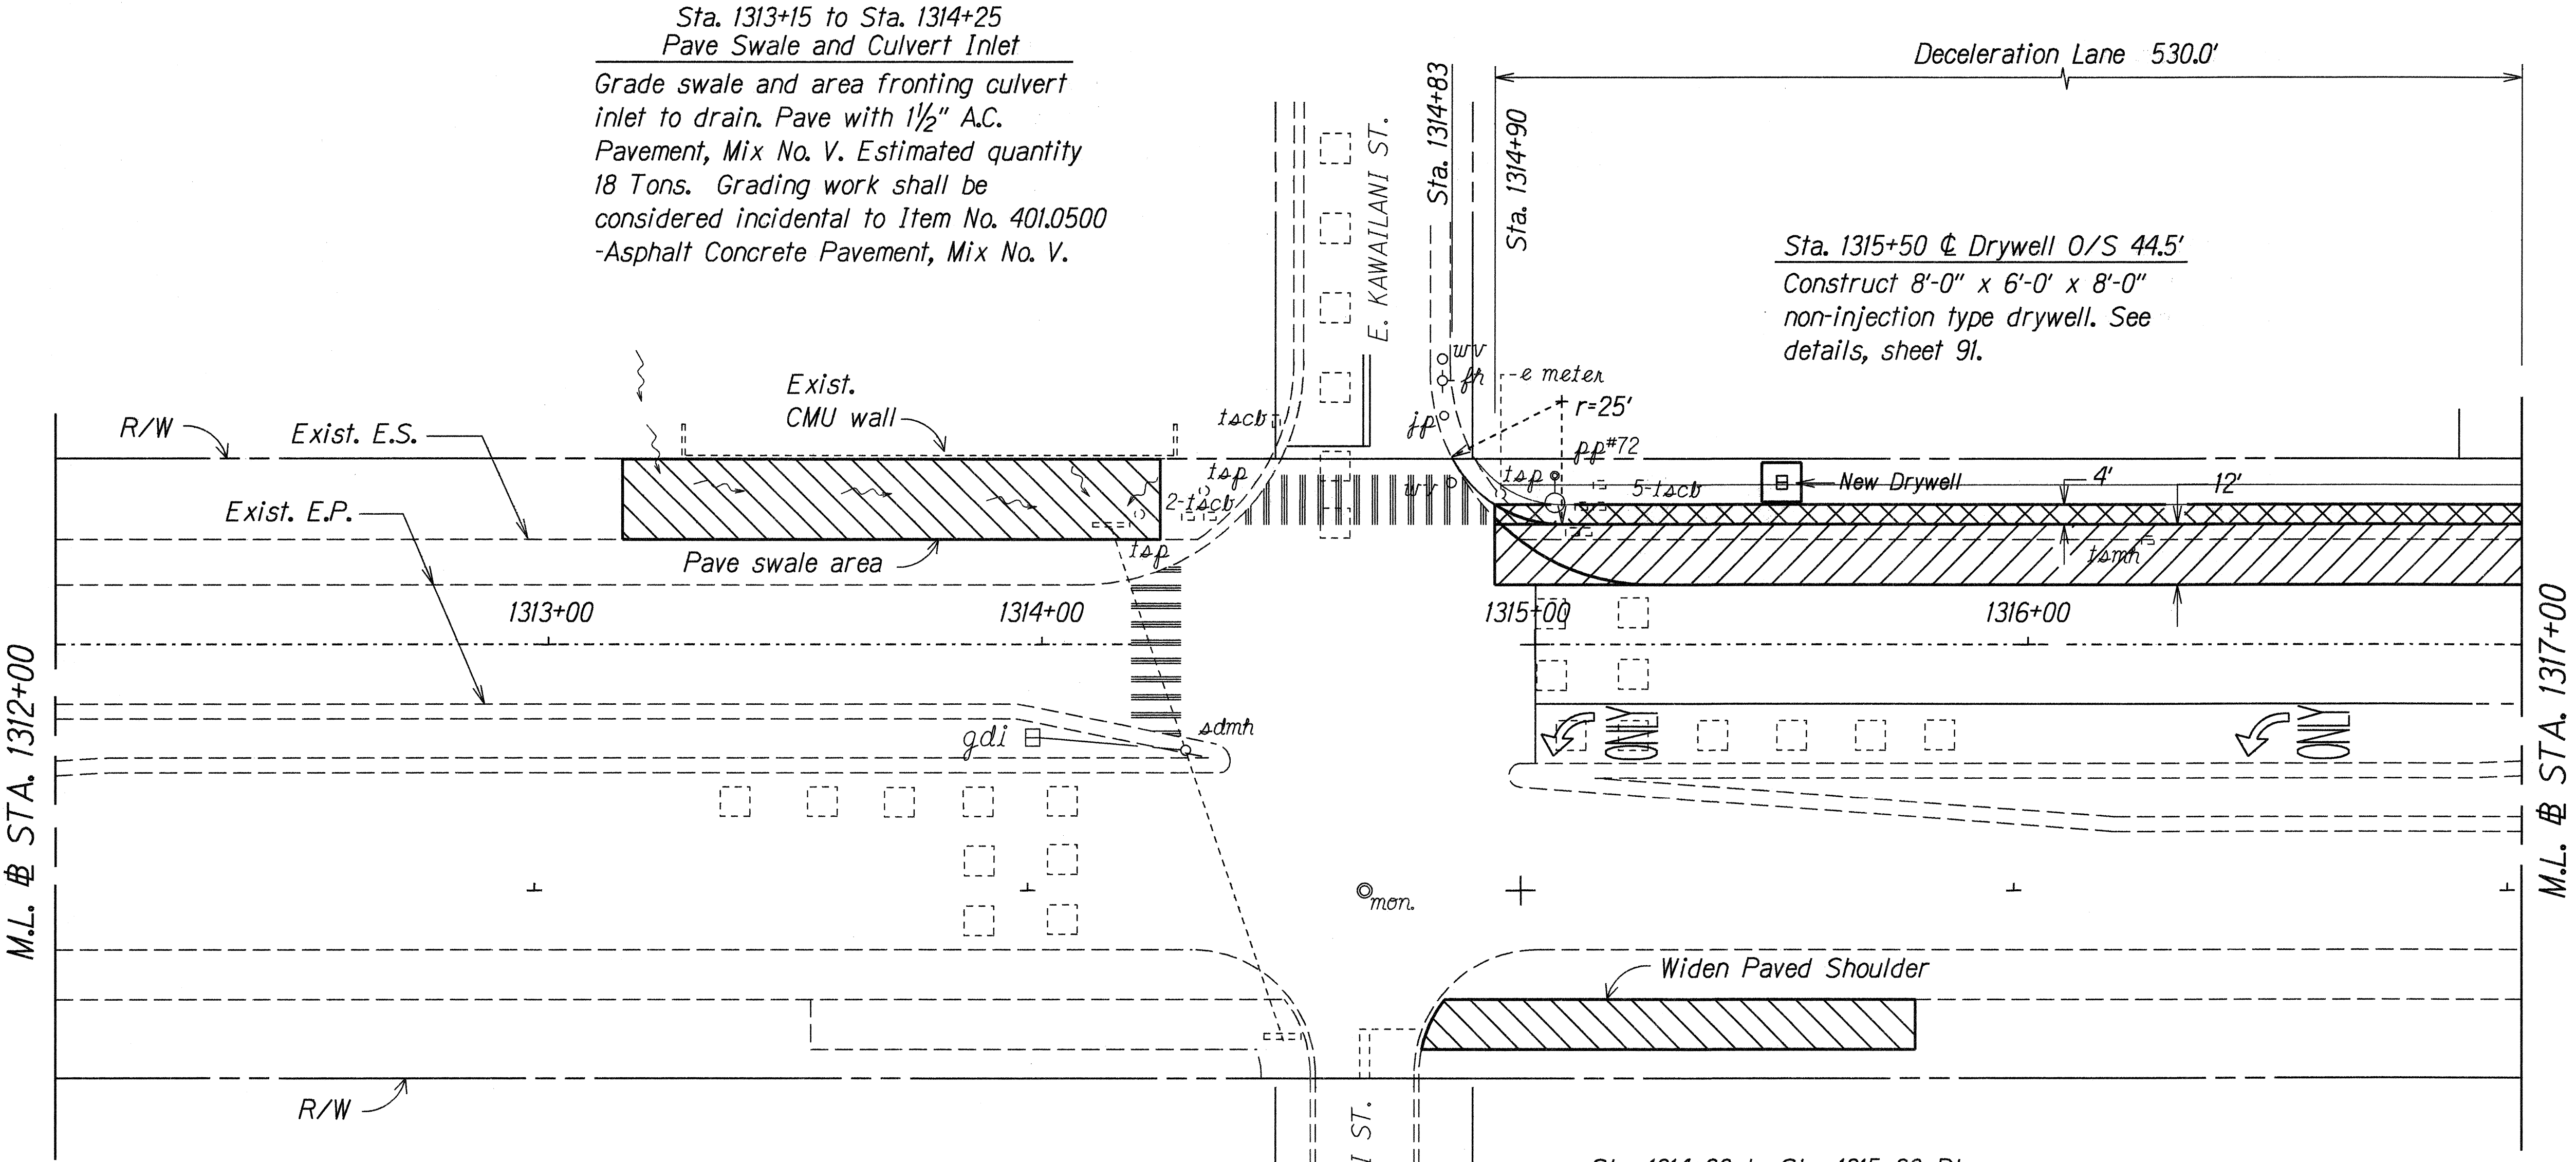

Sta. 1313+15 to Sta. 1314+25
Pave Swale and Culvert Inlet
Grade swale and area fronting culvert inlet to drain. Pave with 1 1/2" A.C. Pavement, Mix No. V. Estimated quantity 18 Tons. Grading work shall be considered incidental to Item No. 401.0500 -Asphalt Concrete Pavement, Mix No. V.

Sta. 1315+50 @ Drywell O/S 44.5'
Construct 8'-0" x 6'-0" x 8'-0" non-injection type drywell. See details, sheet 91.

Sta. 1314+80 to Sta. 1315+80 Rt.
Widen Paved Shoulder
Add 10 feet width to existing shoulder using 1 1/2" A.C. Mix No. IV and 4" Plant Mix Concrete Base Course. Estimated quantities:

- 110 s.y.excavation
- 30 tons.....Plant Mix Concrete Base Course
- 10 tons.....A.C. Mix No. IV

Grade and fill shoulder embankment with excavated material. This work shall be considered incidental to excavation work and no seperate payment shall be provided.

- Reconstruction for Shoulder
- Reconstruction for Deceleration Lane
- Additional Paving

ORIGINAL PLAN	DATE
DESIGNED BY	4/96
TRACED BY	
NOTED BY	
QUANTITIES BY	
CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

KAWAILANI STREET (OBL)
INTERSECTION DETAILS

KANOEHUA AVENUE RESURFACING
PANAHEA BRIDGE TO PUAINAKO ST.
F.A. PROJECT NO. NH-011-2(33)

Scale: 1"=20' Date: April, 1996

SHEET No. 1 OF 2 SHEETS

