


CENTERLINE AND REFERENCE SURVEY MONUMENT SCHEDULE					
PROJECT	STATION	MONUMENT TYPE	Adjust Existing Item No. 613.0110	Reconstruct Existing Item No. 613.0120	EXISTING DEPTH (FT.)
	113+93.47	T.S. MON.	1		0.11
	115+93.47	S.C. MON.	1		0.10
	128+32.91	C.S. MON.	1		0.12
	130+32.91	S.T. MON.	1		0.11
	138+50.00	P.O.T. MON.	1		0.10
	152+39.32	T.S. MON.	1		0.12
TOTALS			6		

MILEPOST AND ROUTE MARKER SCHEDULE						
PROJECT	STATION	LEFT	RIGHT	MILE POST D10-5 (12"X36") MILE POST NO. (RTE. NO.)	REMOVE	INSTALL WITH POST (BI-DIRECTIONAL)
	106+42		●	29 (11)	1	1
TOTALS					1	1

PAVEMENT MARKING SUMMARY	
DESCRIPTION	QUANTITY
PAVEMENT MARKERS	
Type A	130 Each
Type C	400 Each
Type D	200 Each
Type H	40 Each
Type J	130 Each
THERMOPLASTIC EXTRUSION or TAPE, TYPE I	
Double 4-Inch Pavement Stripe (Yellow)	3,300 L.F.
4-Inch Pavement Stripe (Yellow)	300 L.F.
4-Inch Pavement Stripe (White)	1540 L.F.
8-Inch Pavement Stripe (White)	500 L.F.
Pavement Arrow	14 Each
THERMOPLASTIC EXTRUSION or TAPE, TYPE II	
Double 4-Inch Pavement Stripe (Yellow)	1640 L.F.
4-Inch Pavement Stripe (White)	10800 L.F.
8-Inch Pavement Stripe (White)	600 L.F.
12-Inch Pavement Stripe (Yellow)	250 L.F.
12-Inch Pavement Stripe (White)	100 L.F.
THERMOPLASTIC EXTRUSION or TAPE, TYPE III	
12-Inch Pavement Stripe (White)	50 L.F.
4-Inch Guide Line Extension (White)	560 L.F.
Pavement Word	1 Each

GENERAL PLAN	DATE
NOTED BY	
DESIGNED BY	
CHECKED BY	
DATE	

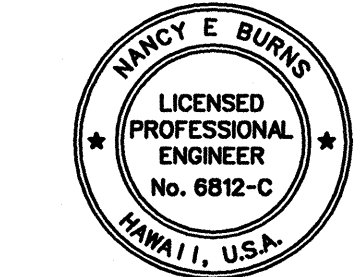

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION AND CONSTRUCTION OF THIS PROJECT WILL BE UNDER MY OBSERVATION.
Nancy E. Burns
DATE: 4/30/97

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

MISCELLANEOUS SCHEDULES

HAWAII BELT-ROAD
VICINITY OF PARK H.Q. ENTRANCE
PROJECT NO. 11HKL-01-97M
Scale: N.T.S. Date: April, 1997

SHEET No. 1 OF 1 SHEETS