






STRIPING LEGEND


- 

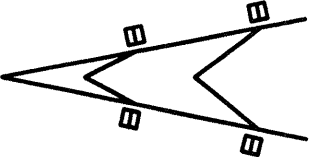
4 each Type A Raised Pavement Markers
Type C Raised Pavement Markers @ 40' - 0" o.c.
- 

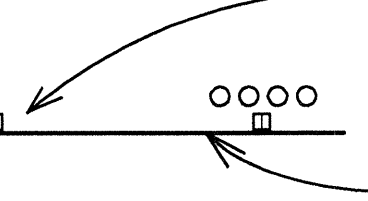
4" Double Solid Yellow Centerline Stripes with
Type D Raised Pavement Markers @ 20' - 0" o.c.
(Tape Type I or Thermoplastic Extrusion)
- 


4" Single Solid Yellow Transverse Median Stripes or
Transverse Shoulder Stripes with Type H Raised
Pavement Markers @ 20' - 0" o.c. (Tape, Type I or
Thermoplastic Extrusion)
- 


4" or 8" White Edge Stripe with Type C Raised
Pavement Markers @ 40' - 0" o.c.
(Tape Type II or Thermoplastic Extrusion)
- 


8" White Channelizing Stripe with Type C Raised
Pavement Markers @ 20' - 0" o.c. (Tape, Type I
or Thermoplastic Extrusion)
- 


Transverse Median Diagonal Marking 12" Wide
@ 20' - 0" o.c. (Tape, Type II or
Thermoplastic Extrusion)
- 

Channelizing Island or Deceleration Lane Gore
(Tape Type II or Thermoplastic Extrusion)
(Tape Type I or Thermoplastic Extrusion)
- 

4 Each Type A Raised Pavement Markers
10' wide (See Std. Plan TE-31)
Type C Raised Pavement Markers @ 20' - 0" o.c.
4" Single Solid White Stripe
(Tape, Type I or Thermoplastic Extrusion)
- 


4" White Guide Lines, 2' Stripe with 4' - 0" space
(Tape, Type III or Thermoplastic Extrusion)
- 


Pavement Arrow (Tape, Type III or Thermoplastic
Extrusion)
- 


Pavement Word (Tape, Type III or Thermoplastic
Extrusion)
- 


4" Double Solid Yellow Traverse Median Stripes
with Type H Raised Pavement Markers @
20' - 0" O.C. (Tape, Type II or Thermoplastic
Extrusion)

UTILITY LEGEND

- 

MON. Adjusted Monument
- 

mon. Existing Monument
- 

MON. New Monument
- 

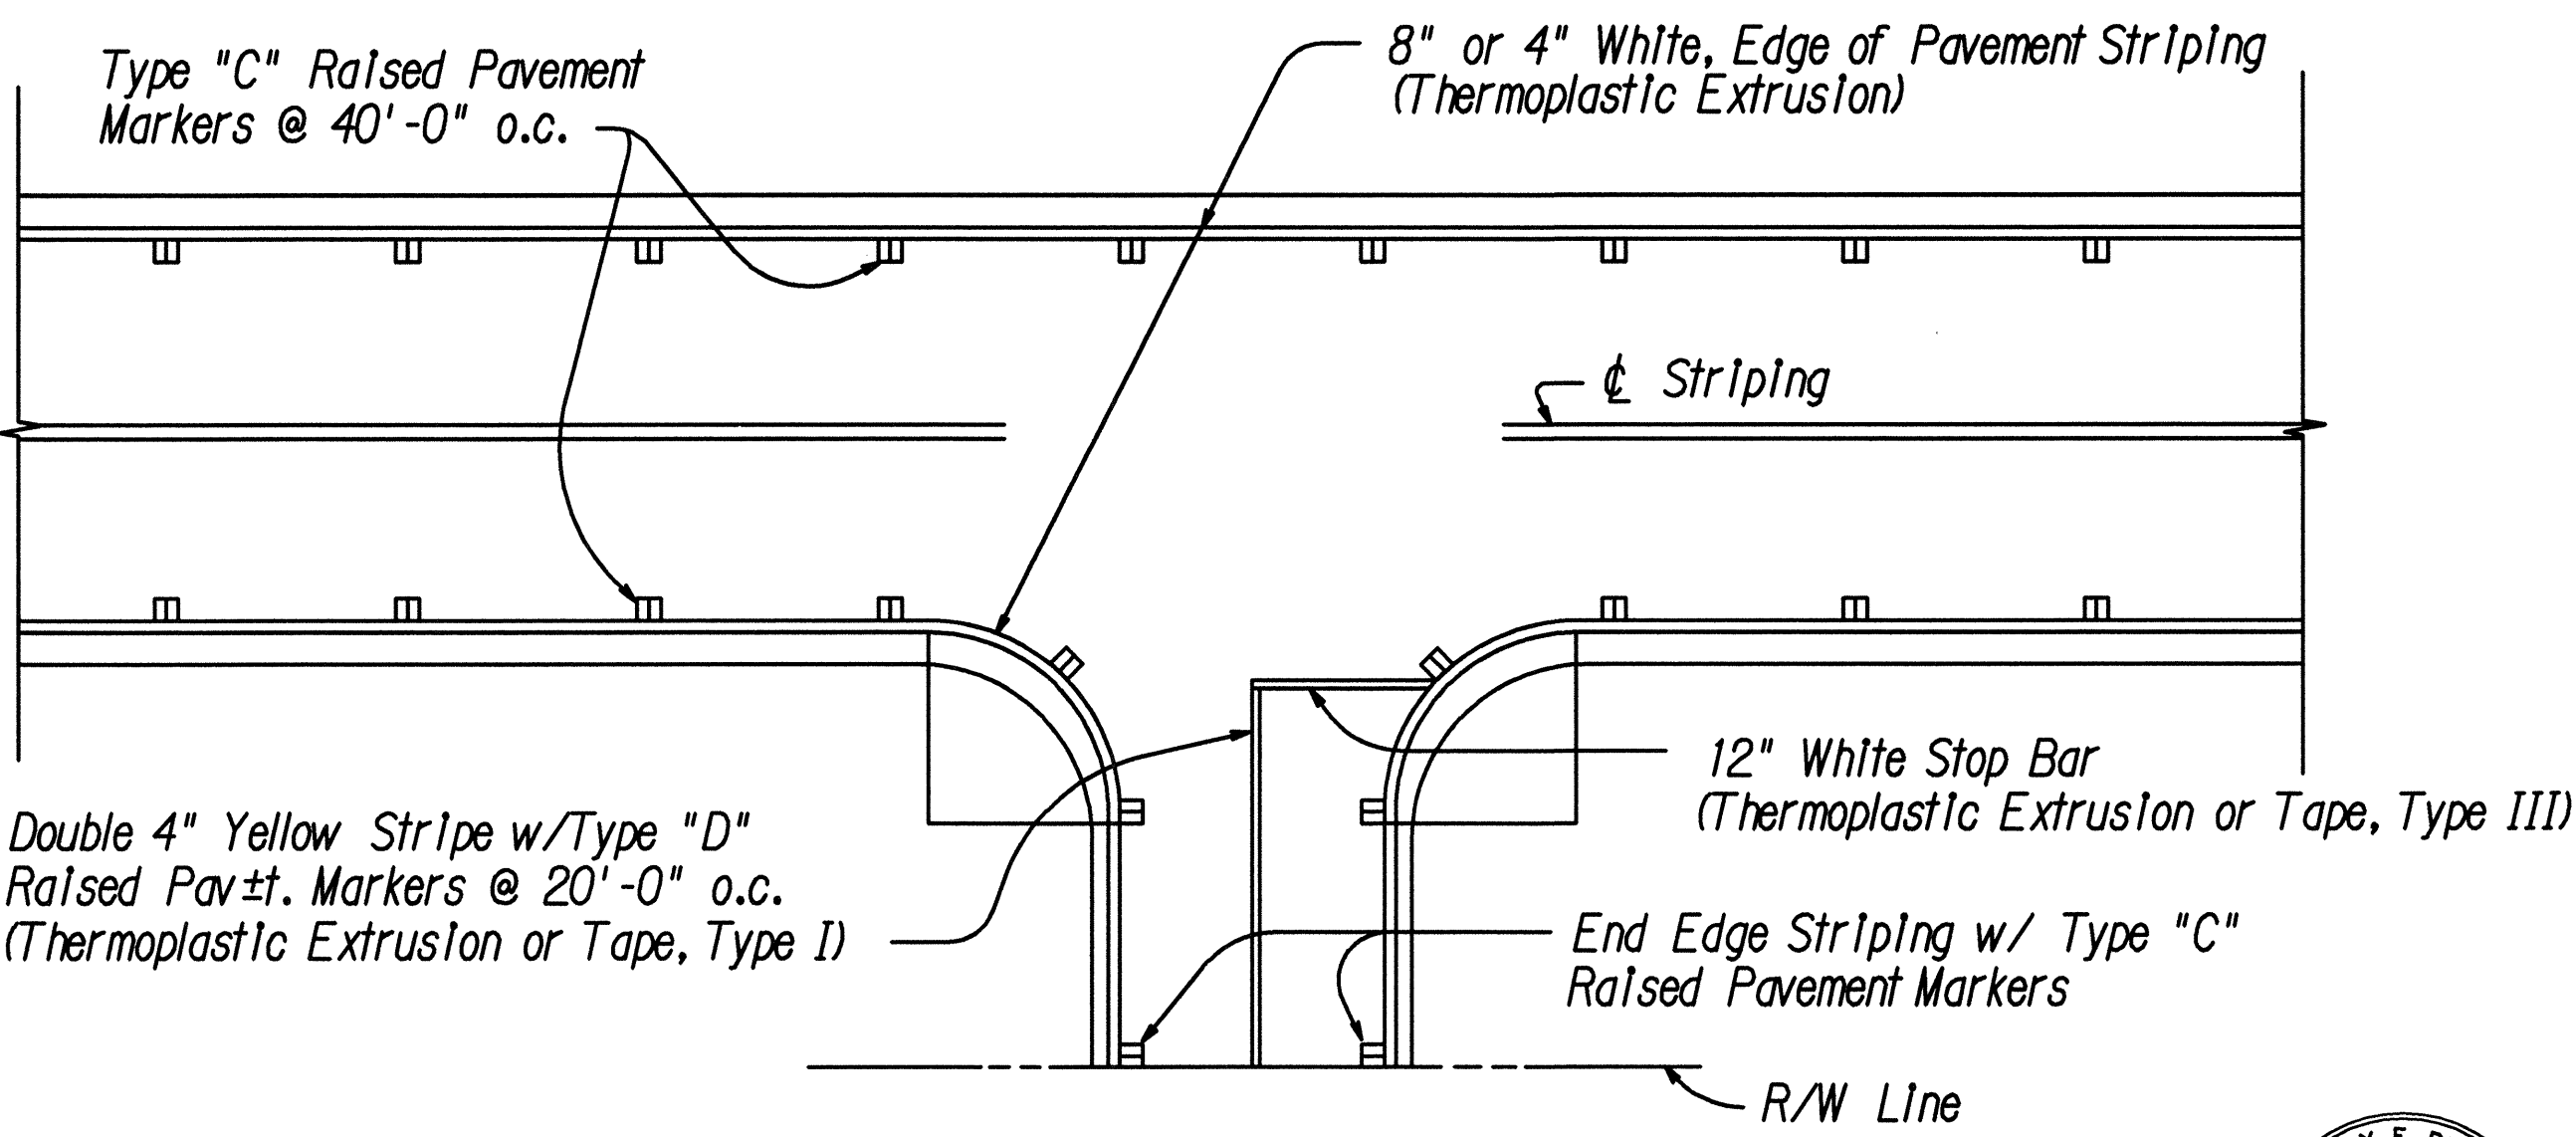
pp Power Poles

REFLECTOR MARKER LEGEND


- BI BI- directional Installation on same post.
- II- RM-2, White Reflector Marker, unless otherwise noted.
- III- RM-3, Yellow Reflector Marker, unless otherwise noted.
- II-II RM-2 BI, White Reflector Marker, unless otherwise noted.
- III-III RM-3 BI, Yellow Reflector Marker, unless otherwise noted.

NOTES

1. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any Installation work.
2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
3. Raised pavement markers shall not be installed within crosswalks.
4. Final locations of all Stop Lines shall be approved by the Engineer prior to Installation.
7. All pavement striping shall be as noted on the Legend or plans.
8. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
9. Contractor shall obtain blue raised pavement markers from County of Hawaii Fire Department and install them at the direction of the Engineer. The cost of installing the markers shall be incidental to other Contract items.



TYPICAL EDGE OF PAVEMENT MARKING



THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION AND CONSTRUCTION OF THIS PROJECT WILL BE UNDER MY OBSERVATION.
Nancy E. Burns
DATE: 8/24/98

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**PAVEMENT MARKINGS
LEGEND & NOTES**

KEA'AU-PAHOA ROAD VIC. OF KEA'AU
TOWN (KEA'AU BYPASS ROAD), PH. 2

PROJECT NO. 130B-01-98

Scale: NTS Date: August, 1998

SHEET No. 1 OF 1 SHEETS

SURVEY PLOTTED BY	DATE
DRAWN BY	
CHECKED BY	
NOTED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
DATE	