



FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	11E-01-02M	2002	19	37

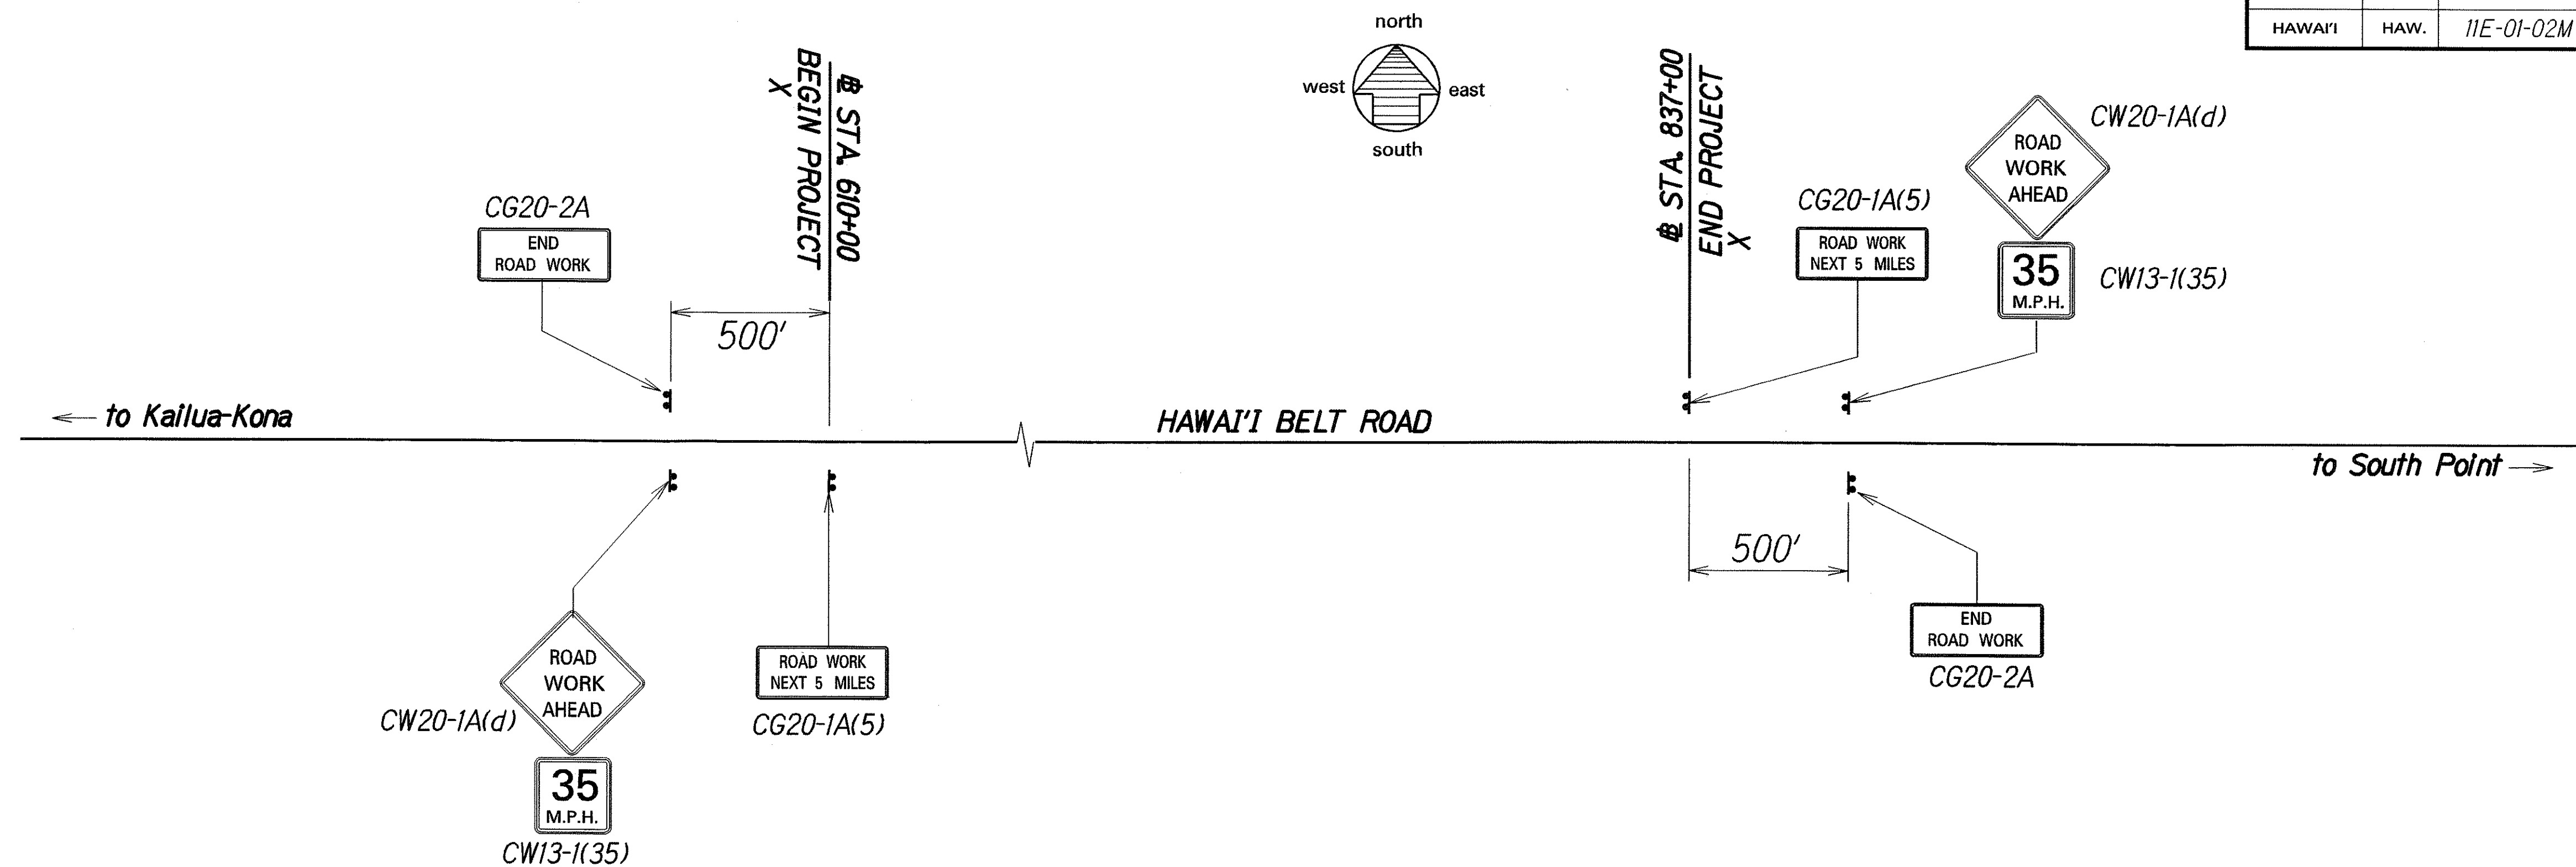


CONSTRUCTION SIGN PLAN
Not To Scale

CONSTRUCTION SIGN SCHEDULE					
ROAD AND LOCATION *	ROUTE 11 CENTERLINE STATION	LEFT	RIGHT	ITEM No. 621.7121 (no posts)	ITEM No. 621.7120 (two posts)
Hawai'i Belt Road	605+00		●		CW20-1A(d)
	605+00		●	CW13-1(35)	
	605+00	●			CG20-2A
	610+00		●		CG20-1A(5)
	837+00	●			CG20-1A(5)
	842+00	●			CW20-1A(d)
	842+00	●		CW13-1(35)	
	842+00		●		CG20-2A
Total Construction Signs				2	6


* - Final locations of all signs to be determined in the field by the Engineer.

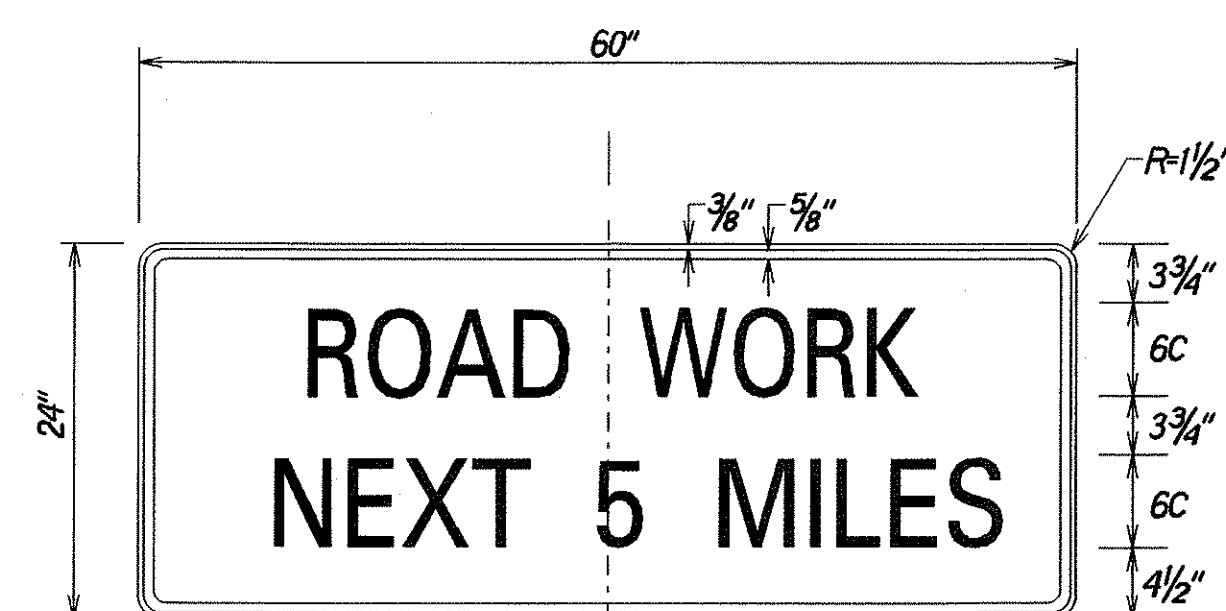

CG20-1A

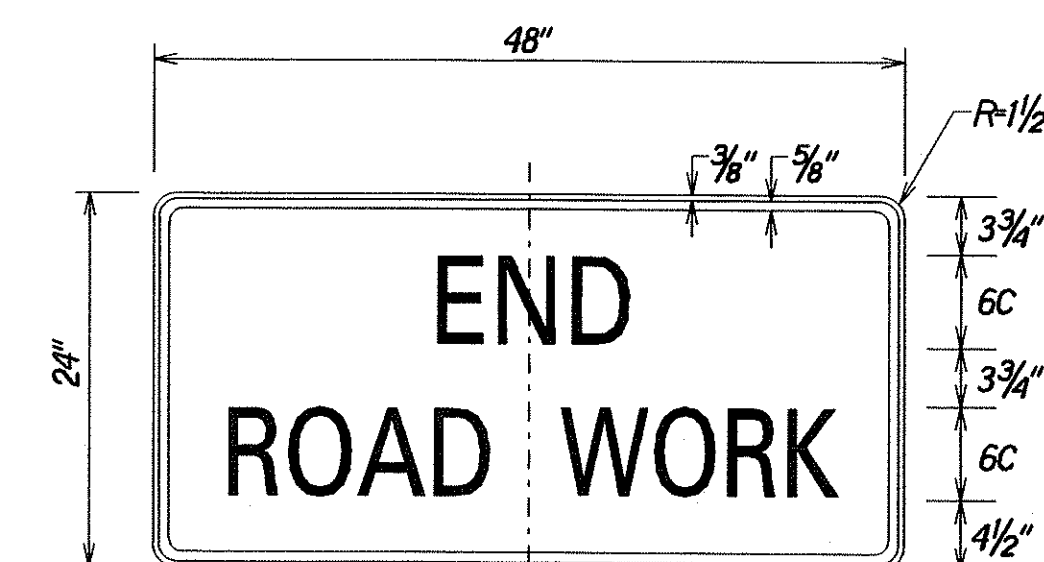

CG20-2A

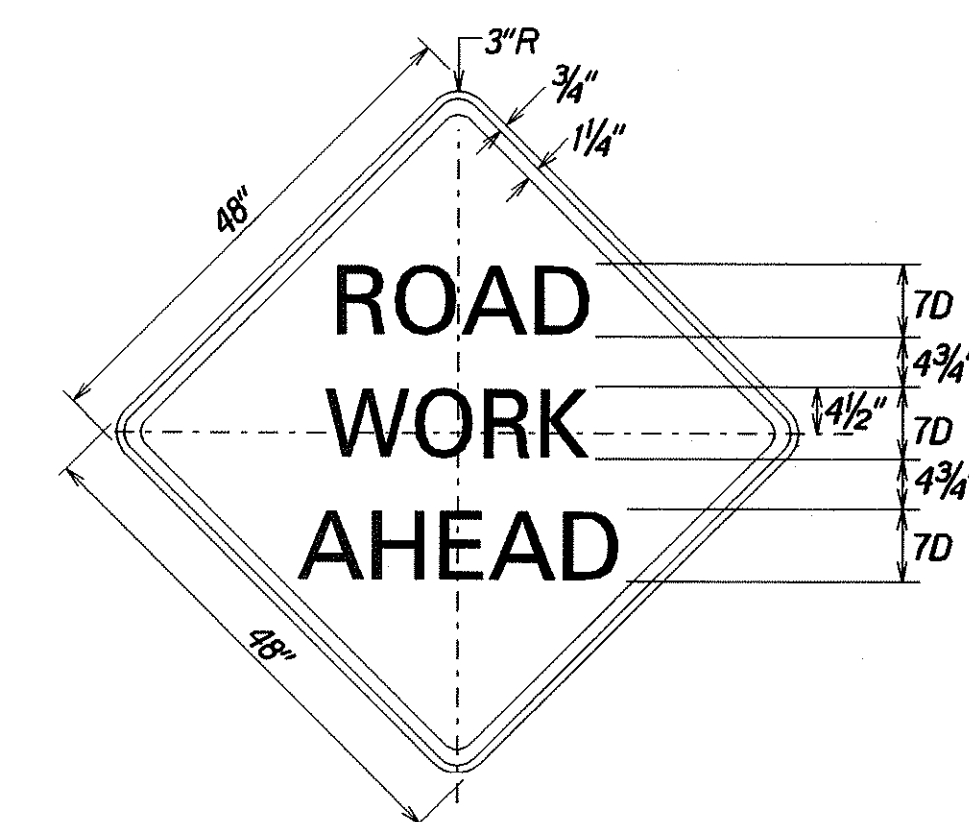

CW20-1A(d)

SIGN DETAILS
Not To Scale

ORIGINAL PLAN _____ SURVEY PLOTTED BY _____ DATE _____
 DRAWN BY X _____ * X _____
 TRACKED BY _____ * _____
 DESIGNED BY X _____ * _____
 QUANTITIES BY _____ * _____
 CHECKED BY _____ * _____

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

CONSTRUCTION SIGN PLAN

HAWAII BELT ROAD

GUARDRAIL AND SHOULDER IMPROVEMENTS

VICINITY OF KAHUKU

PROJECT NO. 11E-01-02M

Scale: none Date: April, 2002

SHEET No. 1 OF 1 SHEETS