


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	11M-02-02M	2002	8	58

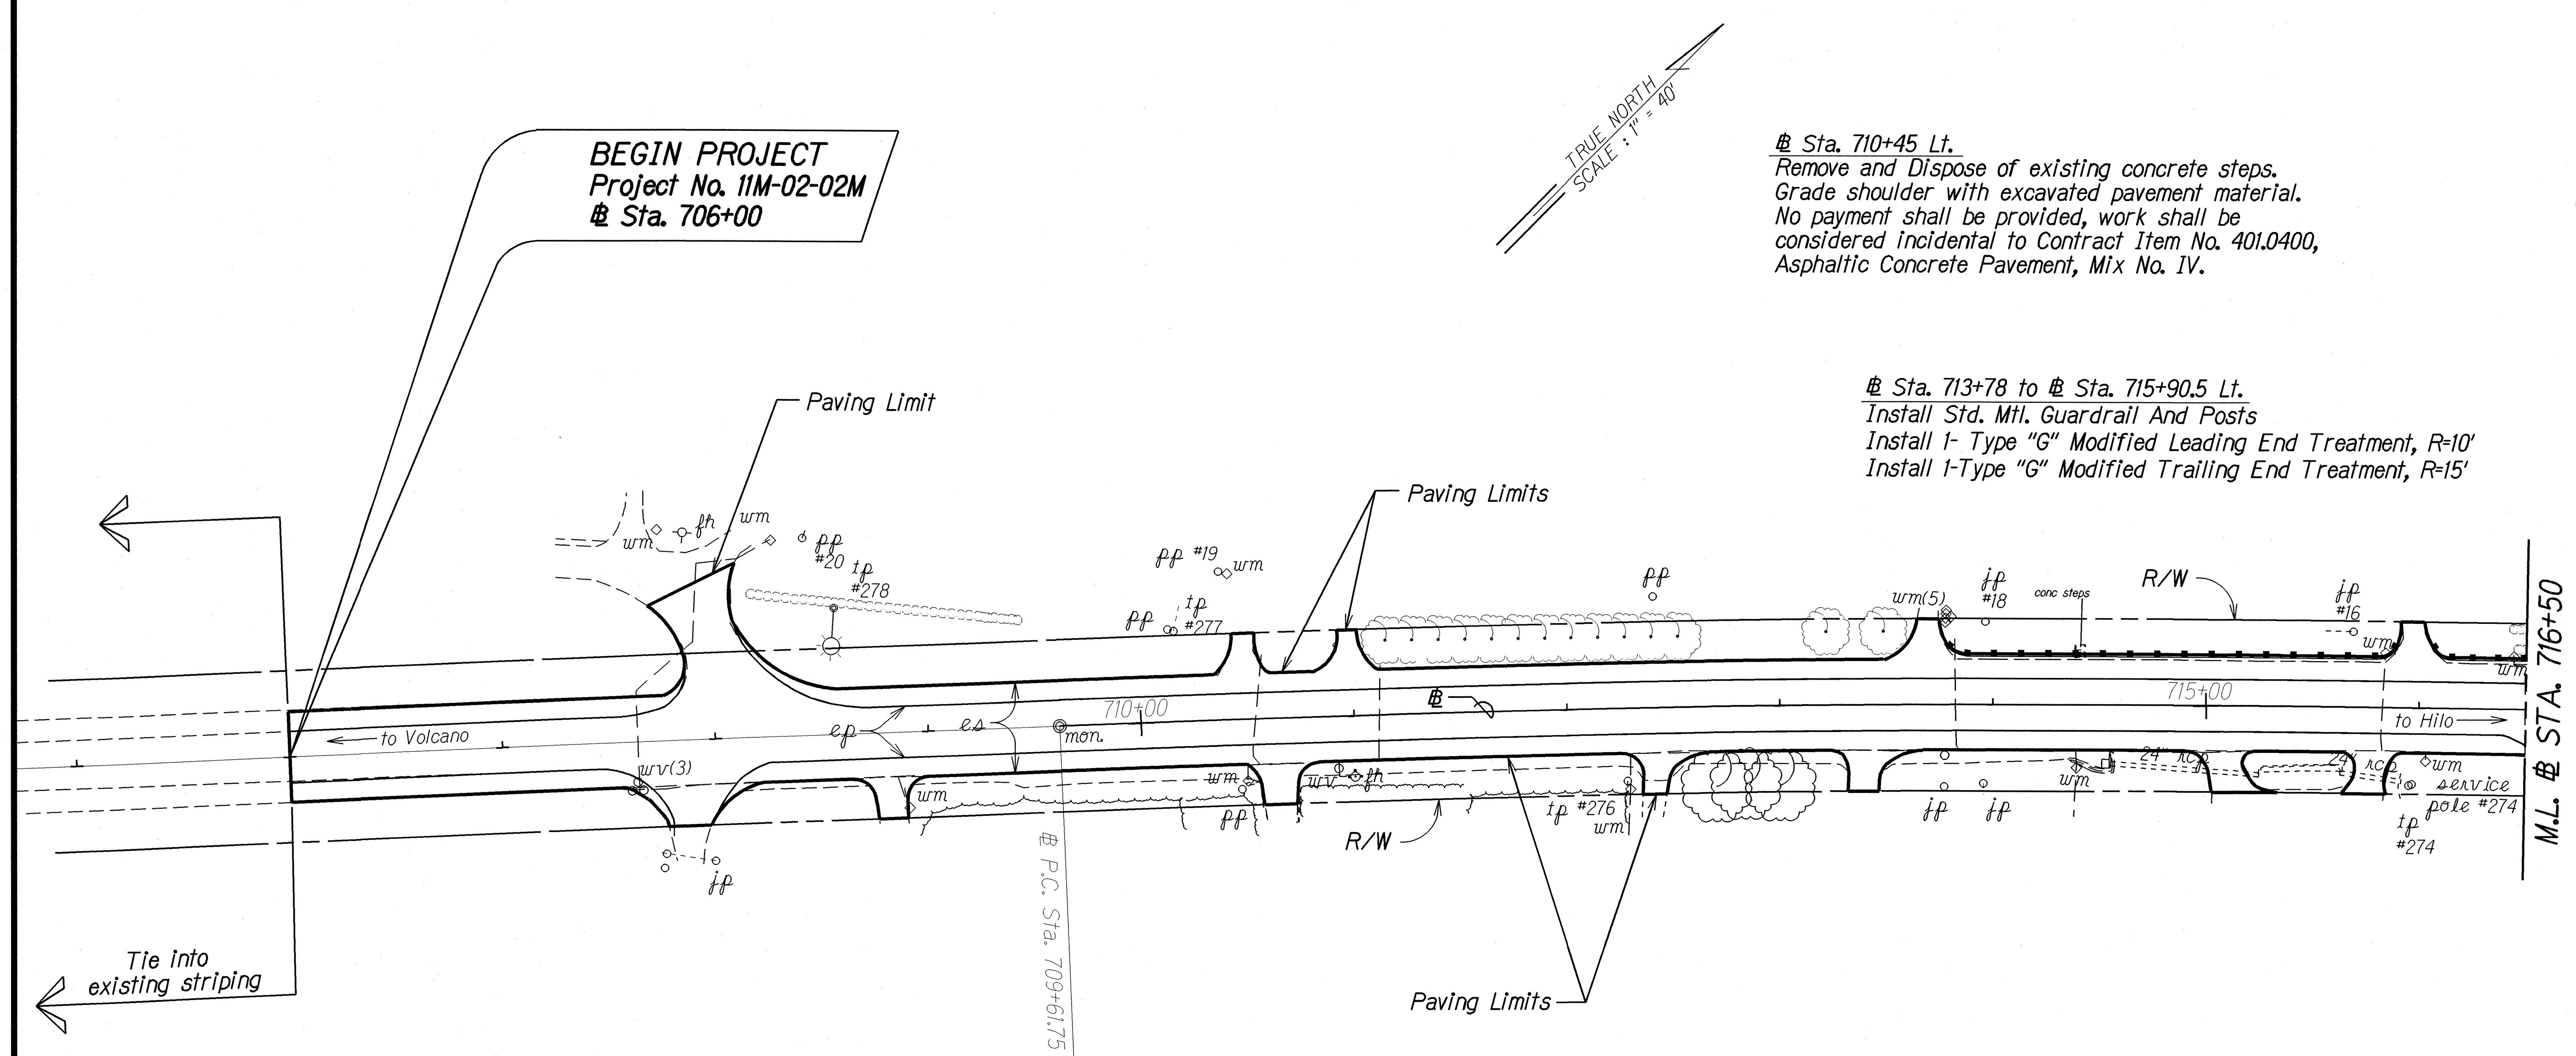

Sta. 710+45 Lt.
 Remove and Dispose of existing concrete steps.
 Grade shoulder with excavated pavement material.
 No payment shall be provided, work shall be considered incidental to Contract Item No. 401.0400, Asphaltic Concrete Pavement, Mix No. IV.

Sta. 713+78 to Sta. 715+90.5 Lt.
 Install Std. Mtl. Guardrail And Posts
 Install 1-Type "G" Modified Leading End Treatment, R=10'
 Install 1-Type "G" Modified Trailing End Treatment, R=15'

CURVE DATA
 $\Delta = 6^{\circ}14'30''$
 $D = 00^{\circ}30'00''$
 $R = 11,459.16'$
 $T = 624.79'$
 $L_c = 1,248.33'$
 $C = 1,247.72'$
 $S. E. = 0.04 \text{ ft/ft}$

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
CHECKED BY	
NOTE BOOK	
3/1/02	
N.S.	

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION

ROADWAY PLAN

VOLCANO ROAD RESURFACING
VICINITY OF MOUNTAIN VIEW SCHOOL
PROJECT NO. 11M-02-02M

Scale: 1" = 40' Date: April, 2002

SHEET No. 1 OF 2 SHEETS

