


GENERAL NOTES

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	BR-019-2(58)	2008	3	26

1. The scope of work for this project consists of retrofitting bent footings for seismic forces.
2. The Contractor's attention is directed to the following Sections of the Special Provisions: Subsection 107.13 - Public Convenience and Safety; Subsection 107.21 - Contractor's Responsibility For Utility Property And Services; and Section 645 -Traffic Control.
3. At the end of each day's work, the Contractor shall remove all equipment and other obstructions to permit free and safe passage of public traffic.
4. The existence and location of underground utilities, manholes, monuments and structures as shown on the plans are from the latest available data but the accuracy is not guaranteed. The encountering of other obstacles during the course of work is possible. The Contractor shall be held liable for any damages incurred to the existing facilities and/or improvements as a result of his operations.
5. Smooth riding connections shall be constructed at all limits of resurfacing, including the beginning and end of project, connecting approaches, side streets and driveways as shown on the plans and/or as directed by the Engineer.
6. Dressing of shoulder, sidewalk and bus turnout shall consist of clearing, grubbing, grading, reshaping and compacting the unpaved shoulders with suitable material as shown on the plans and/or as directed by the Engineer. This work shall be considered incidental to the various contract items.
7. Existing drainage system will be functional at all times during construction. The Contractor is to furnish materials, equipment, labor, tools and incidentals necessary to maintain flow. This work shall be considered incidental to various contract items.
8. Earth swale shall be graded to drain. This work shall be considered incidental to the various contract items.
9. The Contractor shall provide for access to and from all existing side streets at all times.
10. All saw cutting work shall be considered incidental to Excavation for Reconstruction of Weakened Pavement Areas.
11. The Contractor at his own expense, shall keep the project area and surrounding area from dust nuisance. The work shall be in conformance with the Air Pollution Control Standards and Regulations of the State Department of Health.
12. The Contractor shall be solely responsible for the protection of adjacent properties, utilities, and existing structures from damage due to construction. Repairing any damage shall be at the Contractor's own expense and to the satisfaction of the Engineer.
13. Removal and disposal of any debris shall be considered incidental to their respective bid items. This work shall be considered incidental to the various contract items and will not be paid for separately.
14. The Contractor will immediately report to the Engineer and utility companies damage discovered or caused by his work to any utilities.

15. All work specified in the contract, but not listed separately in the proposal schedule shall be considered incidental to other various contract items and shall not be paid for separately.
16. No material and/or equipment shall be stockpiled or otherwise stored within the highway right-of-way except at locations designated in writing and approved by the Engineer. If use of location is approved by the Engineer, the Contractor shall obtain a permit to use the property within the highway right-of-way from the State Right-of-Way Branch at telephone no. 692-7332.
17. The Contractor is reminded of the requirements of Subsection 105.16 - Subcontracts, which requires the Contractor to perform work amounting to not less than 30 percent of the total contract cost less deductible items. Noncompliance with this Subsection may be grounds for rejection of bid.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
No.	TRACED BY	
	DESIGNED BY	
	QUANTITIES BY	
	CHECKED BY	

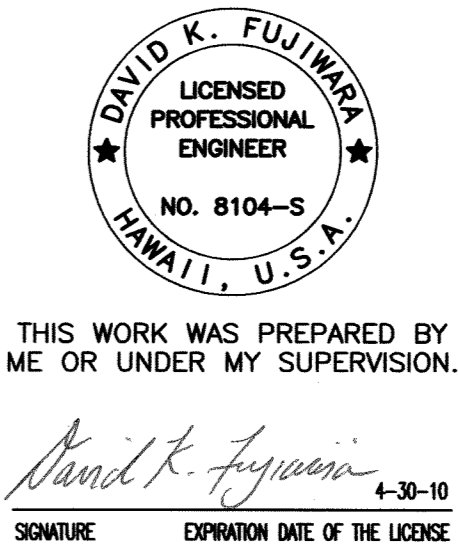

STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION	
<u>GENERAL NOTES</u>	
<u>HAWAII BELT ROAD</u>	
<u>SEISMIC RETROFIT OF VARIOUS BRIDGES</u>	
<u>Vicinity Of Papaikou, Phase 2</u>	
<u>Federal-aid Project No. Br-019-2(58)</u>	
<u>Scale: NONE</u>	<u>Date: Mar. 2007</u>
SHEET No. T1.3 OF 5 SHEETS	