

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	RS-STP-0270(11)	1994	12	30

LEGEND (Ainakea Dr. Intersection)


- 8" White Stripe with Type C Raised Pavement Markers @ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
- 4" Double Solid Yellow with Type D Raised Pavement Markers @ 20'- 0" o.c. (Tape, Type I or Thermoplastic Extrusion)
- 4" Double Solid Yellow Stripes with Type H Raised Pavement Markers @ 20'- 0" o.c. (Tape, Type I or Thermoplastic Extrusion)
- 4" Double Solid White Stripes with Type C Raised Pavement Markers @ 20'- 0" o.c. (Tape, Type I or Thermoplastic Extrusion)
- Lane Change Restriction Marking
4 each Type A Raised Pavement Markers
Type C Raised Pavement Markers @ 20'- 0" o.c.
4" White Stripe (Tape, Type I or Thermoplastic Extrusion)
- 4" or 8" White Edge Stripe with Type C Raised Pavement Markers @ 40'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
- 4" White Guide Lines (Tape, Type III or Thermoplastic Extrusion)
- Transverse Median Marking (Tape, Type II or Thermoplastic Extrusion)
- Channelizing Island or Deceleration Lane Gore (Tape, Type II or Thermoplastic Extrusion)
- Pavement Arrow (Tape, Type I or Thermoplastic Extrusion)

NOTES



- Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
- Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
- Raised pavement markers shall not be installed within crosswalks.
- Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
- All pavement striping shall be as noted on the Legend, in the Special Provisions, or plans.
- All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
- Contractor shall obtain blue raised pavement markers from County of Hawaii Fire Department and install them at the direction of the Engineer. The cost of installing the markers shall be incidental to other contract items.
- The Contractor shall remove and dispose of all existing raised pavement markers prior to the overlaying of Asphalt Concrete. This work shall be considered incidental to Item No. 401.0400, Asphalt Concrete Pavement, Mix No. IV.

LEGEND (Roadway Striping and Sign Plan and Hawi Town)

- 4" Double Solid Yellow with Type D Raised Pavement Markers @ 20'- 0" o.c. (Thermoplastic Extrusion or Tape, Type I)
- 4" or 8" White Edge Stripe with Type C Raised Pavement Markers @ 40'-0" o.c. (Thermoplastic Extrusion or Tape, Type II)
- 4 each Type J Raised Pavement Markers and Type D Raised Pavement Markers @ 40'- 0" o.c.
- Lane Change Restriction Marking :
4 each Type J Raised Pavement Markers and alternating Type D and Type H Raised Pavement Markers @ 20'- 0" o.c.
- 4" Yellow Stripe (Thermoplastic Extrusion or Tape, Type I)
- Crosswalk and Stop Line. All stop lines (when used on plans) shall be 6'-0" from crosswalk, unless otherwise noted. (Thermoplastic Extrusion or Tape, Type III)

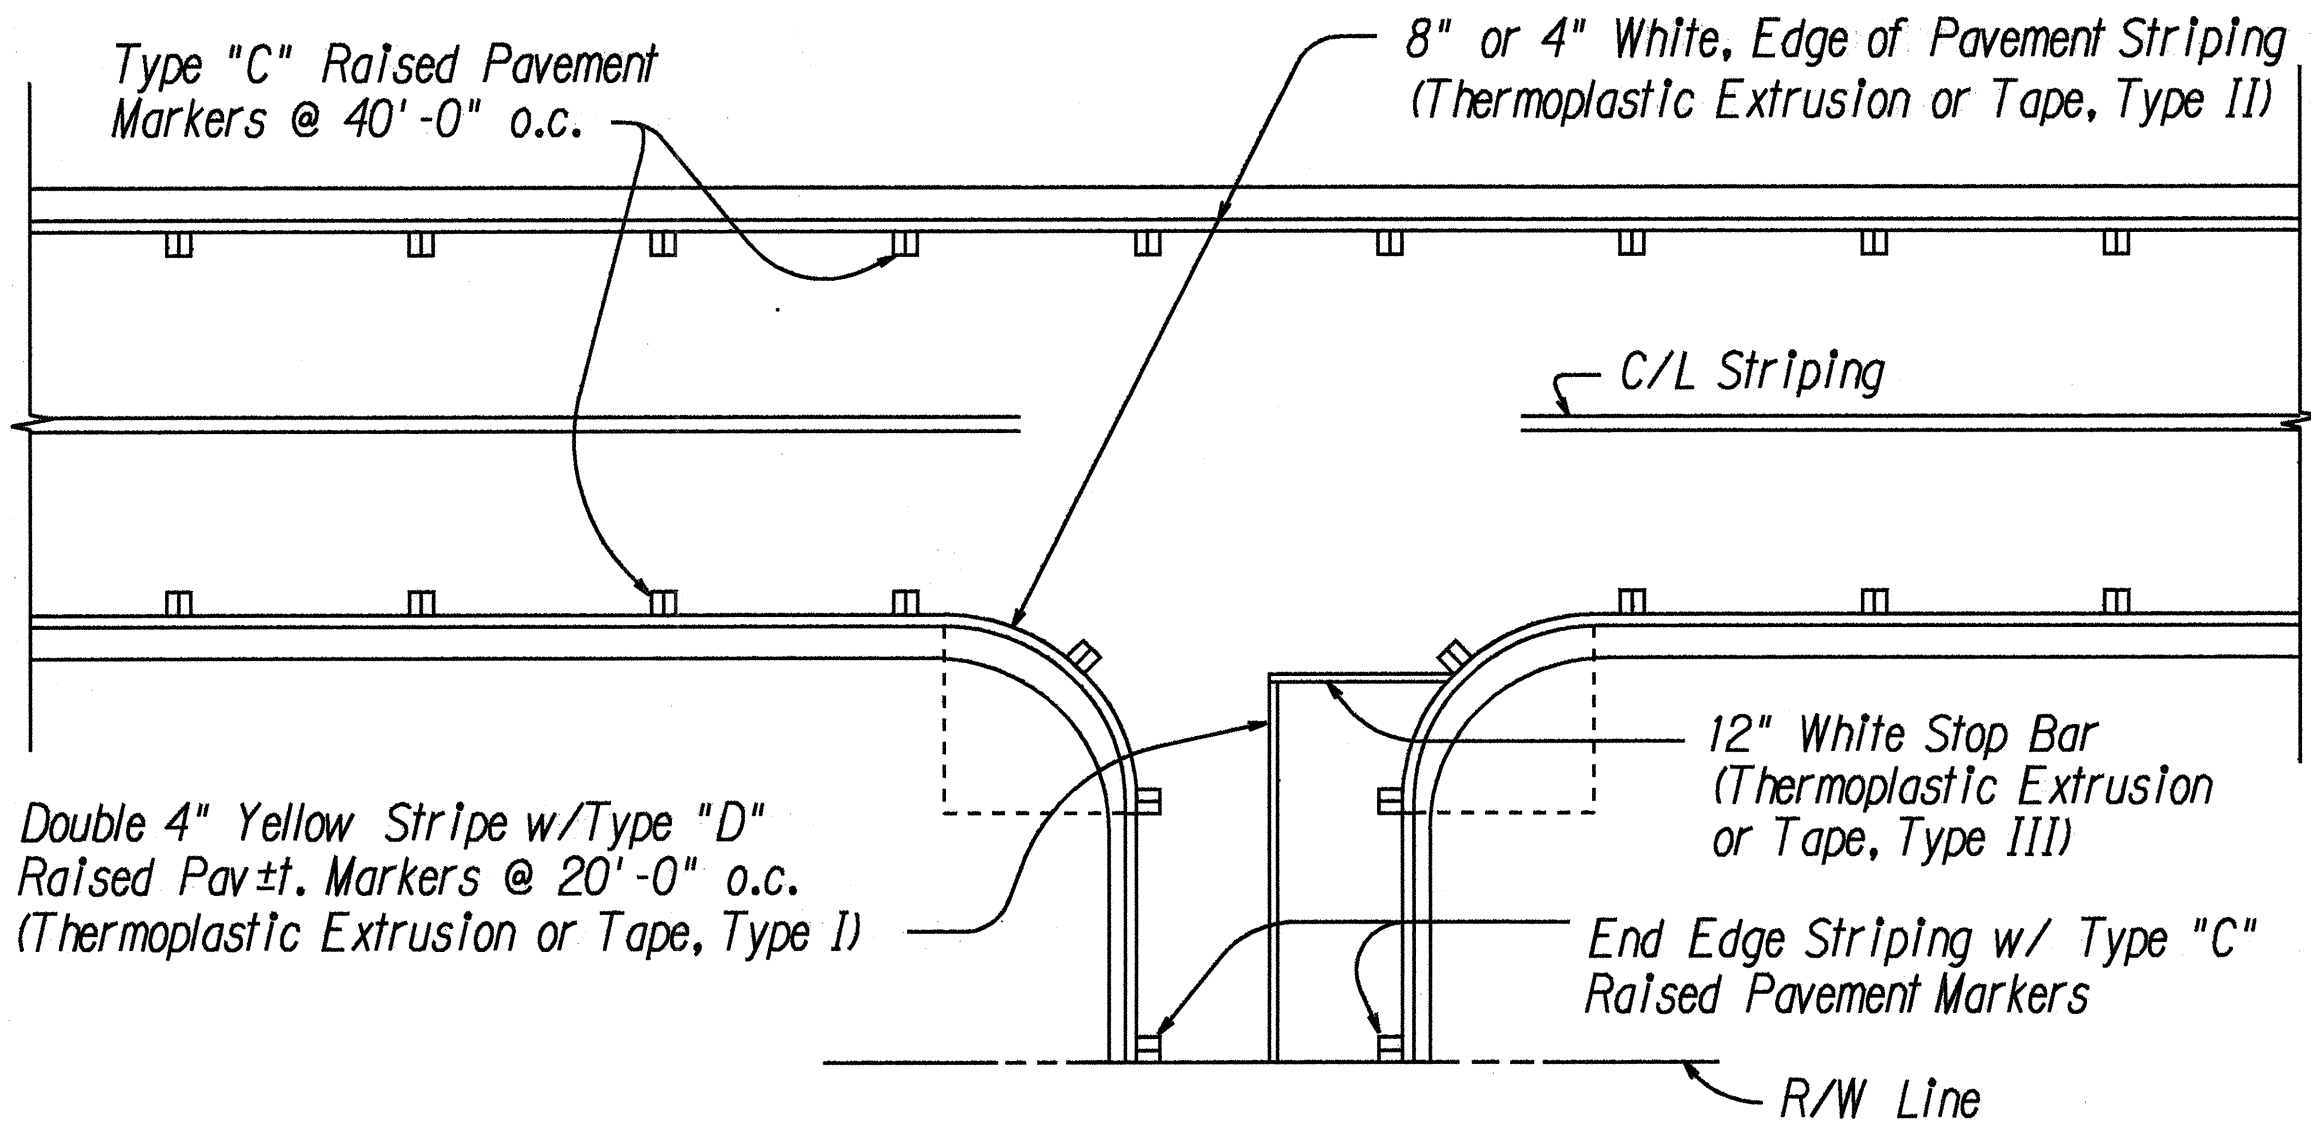

TYPICAL EDGE OF PAVEMENT MARKING
Not to Scale

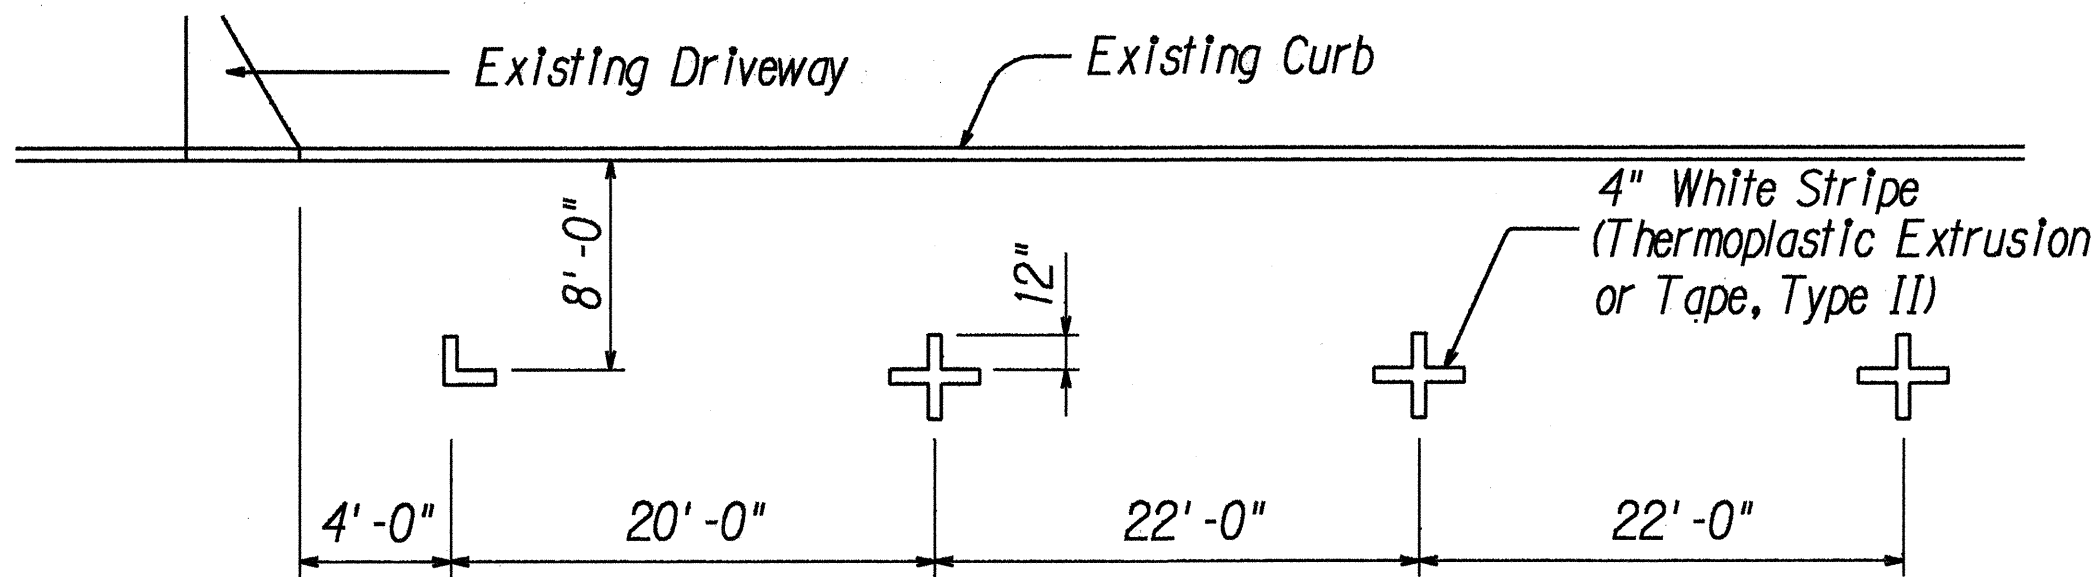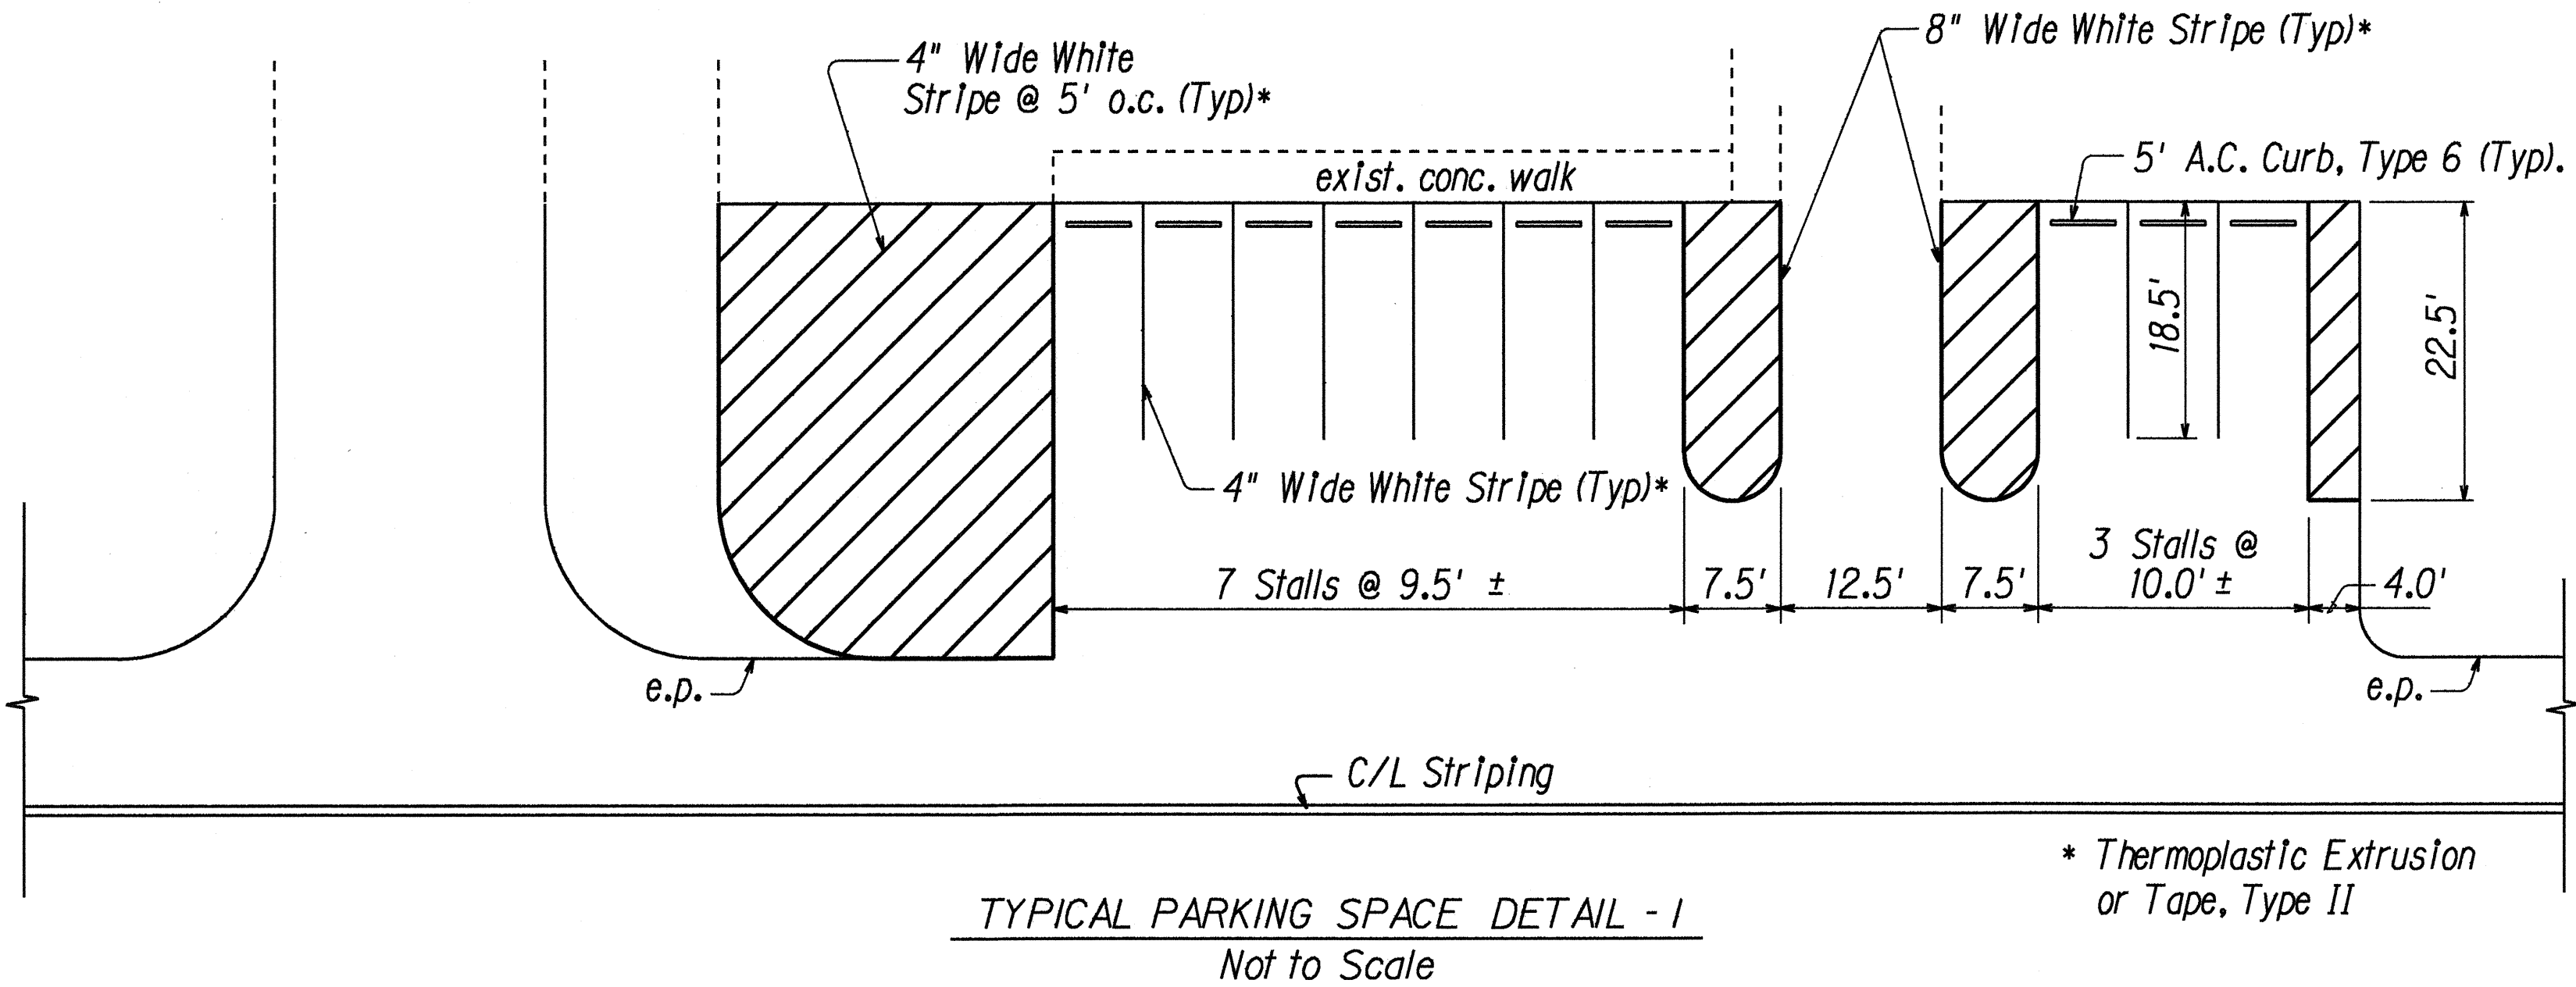

STATE OF HAWAII

DEPARTMENT OF TRANSPORTATION

HIGHWAYS DIVISION

PAVEMENT MARKING

LEGEND, DETAILS & NOTES

AKONI PULE HIGHWAY RESURFACING

KOKOIKE TO AINAKEA SUBDIVISION

F.A. PROJECT NO. RS-STP-0270(11)

Scale: As Shown

Date: August, 1994

SHEET No. 1 OF 1 SHEETS