

NOTES:

1. MATCH HOLE PATTERN TO EXISTING LIGHT BASE. PATTERN SHOWN IS FOR SIZE B, 12" LIGHT BASE.

5. IN LIEU OF REUSING SALVAGED EDGE LIGHTS, BATTERY POWERED PORTABLE EDGE LIGHTS

6. USE OF TEMPORARY EDGE LIGHTS THAT RESULTS IN A MIX OF INCANDESCENT AND LED


MEETING AC 150/5345-50B MAY BE USED IF APPROVED BY THE ENGINEER.

FIXTURES ILLUMINATING THE RUNWAY EDGE, IS NOT ACCEPTABLE.

- 2. OUTSIDE DIMENSION SHALL MATCH EXISTING BASE.
- 10 DEGREE OPENING SHALL BE INCREASED AS REQUIRED FOR ADDITIONAL CABLES. KEEP OPENING SMALL TO MINIMIZE FOREIGN OBJECT ENTRY INTO LIGHT BASE. SEAL CABLE OPENING WITH DUCT SEAL AFTER TEMPORARY CABLE IS INSTALLED.






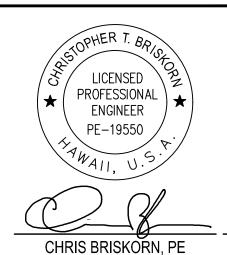

ELECTRICAL ENGINEER DSGN. DRWN. CHKD. APPD.

KEY PLAN / NOTES:

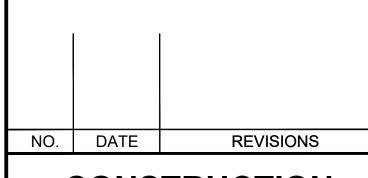

CONSTRUCTION **DOCUMENTS**

JULY 2022

PROJECT TITLE:

RELOCATE **RUNWAY 3-21**

AT LIHUE AIRPORT LIHUE, KAUAI, HAWAII PROJECT NO.:

AK1031-14

SHEET TITLE:

TEMPORARY EDGE LIGHTING DETAILS

DATE: 07/2022

E3.06

DWG. NO. SHEET: 350 OF 376 SHEETS