



FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19G-01-88M	1988	4	10

TRUE NORTH
SC: 1"=100'

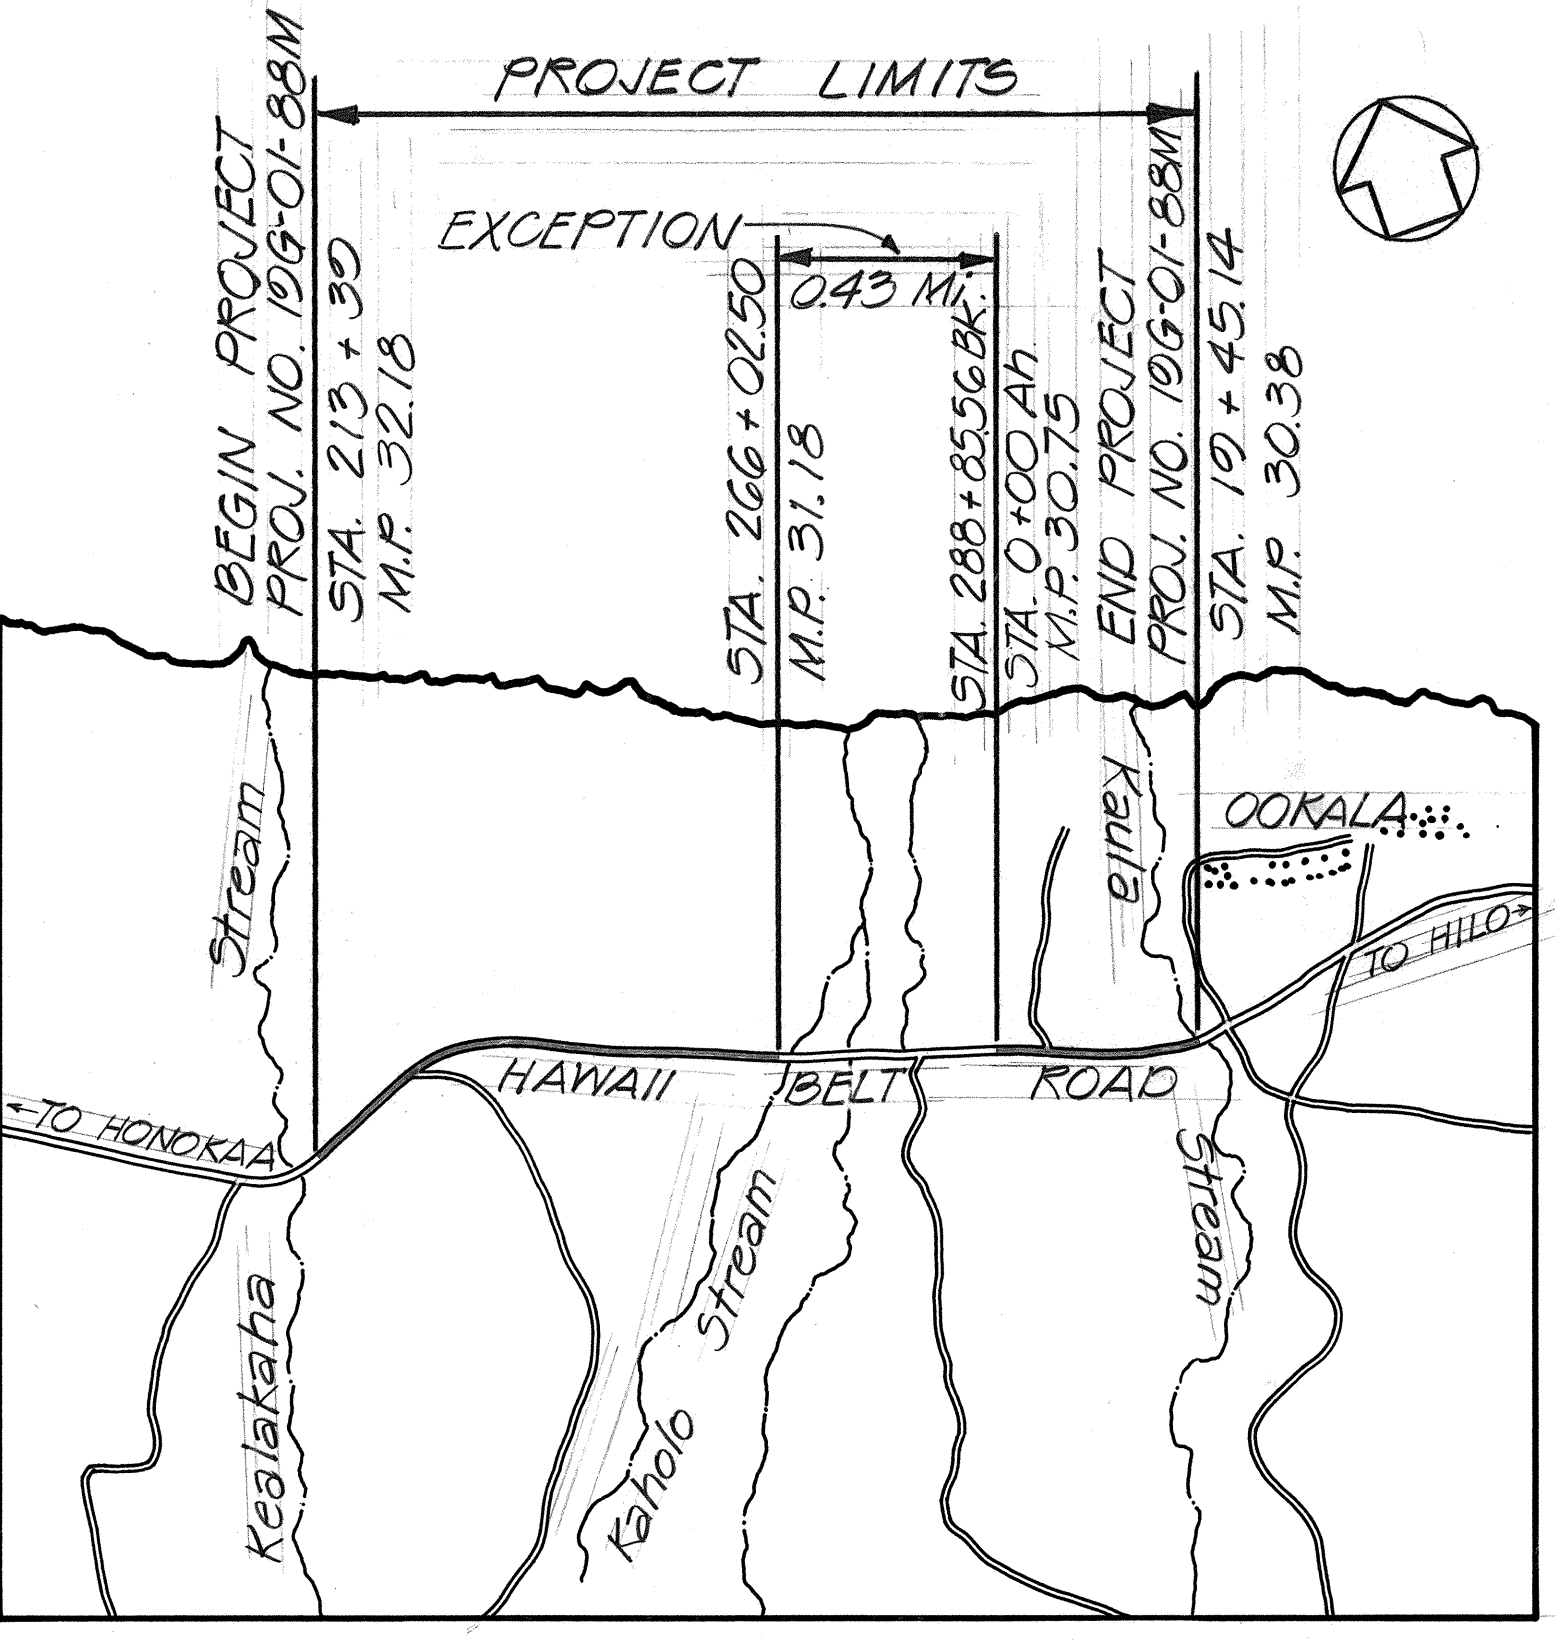

GENERAL LOCATION PLAN
Scale: 1" = 2000'

- NOTE**
1. Striping to be done by state forces.
 2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the engineer. Costs shall be incidental to the various pavement marking items.
 3. For bridge striping detail see 'Standard Plan TE-67.'

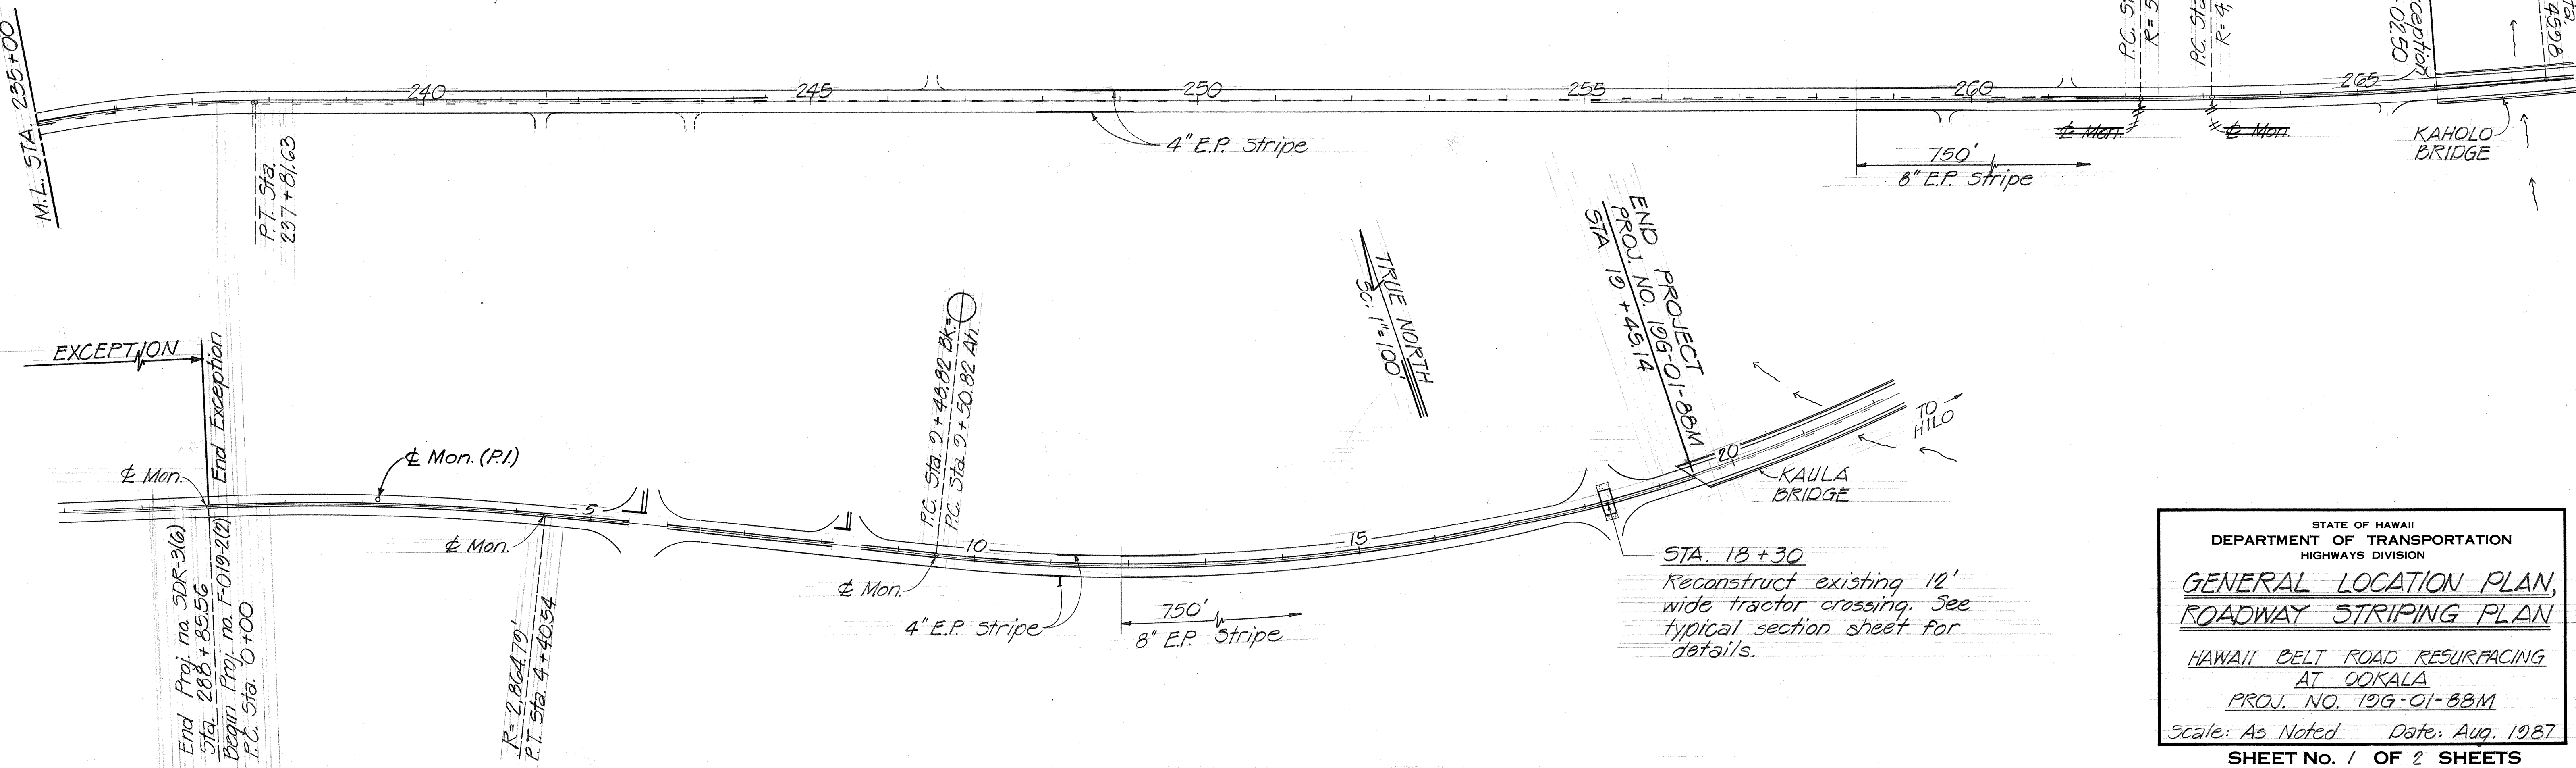

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**GENERAL LOCATION PLAN,
ROADWAY STRIPING PLAN**

HAWAII BELT ROAD RESURFACING
AT OOKALA
PROJ. NO. 19G-01-88M

Scale: As Noted Date: Aug. 1987

SHEET NO. 1 OF 2 SHEETS

ORIGINAL PLAN	DATE
DRAWN BY	
TRACED BY	
DESIGNED BY	
CHECKED BY	
NO.	

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19G-01-88M	1988	5	10

PAVEMENT MARKER SCHEDULE *						
PROJ. NO.	STATION		DESCRIPTION	TYPE		
	FROM	TO		DL	HL	J
SDR-3(6)	213 +39	220 +50	No Passing L - Passing R	19	18	72
	220 +50	222 +00	No Passing - Both Sides	8		
	222 +00	229 +50	Passing L - No Passing R	19	18	72
	229 +50	235 +20	No Passing - Both Sides	19		
	235 +20	242 +50	No Passing L - Passing R	23	23	72
	242 +50	255 + 20	Passing - Both Sides	32	27	104
	255 + 20	261 + 20	Passing L - No Passing R	14	17	68
	261 + 20	266 +02.5	No Passing - Both Sides	24	22	
	266 +02.5	288 +85.56	Exception			
F-019-2(2)	0 +00	5 + 40 ⁵⁰	No Passing - Both Sides	28		
	5 + 40 ⁵⁰	6 +00	Open			
	6 +00	8 + 50 ¹⁰	No Passing - Both Sides	11		
	8 + 50 ¹⁰	8 +50	Open			
	8 +50	19 +45	No Passing - Both Sides	56		
TOTALS				259	76	408

* - See 'Standard' Plan TE-30' for raised pavement marker details.

E AND REFERENCE SURVEY MONUMENT SCHEDULE **	
PROJ. NO.	STATION
SDR-3(6)	P.T. Sta. 214 + 49.06
	P.C. Sta. 226 + 80.06 PK
	P.T. Sta. 237 + 81.81 AH
	P.C. Sta. 262 + 20.14
	P.T. Sta. 263 + 09.51
F-019-2(2)	Sta. 288 + 85.56 0 + 00
	P.C. Sta. 4 + 40.54
	P.E.T. Sta. 2 + 48.82 PK 0 + 50.82 AH
	P.I. No.1 Sta. 2 + 20 ± Lt.
TOTAL	5 8 - Each

** - See 'Standard Plan D-06' for details

CONSTRUCTION SIGN SCHEDULE ***	
STATION	Item no. 621.7120 'Construction Sign with two Posts'
208 + 40L	CG20-2 (60"x 24")
208 219 + 40R	CG20-1(2) (60"x 36")
10 + 40 ⁰⁰ L	CG20-1(2) (60"x 36")
24 + 40R	CG20-2 (60"x 24")
TOTAL	4 - Each

*** - See 'Standard' Plans TE-01, TE-02, TE-03 and TE-08' for details

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
	DESIGNED BY	
	NOTED BY	
	CHECKED BY	
NOTE BOOK	QUANTITIES BY	
	CHECKED BY	
No.		

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

MISC. SCHEDULES

HAWAII BELT ROAD RESURFACING
AT OOKALA
PROJ. NO. 19G-01-88M

Date: Aug. 1987

SHEET No. 2 OF 2 SHEETS