




FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19J-01-88M	1988	6	10

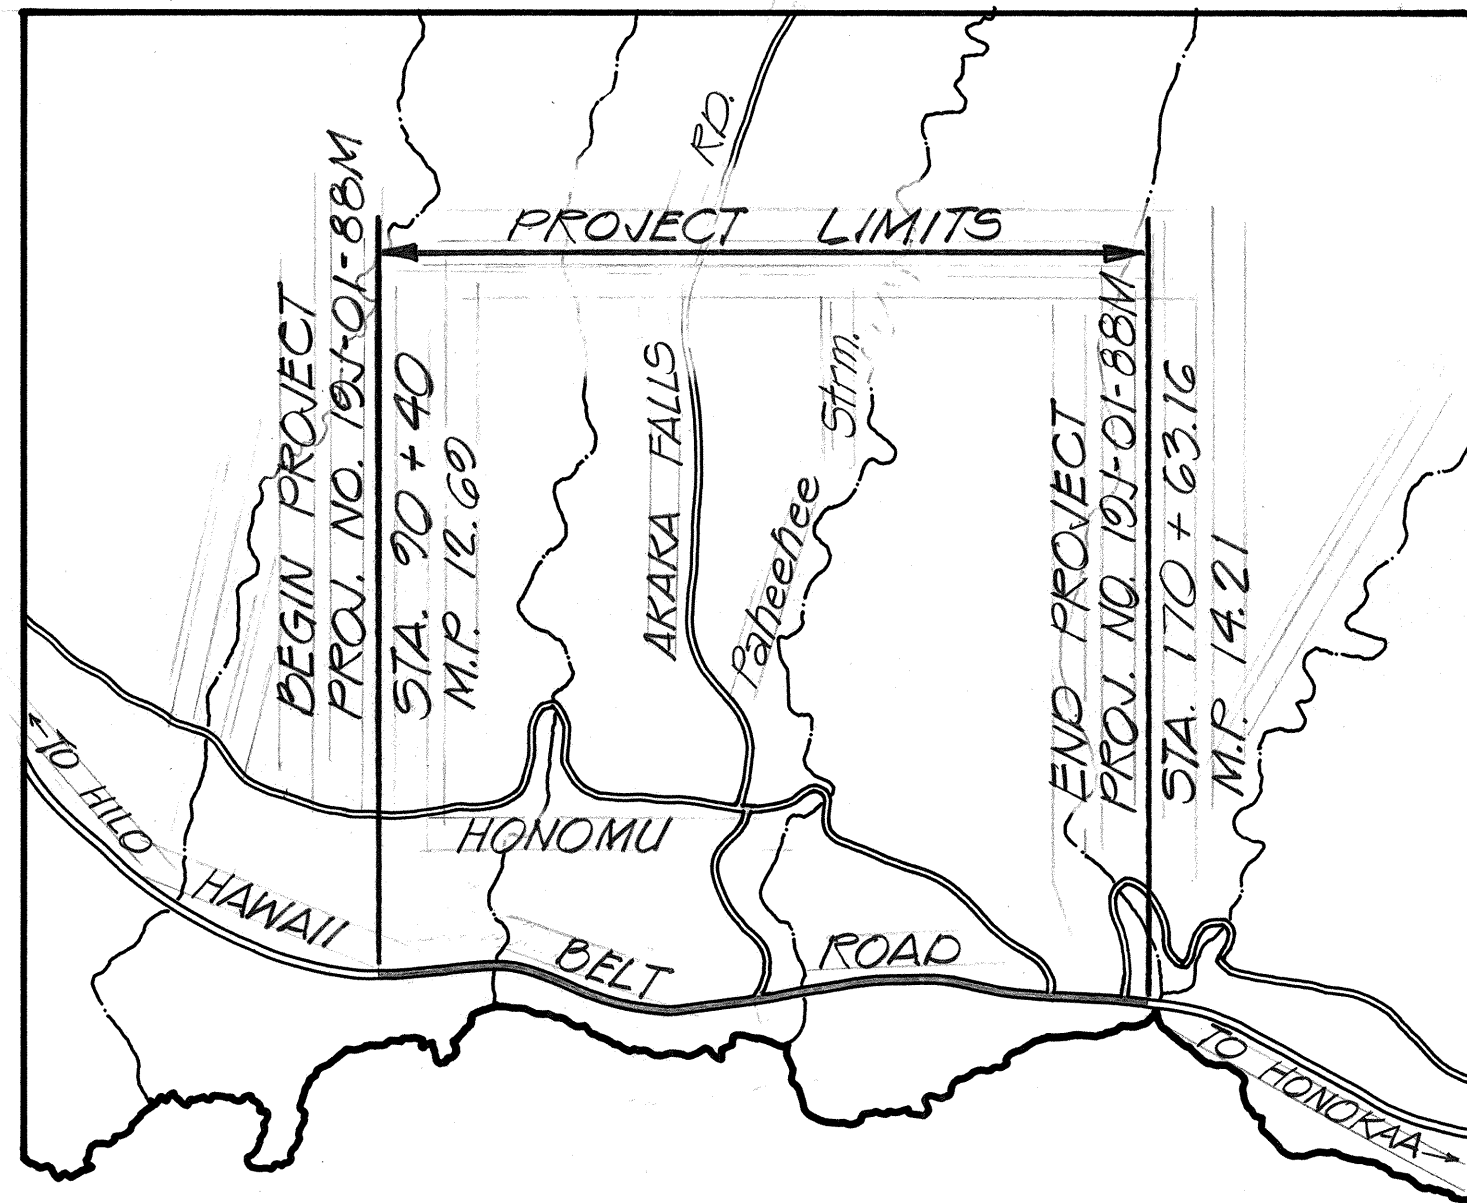

GENERAL LOCATION PLAN
Scale: 1" = 2000'



TRUE NORTH
Scale: 1" = 100'

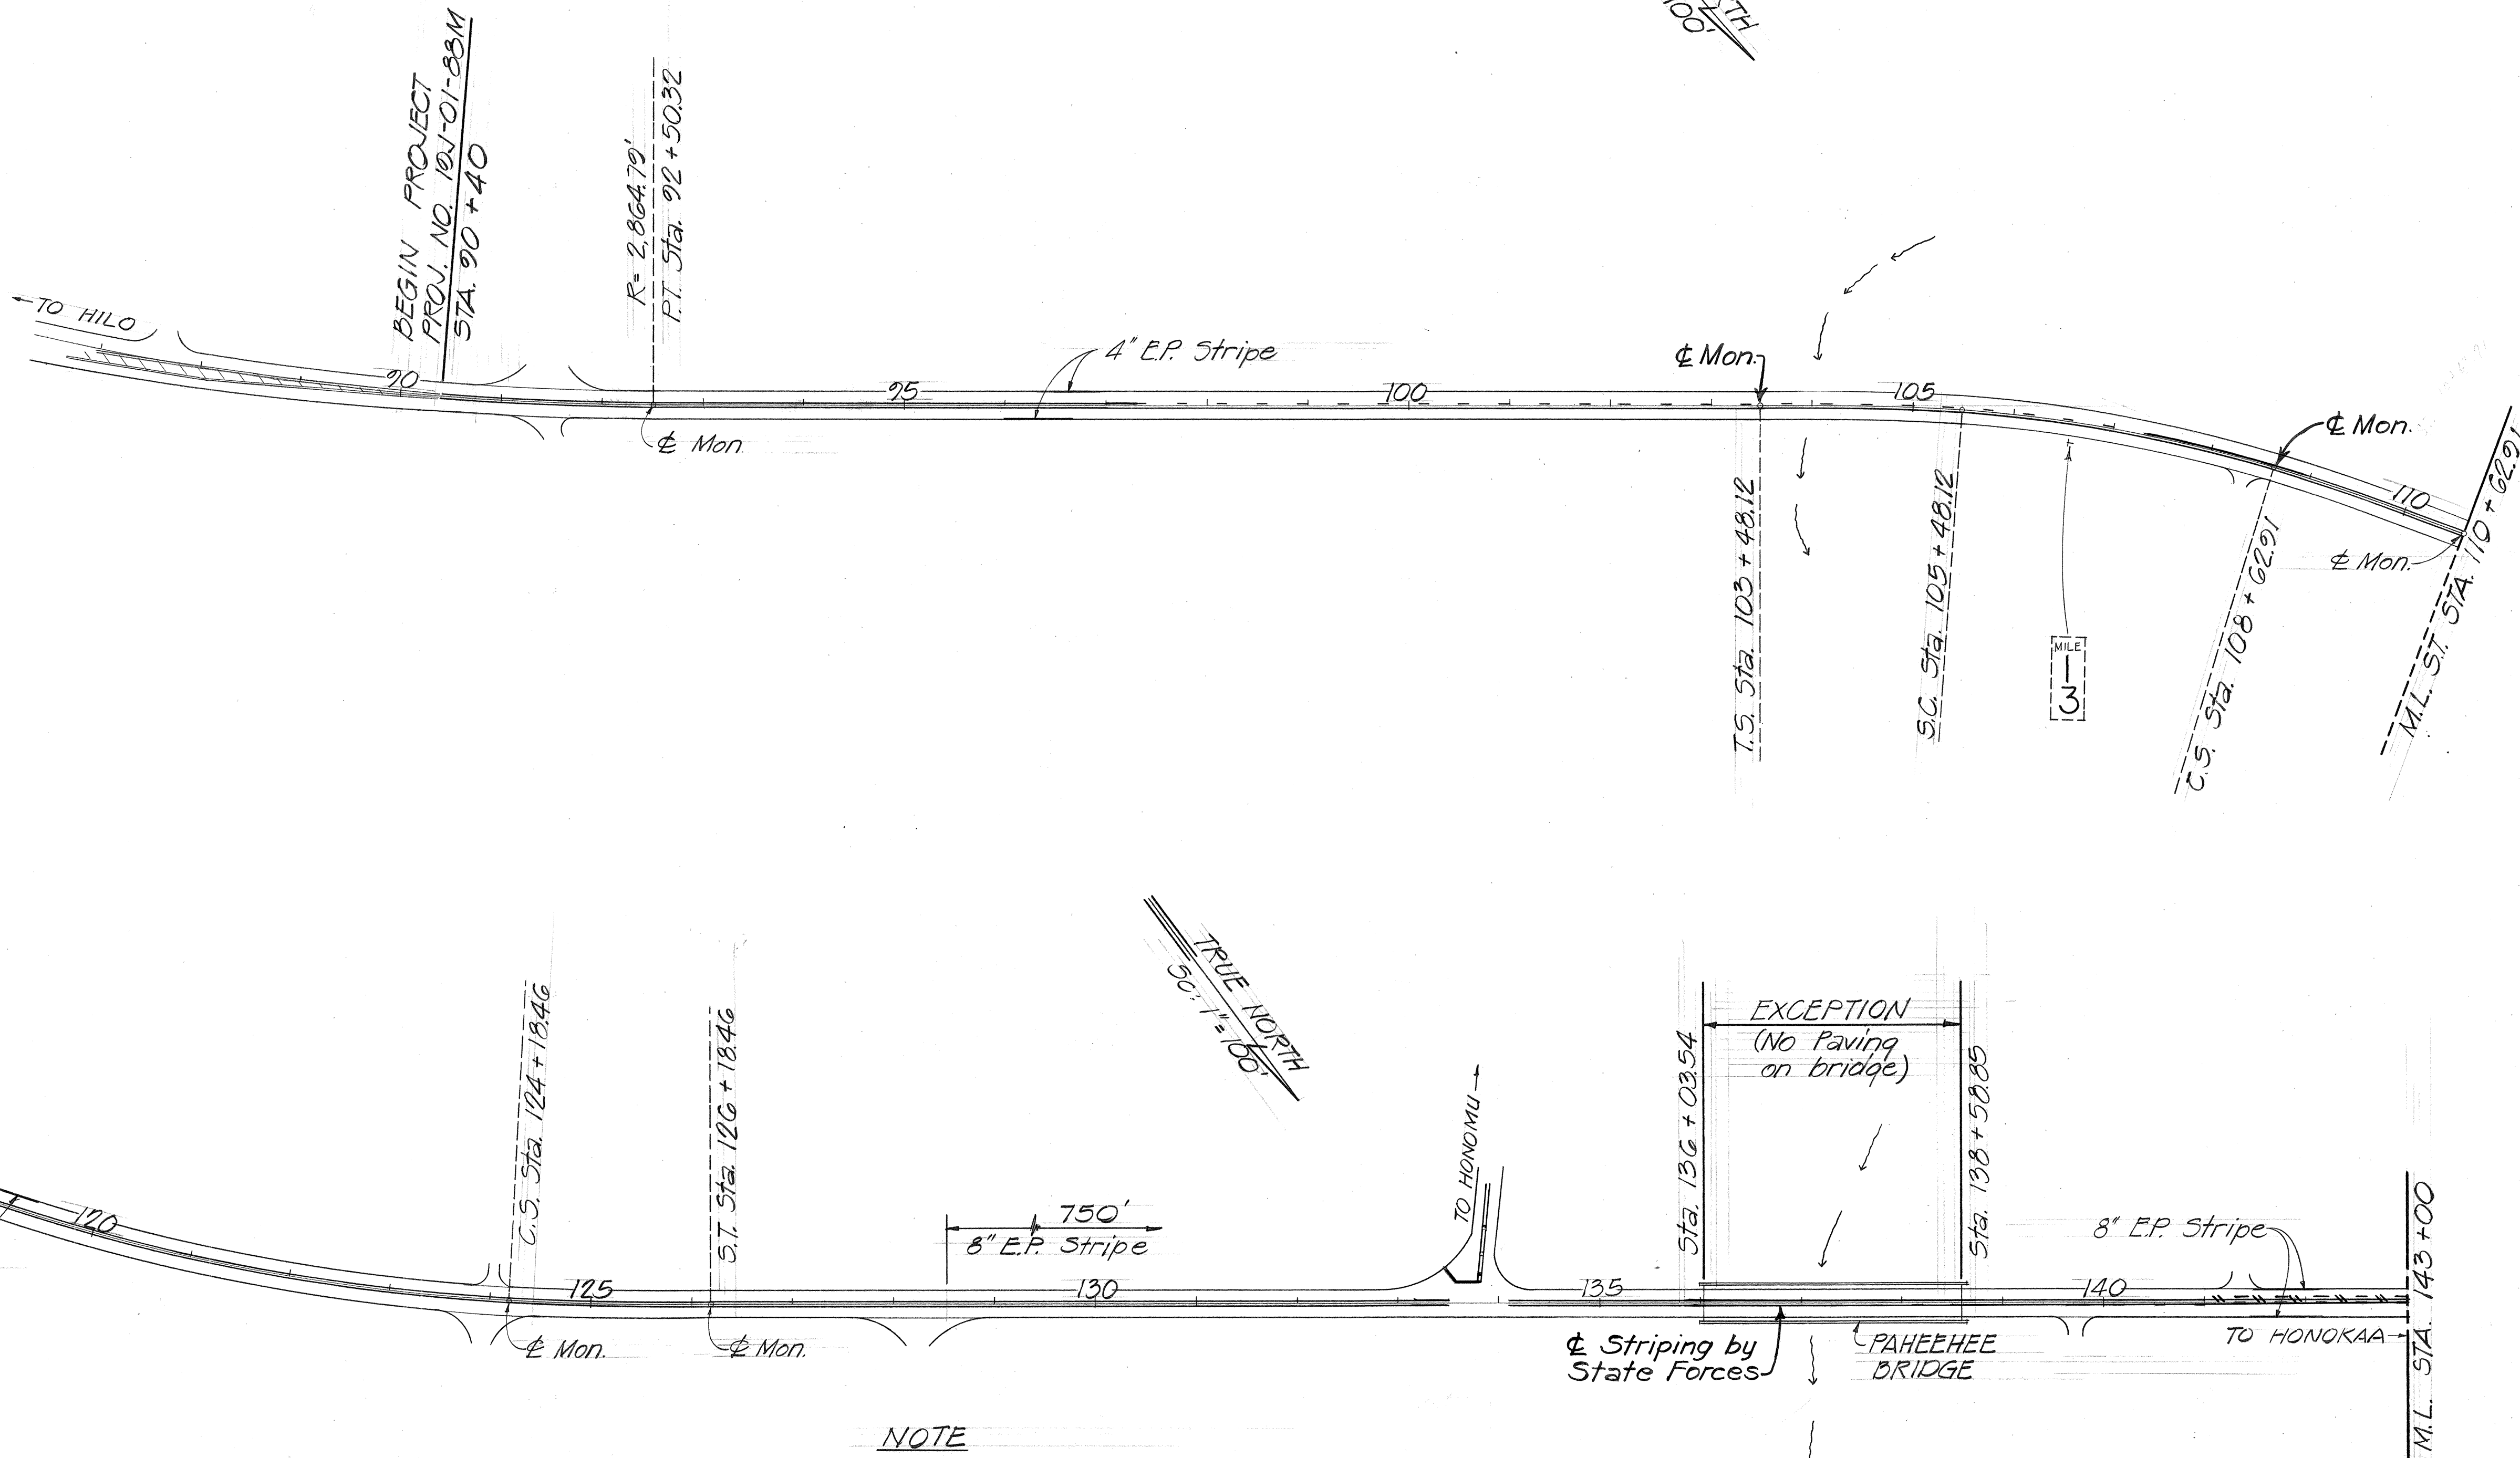

NOTE


1. Striping to be done by State forces.
2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the engineer. Costs shall be incidental to the various pavement marking items.
3. For bridge striping detail, see Standard Plan TE-67.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL LOCATION PLAN,
ROADWAY STRIPING PLAN
HAWAII BELT ROAD RESURFACING
PEPEKEO TO KOLEKOLE
PROJ. NO. 19J-01-88M
Scale: As Noted Date: Aug. 1987
SHEET No. 1 OF 2 SHEETS

ORIGINAL PLAN	DATE
NO.	
SURVEY PLOTTED BY	
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19J-01-88M	1988	7	10

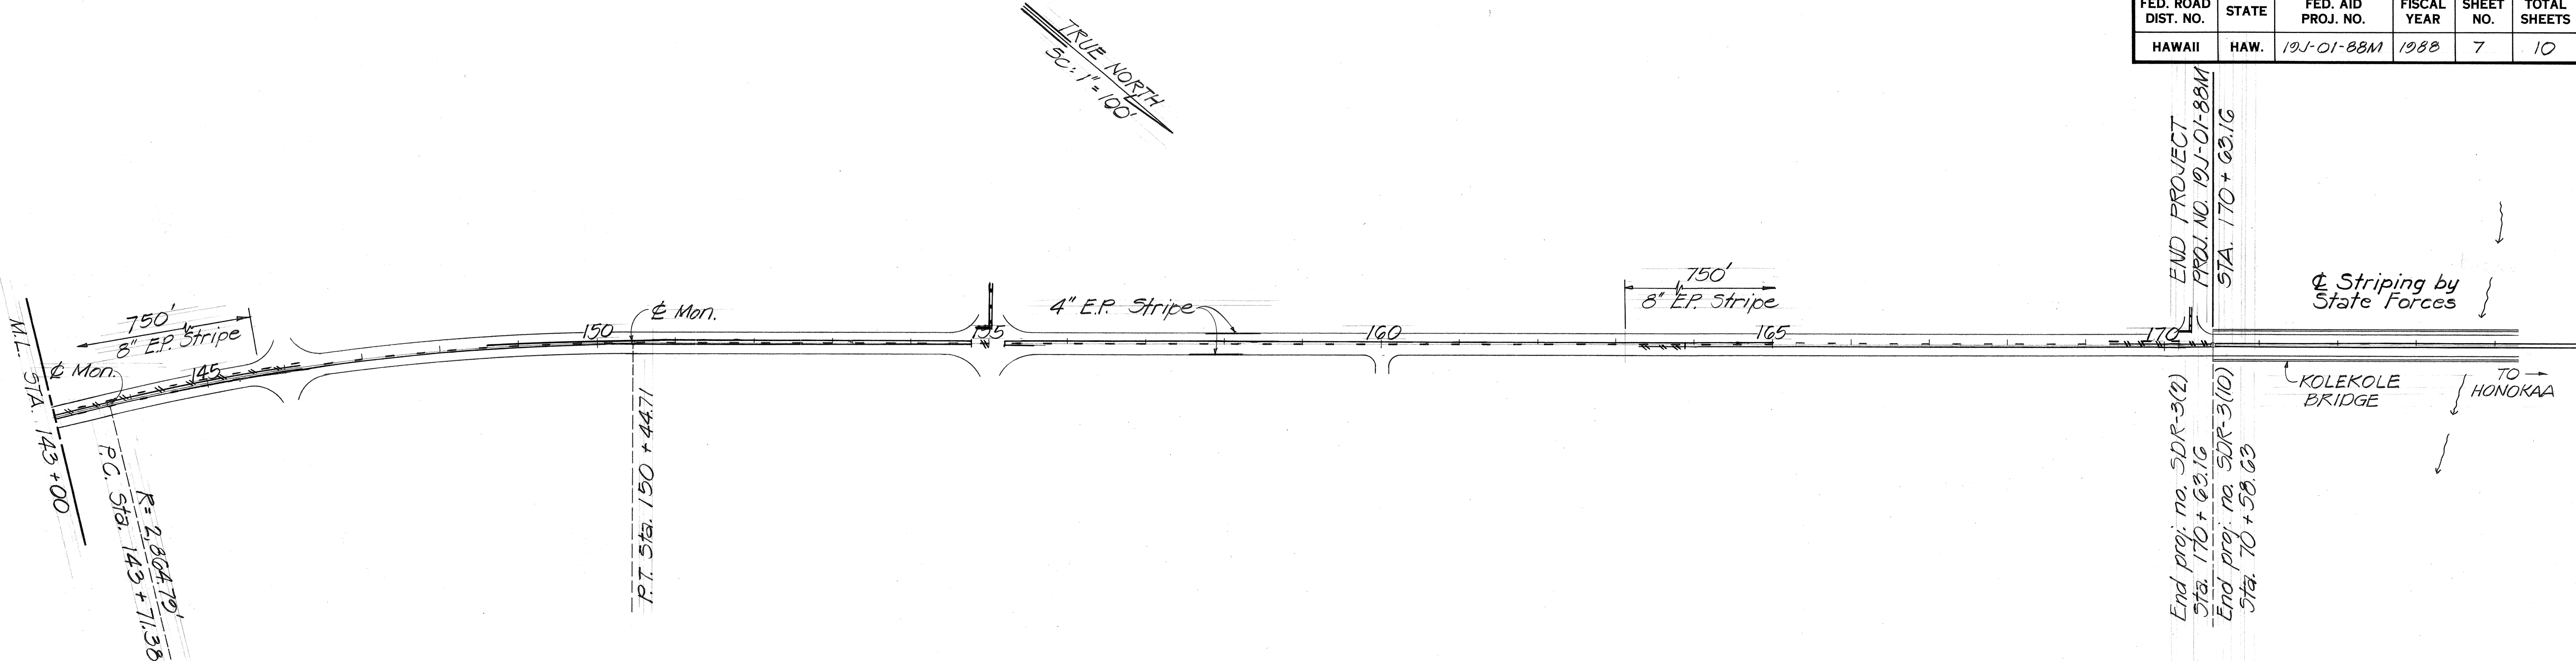

PAVEMENT MARKER SCHEDULE *						
PROJ. NO.	STATION		DESCRIPTION	TYPE		
	FROM	TO		DL	HL	J
SDR-3(2)	90 + 40	97 + 60	No Passing - Both Sides	34	2	
	97 + 60	107 + 20	Passing L - No Passing R	25	24	96
	107 + 20	133 + 30	No Passing - Both Sides	132		
	133 + 30	134 + 10	Open (Honolulu Road)	3		
	134 + 10	136 + 03.54	No Passing - Both Sides	10		
	136 + 03.54	138 + 58.85	Exception (Paheehoe Bridge)	13		
	138 + 58.85	141 + 00	No Passing - Both Sides	13		
	141 + 00	148 + 50	No Passing - Passing R	16	18	72
	148 + 50	154 + 80	No Passing - Both Sides	33		80
	154 + 80	155 + 60	Open (Road to)	3	15	50
	155 + 60	163 + 20	No Passing - Both Sides	21	20	80
	163 + 20	163 + 90	No Passing - Both Sides	6		
	163 + 90	165 + 00	No Passing - Both Sides	6		
	165 + 00	170 + 63.16	Passing L - No Passing R & Sideroad Lt.	45	13	52
	TOTALS			357	77	300

AND REFERENCE SURVEY MONUMENT SCHEDULE **	
PROJ. NO.	STATION
SDR-3(2)	P.T. Sta. 92 + 50.32
	S.T. Sta. 110 + 62.91
	T.S. Sta. 115 + 43.74
	S.C. Sta. 117 + 43.74
	C.S. Sta. 124 + 18.46
	S.T. Sta. 126 + 18.46
	P.C. Sta. 143 + 71.38
	P.T. Sta. 150 + 44.71
TOTAL	T.S. Sta. 103 + 48.12
	C.S. Sta. 108 + 62.91

CONSTRUCTION SIGN SCHEDULE ***	
STATION	Item no. 621.7/20 'Construction Sign with two Posts'
85 + 40 L	CG20-2 (60"x24")
90 + 40 R	CG20-1(2) (60"x36")
65 + 50 L	CG20-1(2) (60"x36")
65 + 50 R	CG20-2 (60"x24")
TOTAL	4 - Each

* - See 'Standard Plan TE-30' for raised pavement marker details.

** - See 'Standard Plan D-06' for details.

*** - See 'Standard Plans TE-01, TE-02, TE-03 and TE-08' for details.

ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
	TRACED BY	
	DESIGNED BY	
	QUANTITIES BY	
	CHECKED BY	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ROADWAY STRIPING PLAN,
MISC. SCHEDULES

HAWAII BELT ROAD RESURFACING
PEPEKEO TO KOLEKOLE
PROJ. NO. 19J-01-88M

Scale: As Noted Date: Aug. 1987

SHEET No. 2 OF 2 SHEETS