
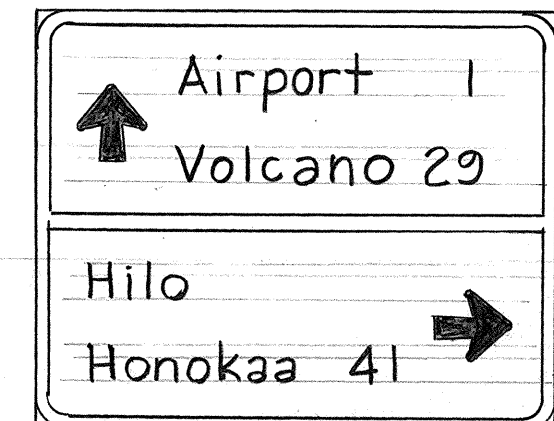



FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-019-2(32)	1995	5	26

NOTES:


1. Kamehameha Avenue / Banyan Drive / Kanoelehwa Avenue:
Remove existing traffic loops during cold planing operations. After resurfacing replace sensor loops as shown on these plans & Standard Plans TE-40.
2. For shoulder reconstruction details See Sheet No. 9.
3. Contractor shall remove by Cold Planing Asphalt Concrete overlay, as directed by Specification 652 - Cold Planing of Existing Pavement, these Plans and as directed by the Engineer.
4. Contractor shall schedule work to minimize traffic loop replacement time, Contractor shall coordinate all work affecting traffic signals with County Traffic Division, telephone no. 961-8341.
5. Contractor shall inspect and verify the layout and pairings of the various loop detectors to be replaced, prior to bidding.

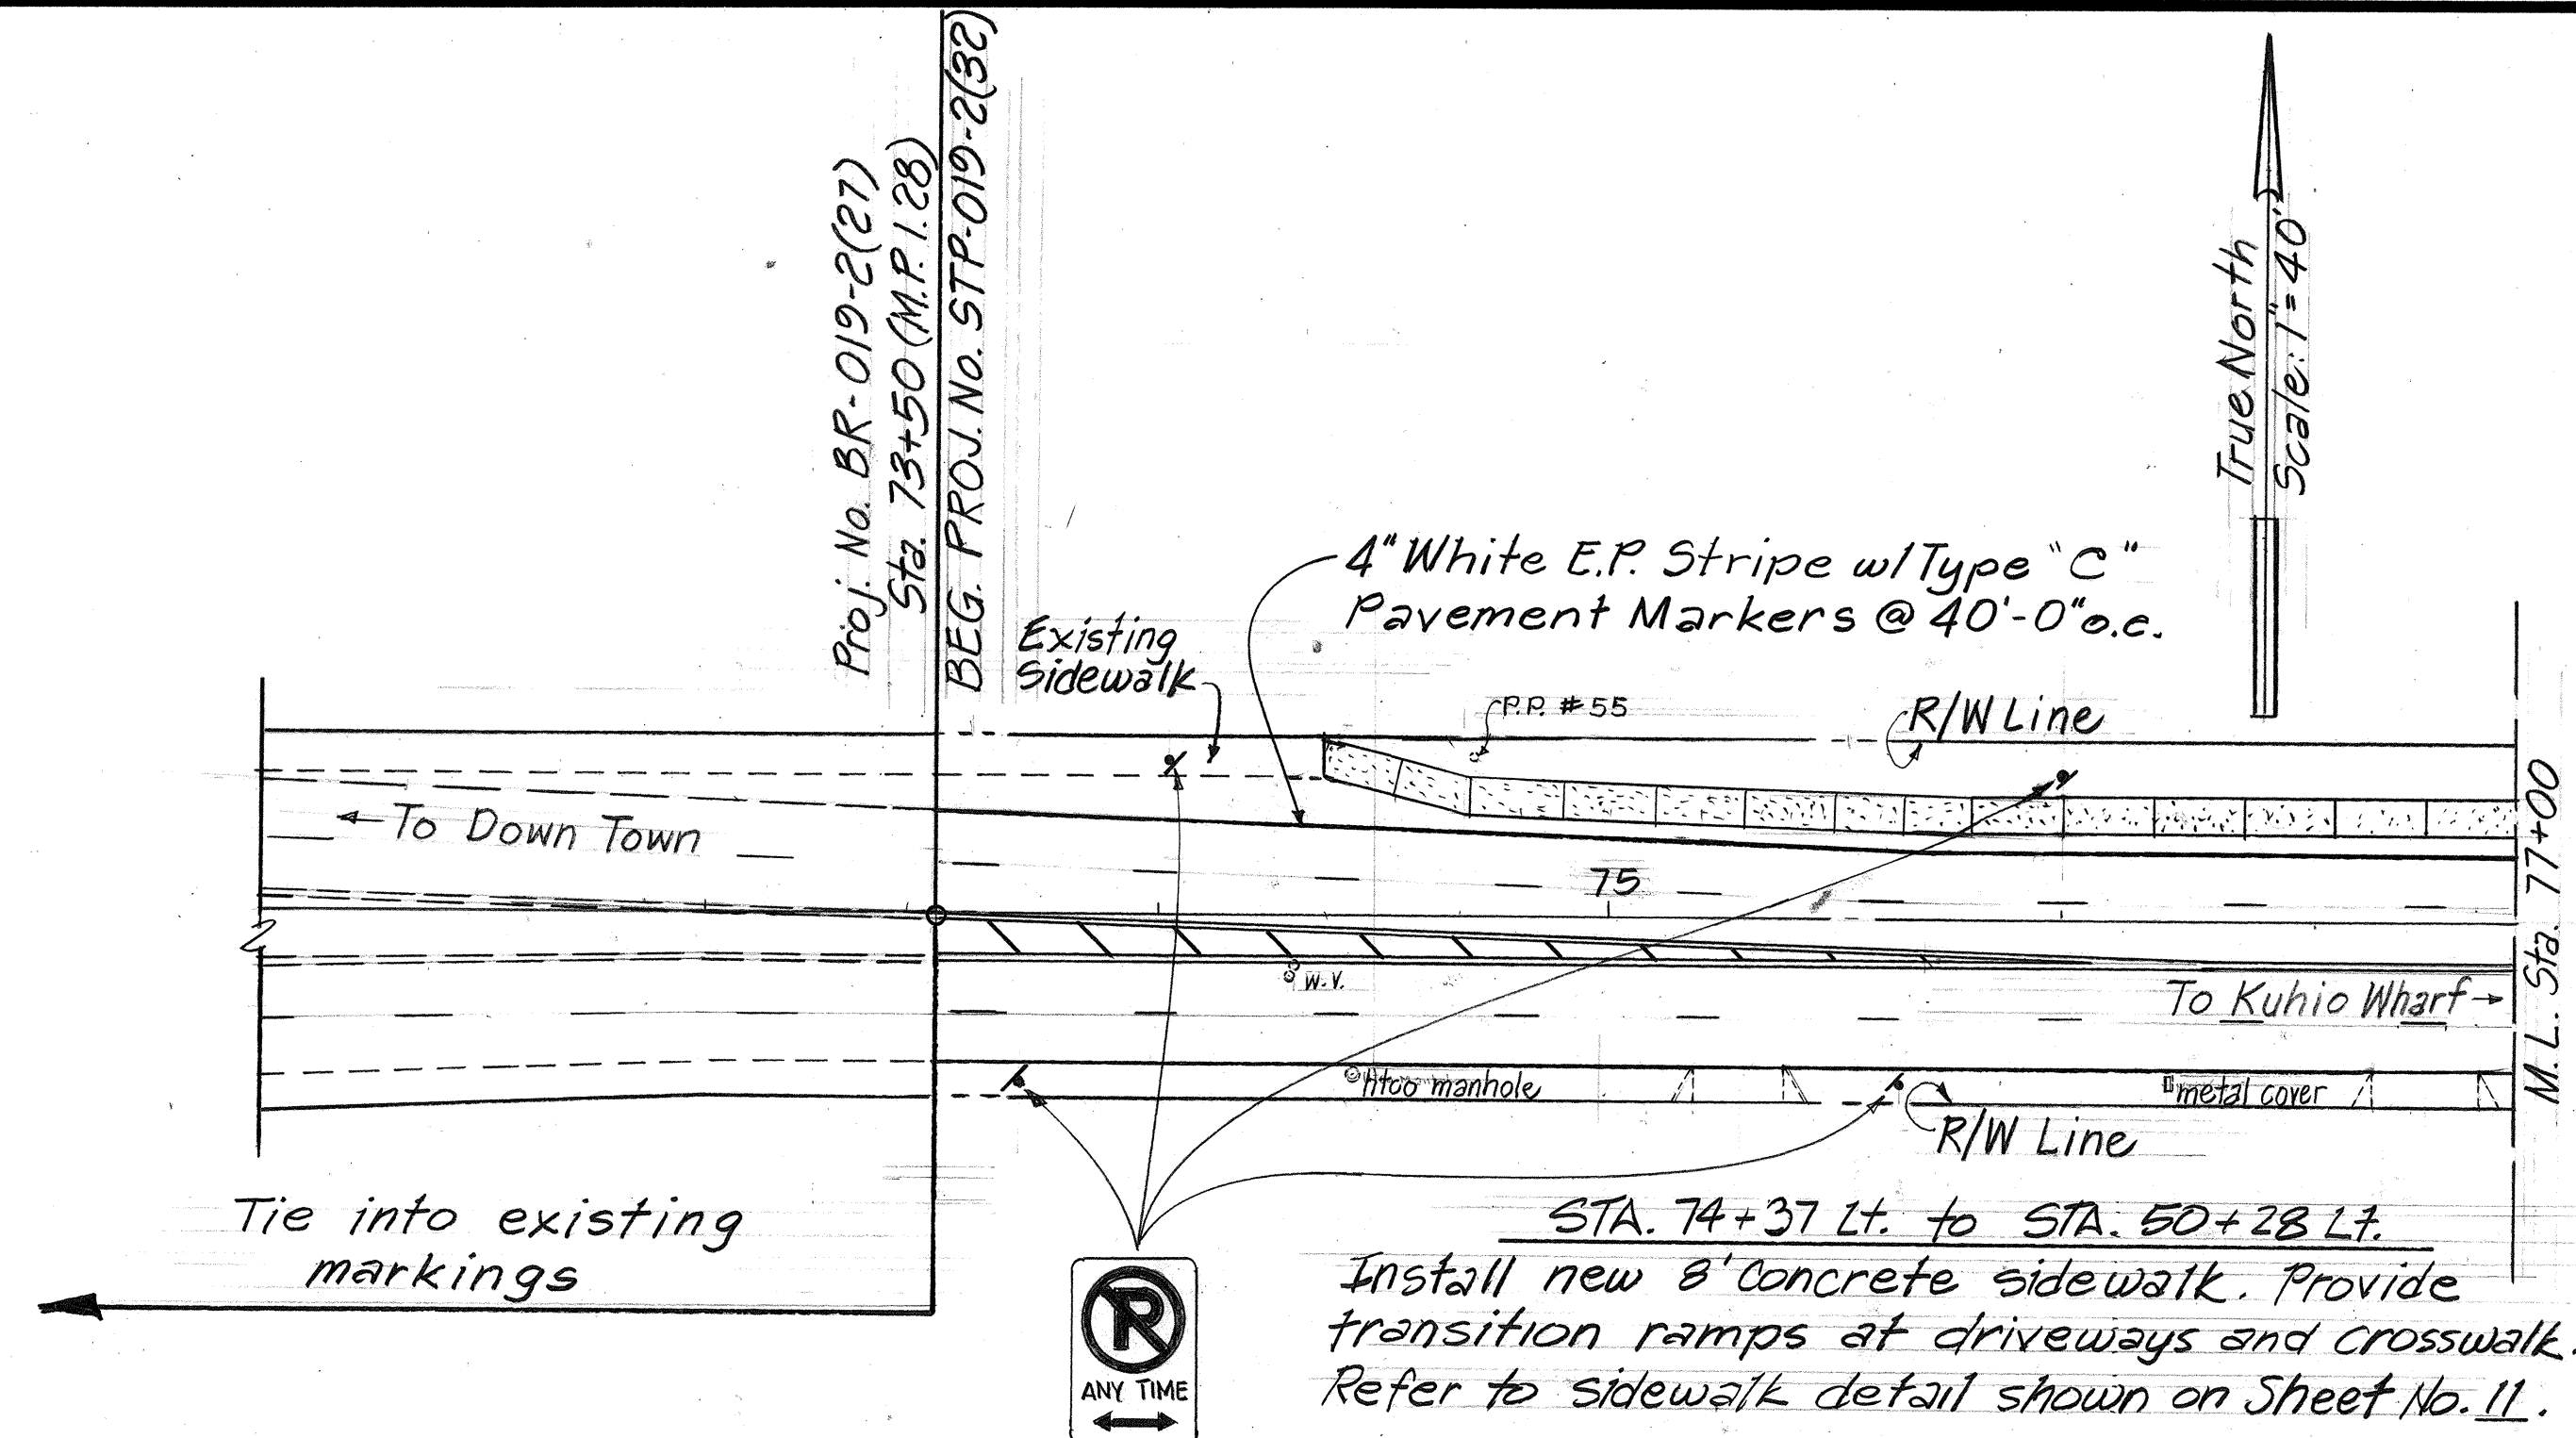

SPEED LIMIT 25

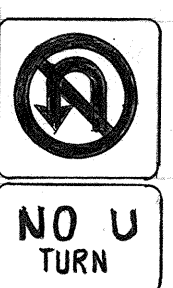


STA. 47+85 Lt. to 39'
Install new drywell. See Sheet No. 11 for details.

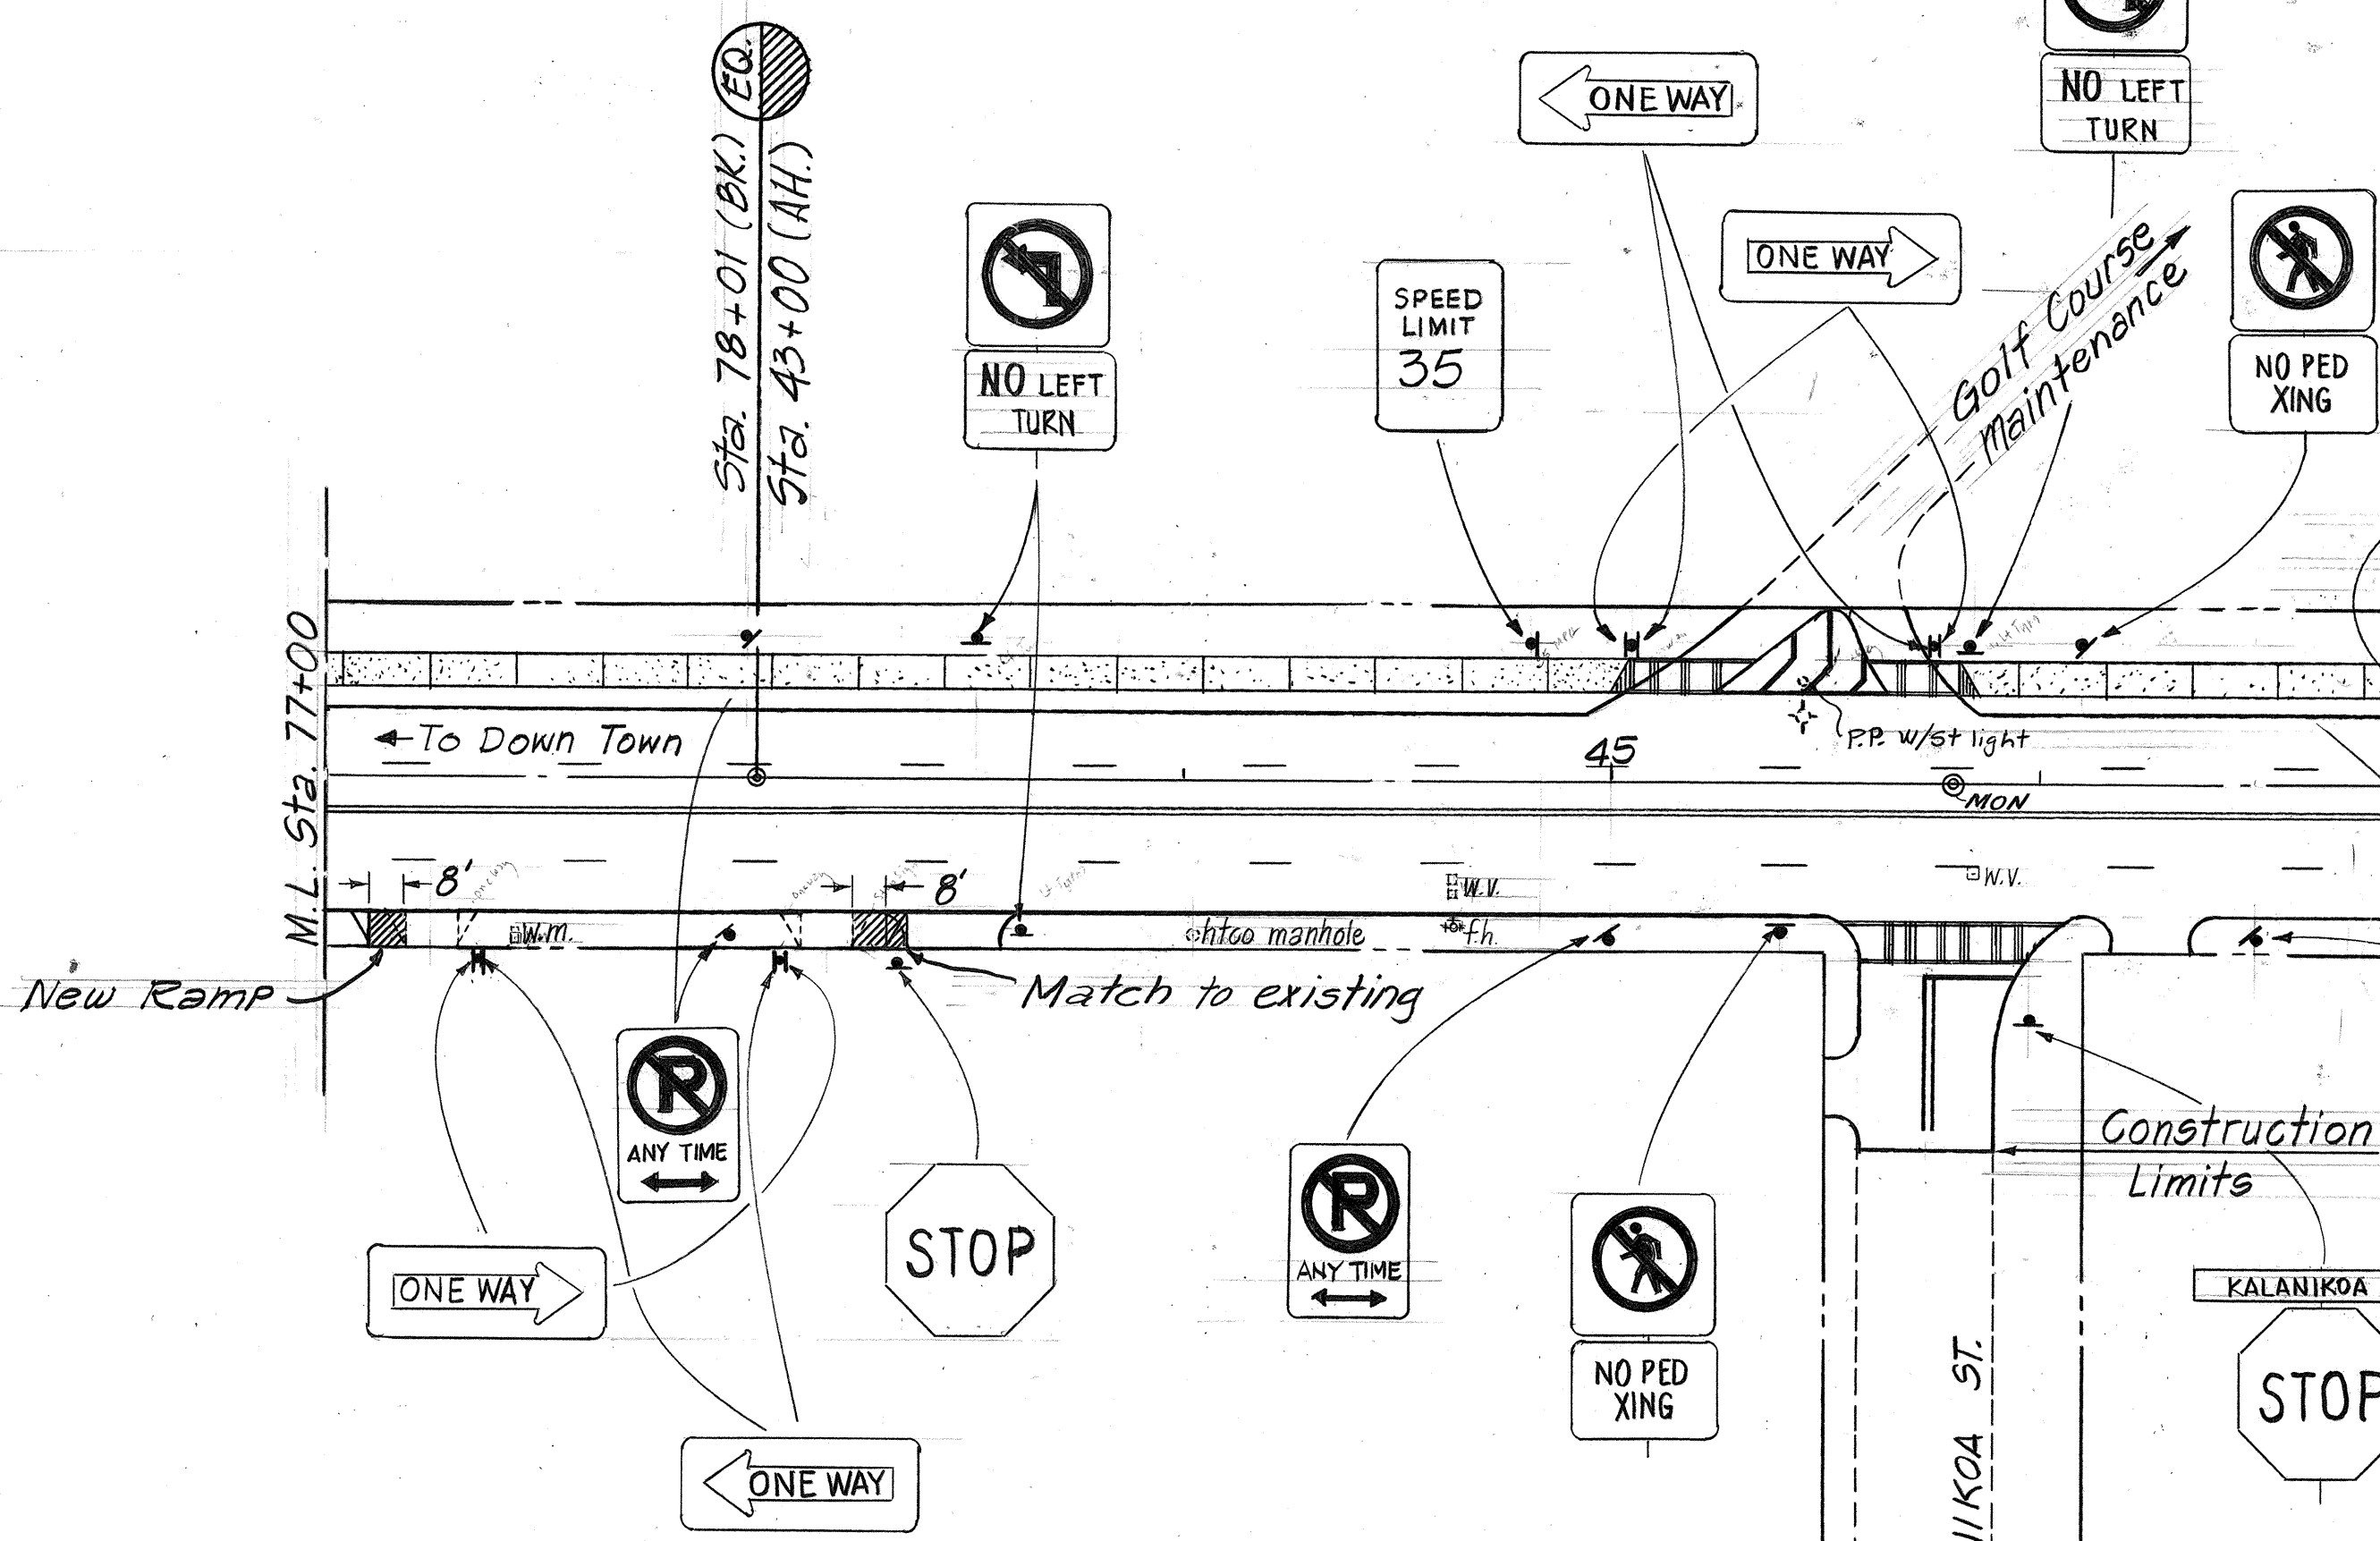

STA. 77+05 to STA. 43+37 Rt.

Widen both driveways as shown. Refer to Standard Plan D-05 for details. Refer to notes on Sheet No. 11 for item payment. Reconstruction of sidewalk ramps shall be paid under Item No. 608.1100, Concrete Sidewalk. Estimated quantity = 7 S.Y.

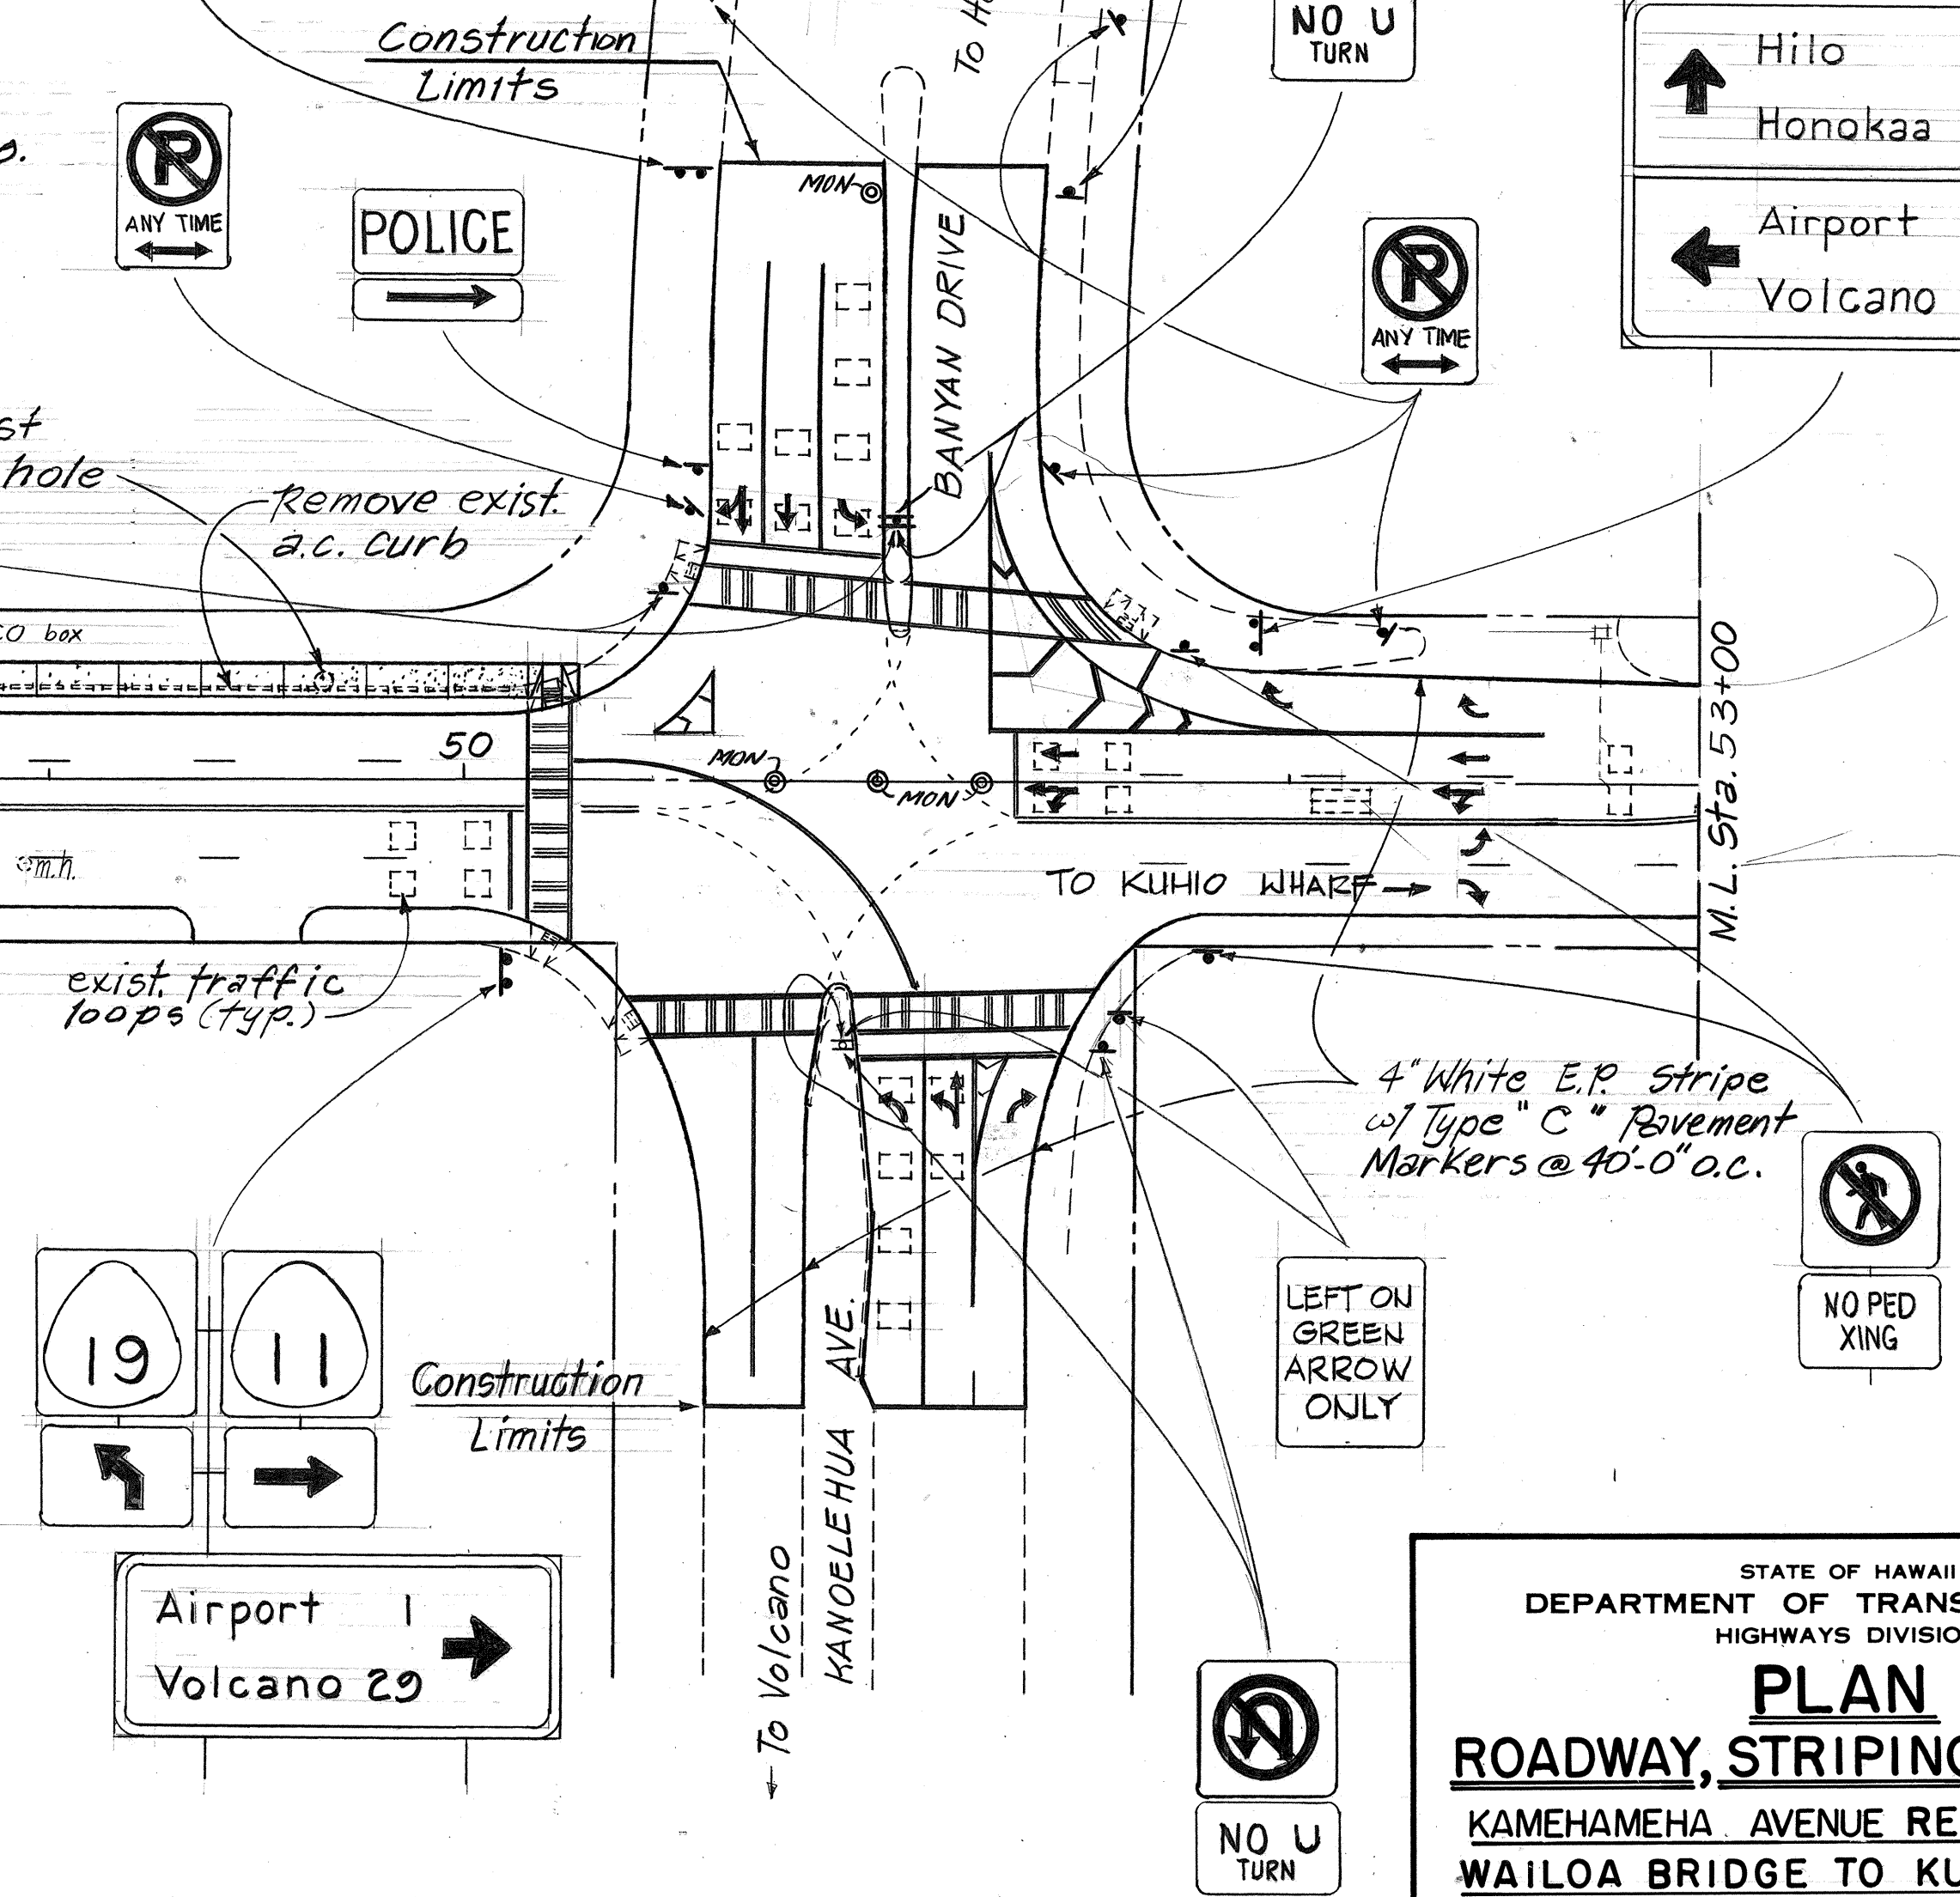

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN


ROADWAY, STRIPING & SIGNS

KAMEHAMEHA AVENUE RESURFACING
WAILOA BRIDGE TO KUHIO WHARF
F.A. PROJECT NO. STP-019-2(32)

Scale: 1" = 40' Date: April, 1995
SHEET NO. 1 OF 4 SHEETS

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
NO.	

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-019-2(32)	1995	6	26

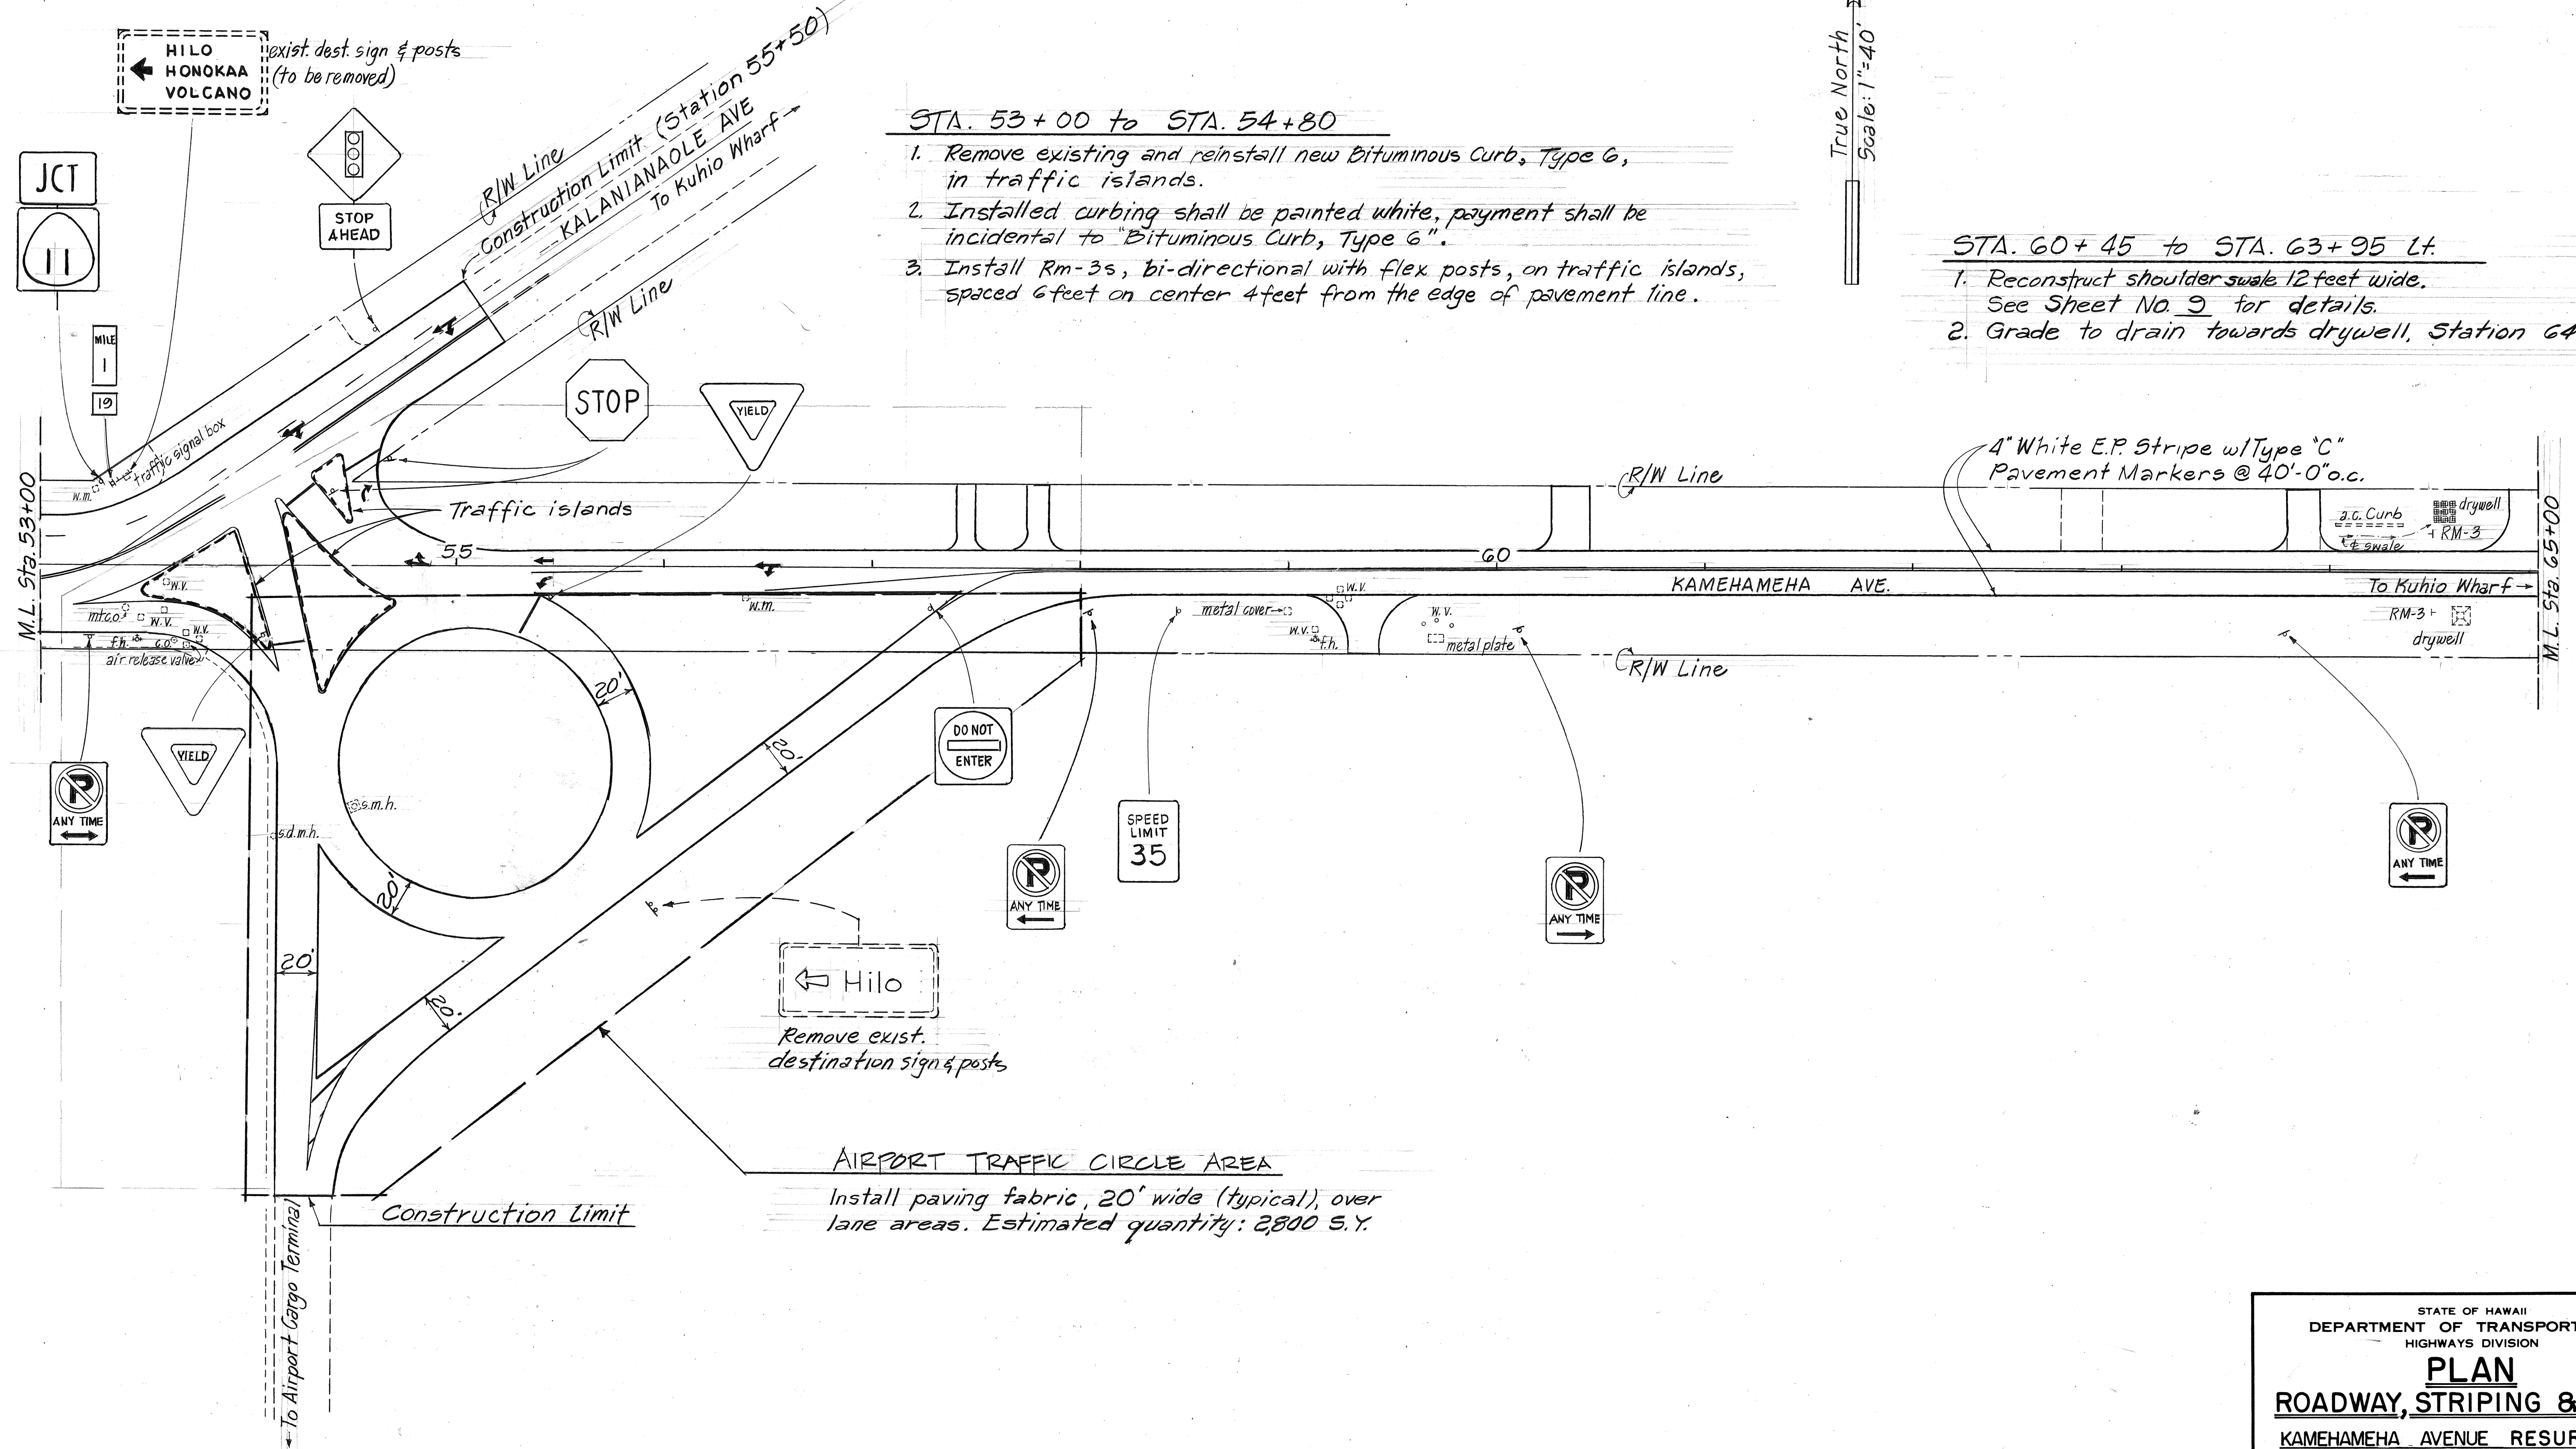

STA. 53+00 to STA. 54+80

1. Remove existing and reinstall new Bituminous Curb, Type G, in traffic islands.
2. Installed curbing shall be painted white, payment shall be incidental to "Bituminous Curb, Type G".
3. Install Rm-3s, bi-directional with flex posts, on traffic islands, spaced 6 feet on center 4 feet from the edge of pavement line.

STA. 60+45 to STA. 63+95 Lt.

1. Reconstruct shoulders 12 feet wide. See Sheet No. 9 for details.
2. Grade to drain towards drywell, Station 64+60 Lt.


DATE	_____
SURVEY PLOTTED BY	_____
DRAWN BY	_____
TRACED BY	_____
CHECKED BY	_____
NO.	_____

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN
ROADWAY, STRIPING & SIGNS
KAMEHAMEHA AVENUE RESURFACING
WAILOA BRIDGE TO KUHIO WHARF
F.A. PROJECT NO. STP-019-2(32)

Scale: 1" = 40' Date: April, 1995
SHEET NO. 2 OF 4 SHEETS

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-019-2(32)	1995	7	26

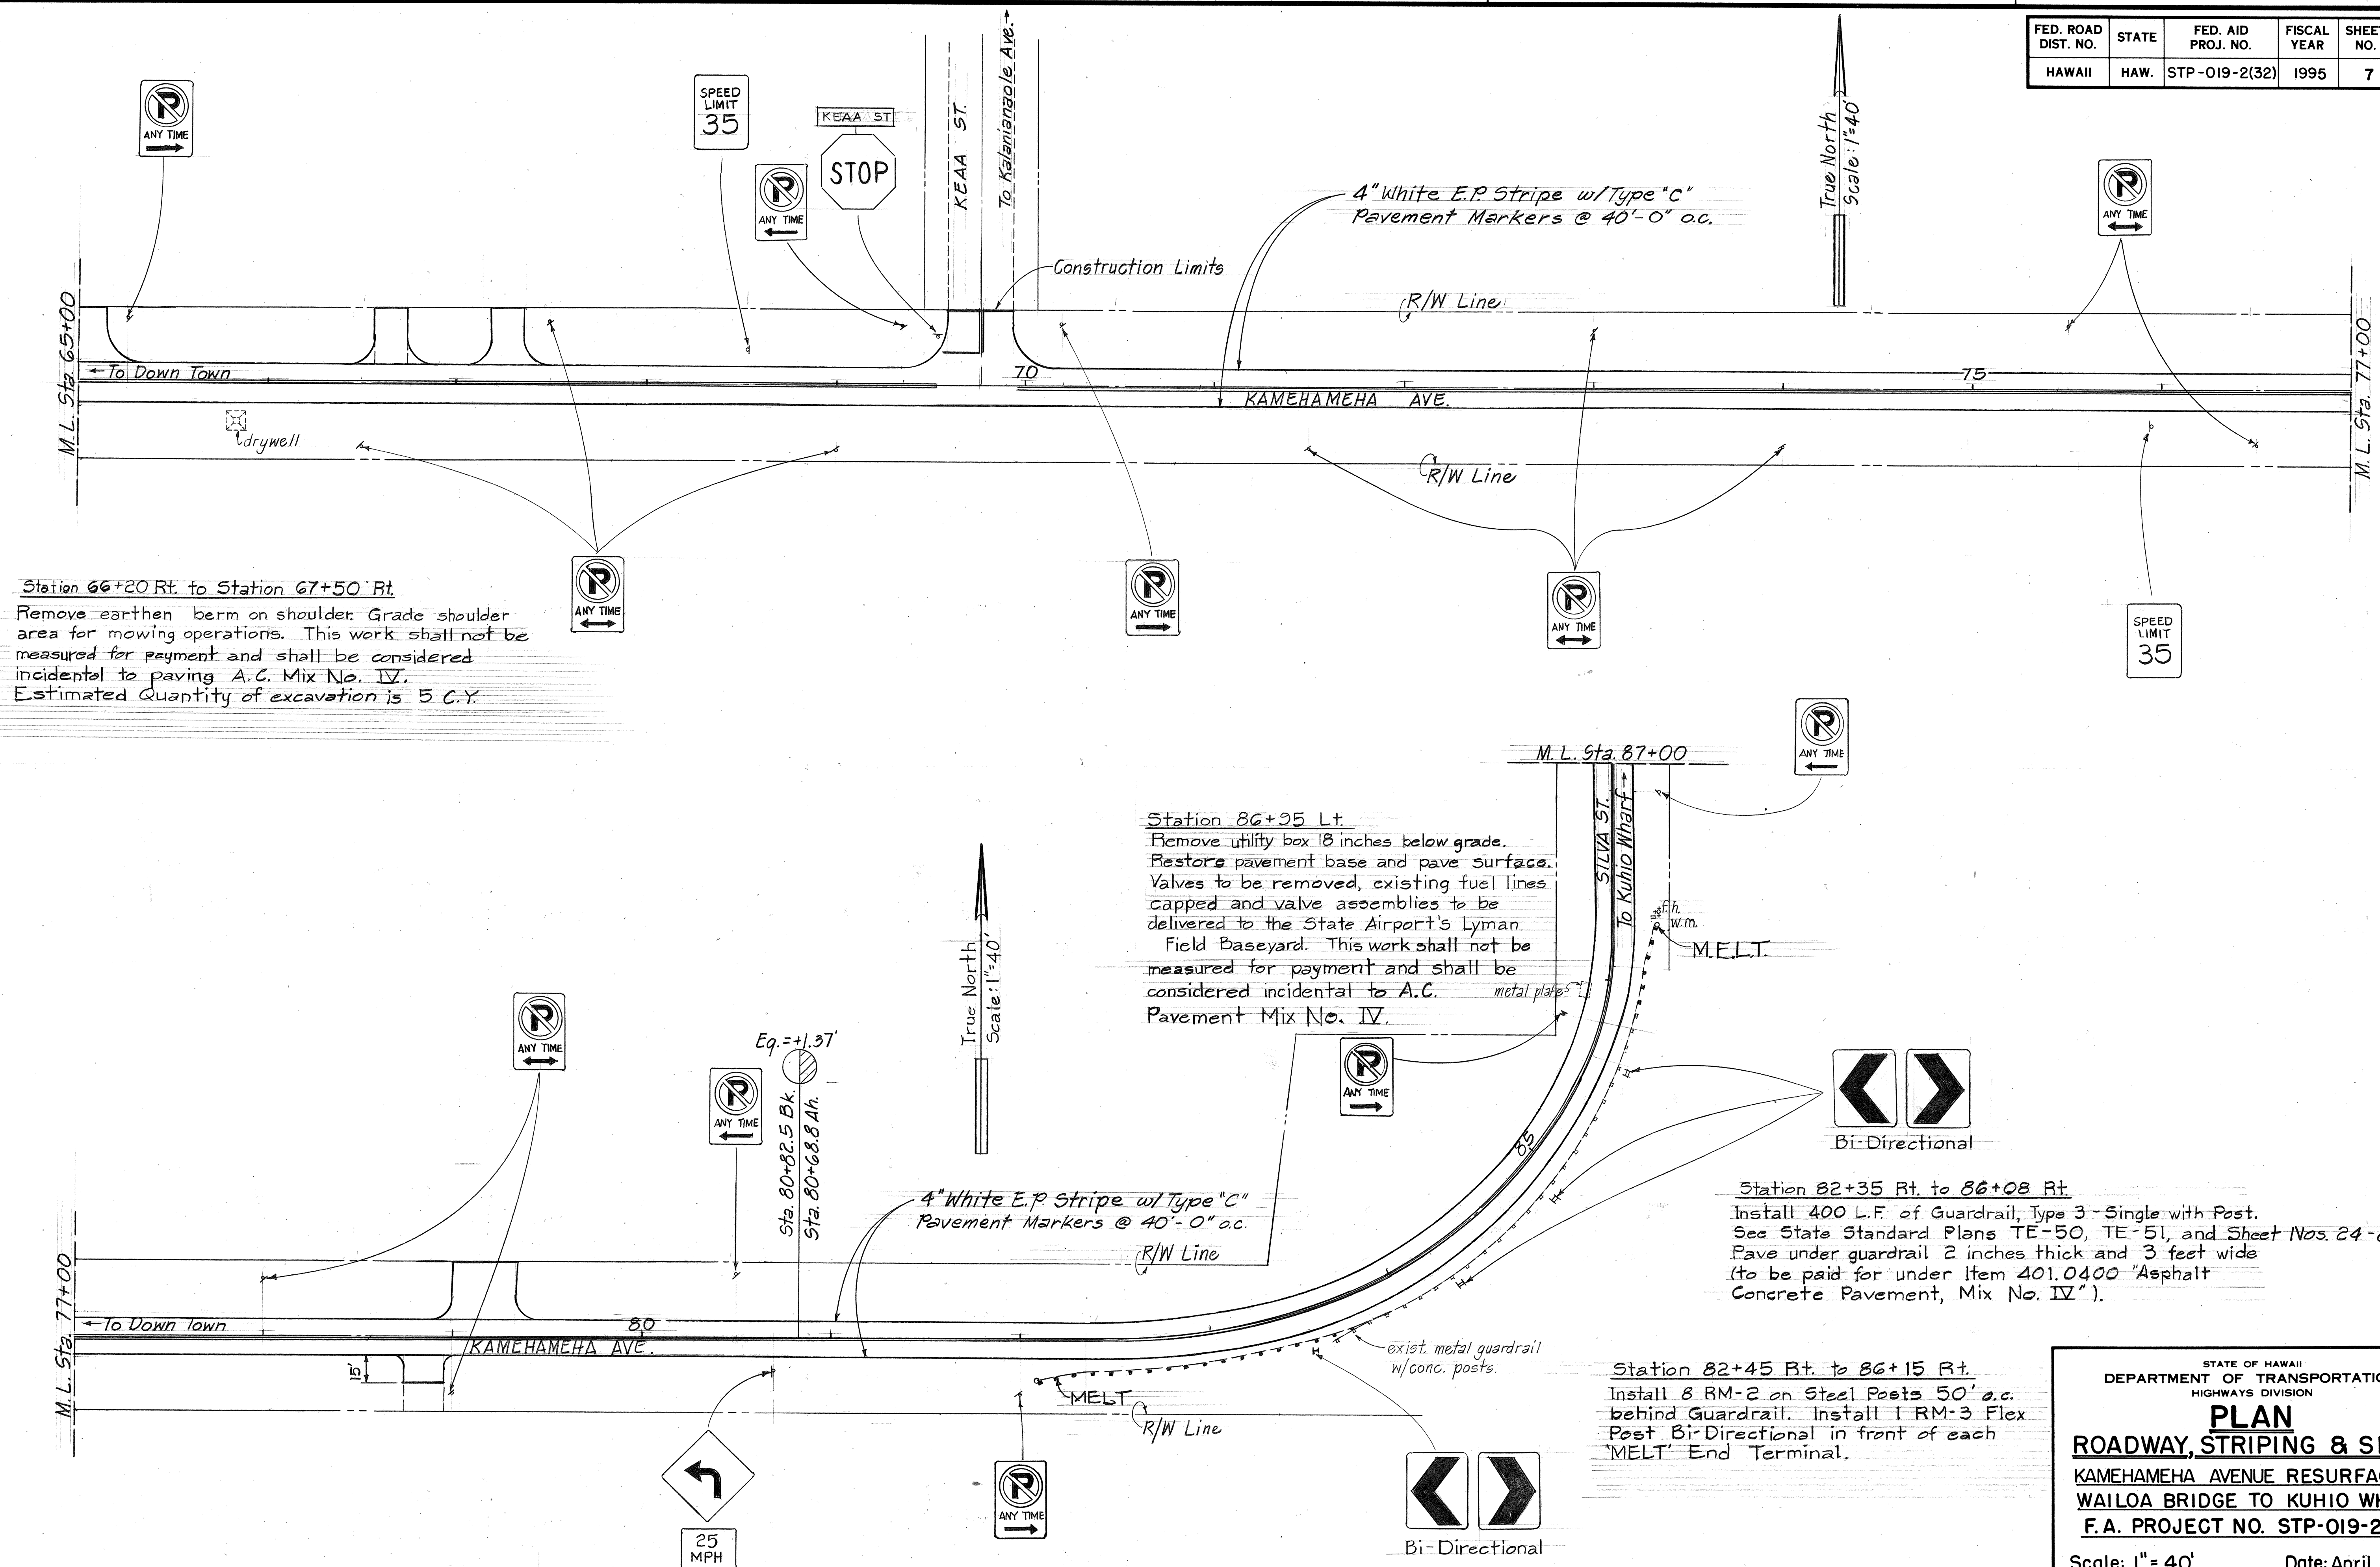

ORIGINAL PLAN	SURVEY PLOTTED BY _____ DATE _____
NOTE BOOK	DRAWN BY _____
	TRACED BY _____
	DESIGNED BY _____
	QUANTITIES BY _____
No. _____	CHECKED BY _____

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN


ROADWAY, STRIPING & SIGNS

KAMEHAMEHA AVENUE RESURFACING
WAILOA BRIDGE TO KUHIO WHARF
F.A. PROJECT NO. STP-019-2(32)

Scale: 1" = 40' Date: April, 1995

SHEET No. 3 OF 4 SHEETS

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-019-2(32)	1995	8	26

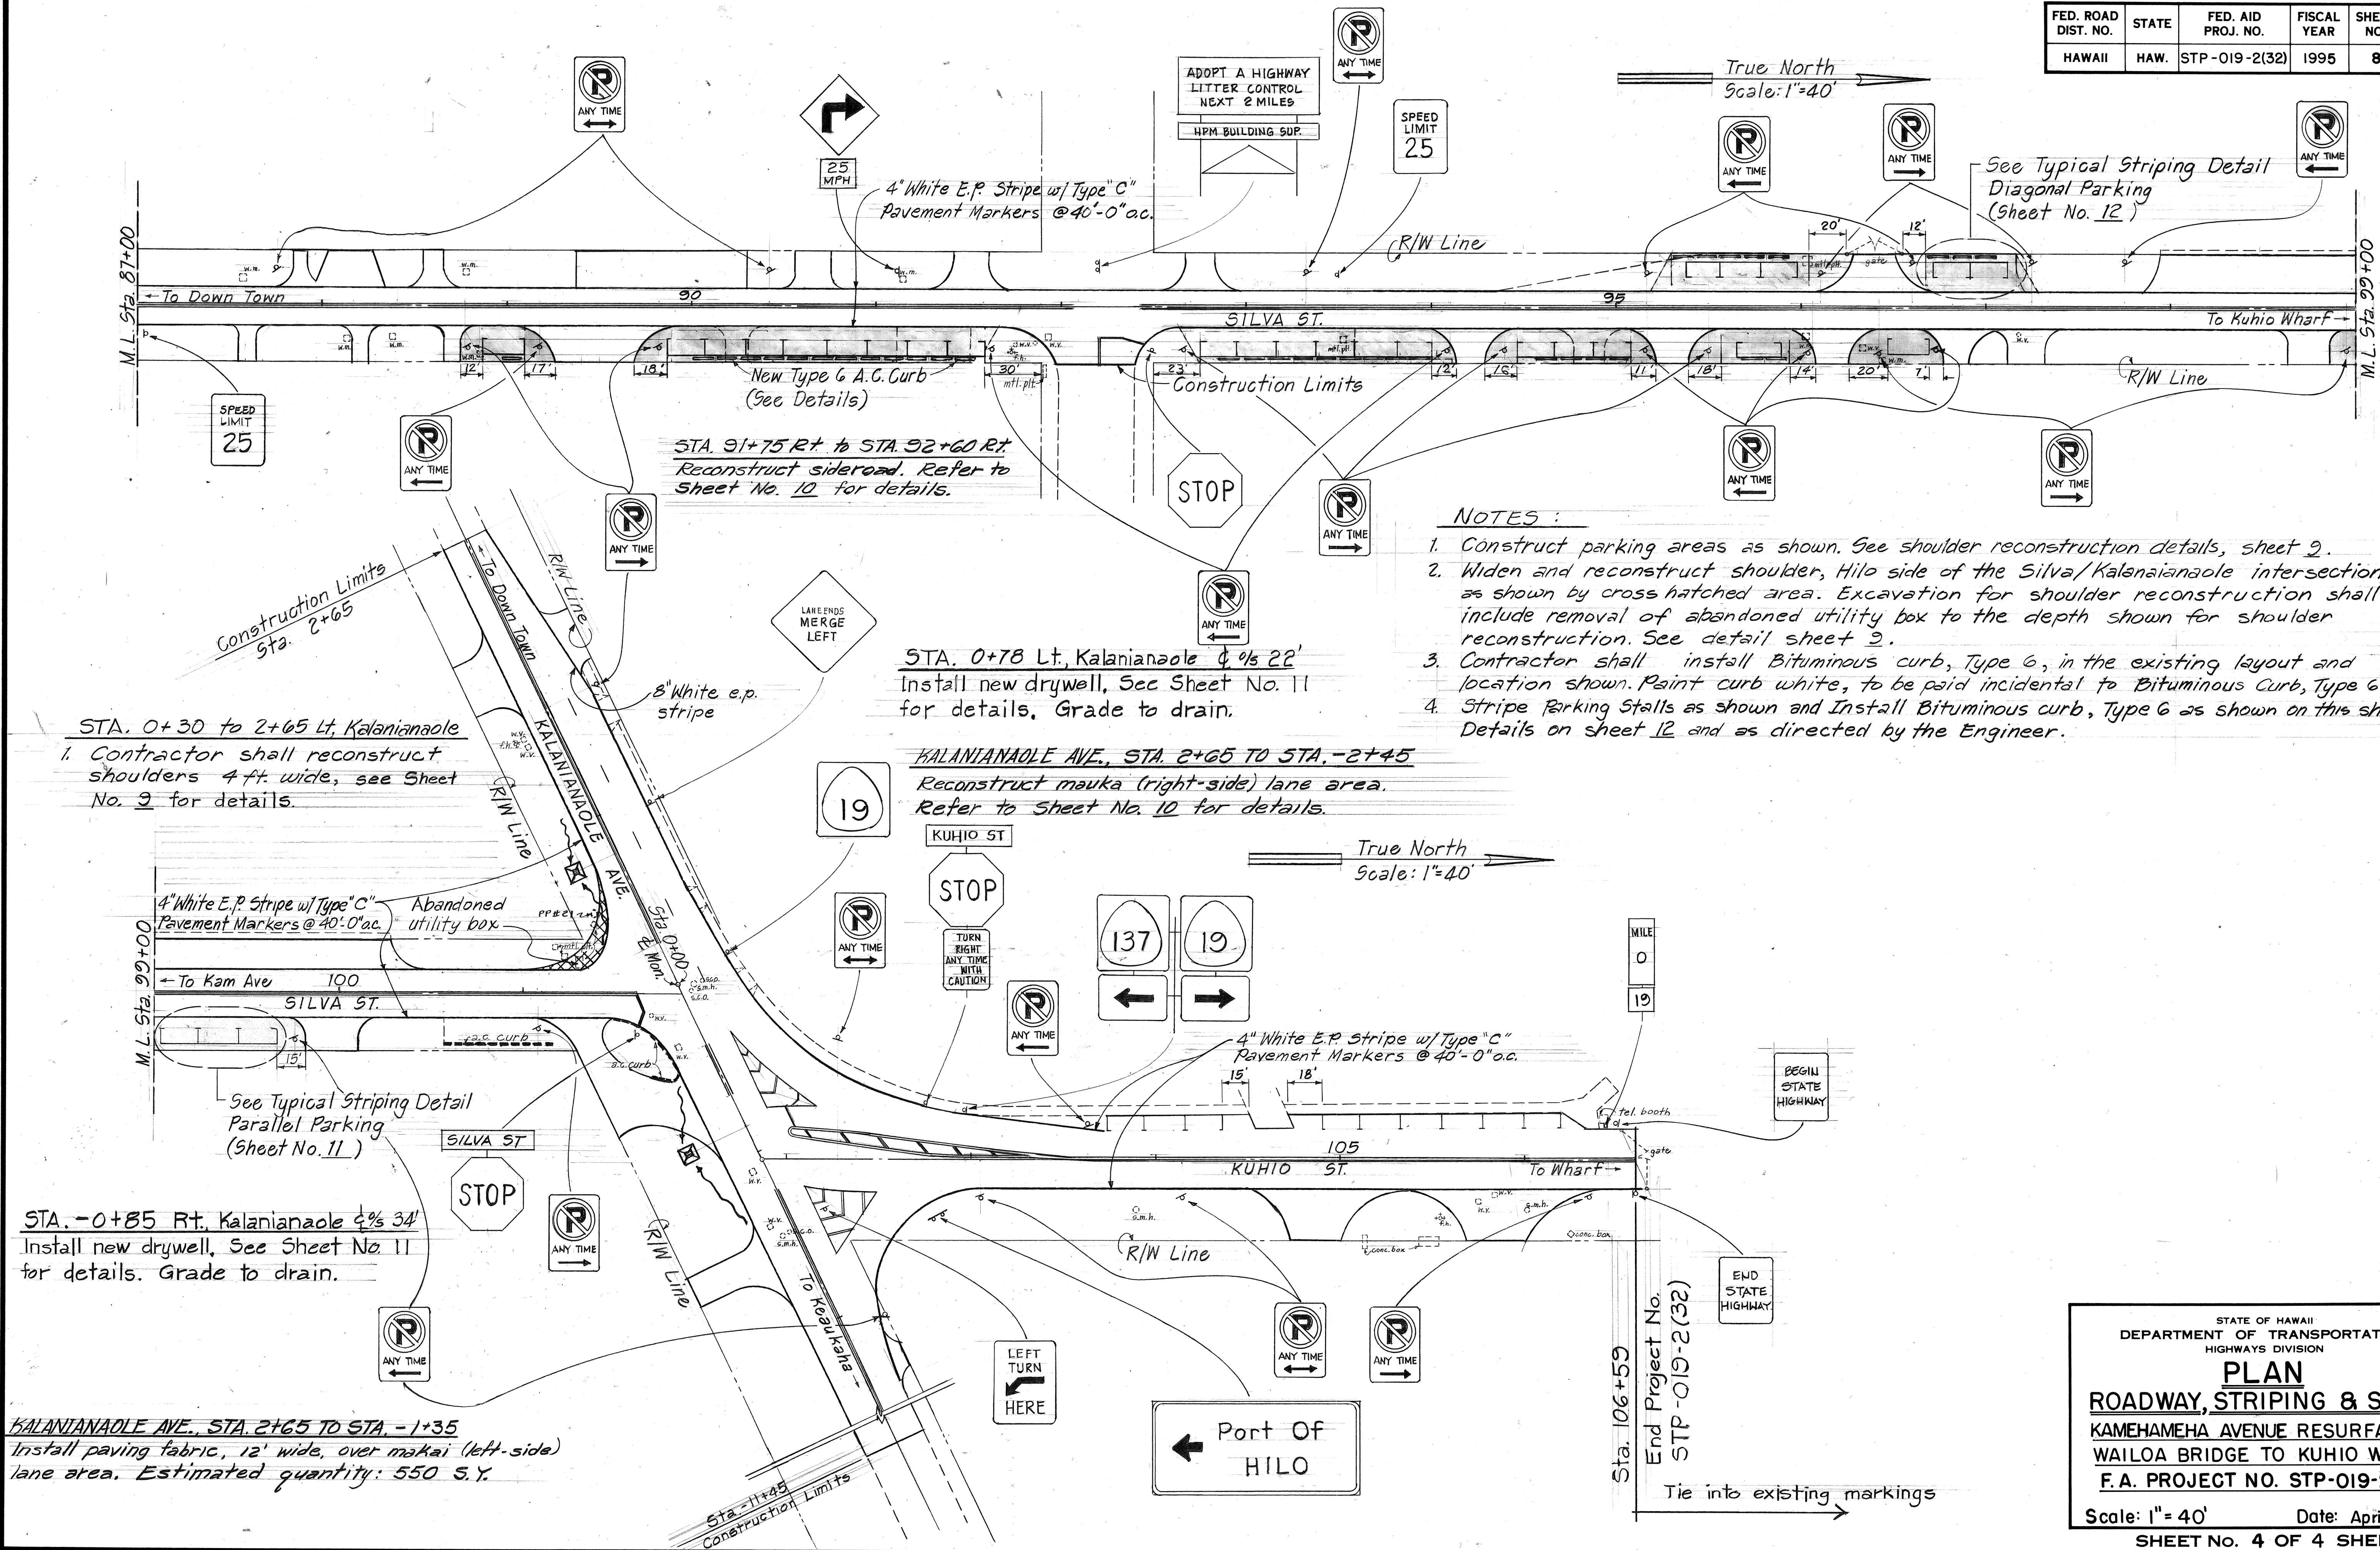

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
ORIGINAL PLAN	
NOTE BOOK	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN
ROADWAY, STRIPING & SIGNS
KAMEHAMEHA AVENUE RESURFACING
WAILOA BRIDGE TO KUHIO WHARF
F.A. PROJECT NO. STP-019-2(32)

Scale: 1" = 40' Date: April, 1995
SHEET NO. 4 OF 4 SHEETS