

Amend **Section 645 – Traffic Control Devices** to read as follows:

**“SECTION 645 - WORK ZONE TRAFFIC CONTROL**

**645.01 Description.** This section describes the following:

(A) Furnishing, installing, maintaining and subsequently removing work zone traffic control devices, and personnel. Work zone traffic control shall include providing flaggers and police officers.

(B) Keeping roads for public traffic open and in passable condition; providing and maintaining temporary access crossings for trails, businesses, parking lots, garages, residences, farms, parks, and other driveways; taking necessary work precautions for the protection, safety, and convenience of the public; should pedestrian facilities exist, taking necessary measures for safe and accessible passage, with route information and ADAAG compliance, for pedestrians traveling through or near work zone.

(C) Taking safety and precautionary measures, such as illuminating roadway obstructions during hours of darkness, in accordance with Chapter 286, HRS; Title 19, Subtitle 5, Chapters 127, 128, and 129, HAR; and *MUTCD*.

**645.02 Materials.**

Signs	712.20
Reflector Marker	712.21
Traffic Delineators	712.46
Preformed Pavement Marking Tape	712.53
Sign Posts	713.11
Fasteners for Signs	713.12

Submit 10 sets of FHWA approval letters certifying compliance with NCHRP Report 350 for signs, sign supports, barricades, delineators, cones, vertical panels, and other traffic control devices. Use of signs, sign supports, barricades, delineators, cones, vertical panels, and other traffic control devices that are not certified to be NCHRP Report 350 compliant will not be allowed.

Upon request of the Engineer, furnish self-certified NCHRP Report 350 compliant letter from vendor for each type of Category 1 traffic control device, as defined in NCHRP Report 350, including single-piece traffic cone, single-piece drum, tubular marker, and delineator.

Traffic control devices, including signs, barricades, warning lights, arrow boards, changeable message signs, cones, delineators, and markers, shall conform to the American Traffic Safety Services Association (ATSSA), *Quality Standards for Work Zone Traffic Control Devices* and *MUTCD*.

Protective devices including barricades, warning signs, lights, and temporary signals shall conform to Title 19, Subtitle 5, Chapters 127, 128, and 129, HAR. Reflectorization for protective devices such as barricades, delineators, and warning signs shall conform to Subsection 712.20 – Signs.

**645.03 Construction.** Furnish, install, and maintain barricades, signs, cones, delineators, lights, flashing signals, and other traffic control devices

Furnish two police officers for each location that requires work zone traffic control. If TCP is included in the contract documents, furnish number of police officers indicated in TCP.

When directing traffic, flaggers or police officers, or both shall be in direct communication with each other.

Submit TCP and schedule at least 15 working days before work starts. Submit modifications and deviations from accepted TCP and schedule at least 15 working days before start of work requiring modification or deviation. Illegible TCP will not be accepted.

Include the following in TCP and schedule:

- (1) Signs (type, size, designation, and placement).
- (2) Traffic movements shown by arrows.
- (3) Positions of flaggers and police officers.
- (4) Barricades, cones, delineators, and additional traffic control devices and measures necessary for protection of work and public safety; and placement, spacing, distances, and reference points for traffic control devices.
- (5) Layout, drawn to scale, of traffic control devices, including information needed to layout TCP.
- (6) Brief description of work.
- (7) Dates of work.
- (8) Times of day affected.

95           **(9)**     Proposed public information sign.

96

97           **(10)**    Proposed news release.

98

99           Place sign or device situated farthest upstream from work zone first. Then  
100 place others progressively downstream toward work zone.

101

102           Extend cones or delineators to point where cones or delineators are visible to  
103 approaching traffic.

104

105           For signs with messages on both faces, cover inapplicable message before  
106 placement.

107

108           Keep barricades, construction and warning signs, and other traffic control  
109 devices in good condition. Repair, clean, or replace barricades, signs, or other  
110 devices as required to maintain effectiveness and appearance. The Engineer alone  
111 will decide suitable condition of each barricade, sign, or other traffic control device.

112

113           Remove or cover regulatory and warning signs that conflict with TCP.  
114 Restore signs upon completion of work or as ordered by the Engineer. Affix object  
115 markers to post(s) of covered sign.

116

117           Promptly remove or cover construction and warning signs that are not  
118 applicable or not in use.

119

120           Promptly remove traffic control devices that are no longer needed.

121

122           Remove traffic control devices in reverse order of installation, starting closest  
123 to work zone and continuing away from work zone.

124

125           Maintain abutting owners' existing access until replacement access is usable.

126

127           Obtain permission from abutting owners, including conditions for closing existing  
128 access. Submit copy of agreement with abutting owners before beginning work in  
129 the affected area.

129

130           When working on existing facility that will be kept open to traffic, provide  
131 smooth and even surface for public traffic use. Only work on a portion of roadway  
132 at one time, and stage construction from one side to other while routing traffic over  
133 opposite side.

134

135           During subgrade and paving operations, paved shoulders may be used for  
136 public traffic.

137

138           Do not store material or equipment where it will interfere with public traffic.  
139 Remove equipment and other obstructions out of right-of-way or clear zone to  
140 permit free and safe passage of public traffic during non-working hours or  
141 suspension of work. For storage of materials and equipment, see Subsection

105.23 – Storage and Handling of Materials and Equipment.

Notify Fire Department, in writing, at least 24 hours before blocking or closing road access. Keep fire hydrants accessible to Fire Department by not placing material or other obstructions within five feet of fire hydrant or closer than permitted by applicable ordinances, rules, and regulations.

Notify the Engineer and County, including Bus Systems Division, Police Department, Fire Department, Emergency Medical Services, and Department of Health in writing at least five days before start of construction.

**(A) Signs.** Install signs sufficiently ahead of location where operations may interfere with use of road by traffic and at intermediate points where new work crosses or coincides with existing road.

Place signs in accordance with TCP as accepted by the Engineer

**(B) Barricades**

**(1) General.** Provide, erect, and maintain necessary barricades suitable for protection of work and safety of the public.

Barricades shall be in good condition. Barricade application and installation shall be in accordance with accepted TCP.

Provide sand bags if required or ordered by the Engineer. Sand bags and installation method shall comply with *MUTCD* and be accepted by the Engineer prior to use. Do not place sand bags on striped barricade rail.

During hours of darkness, install steady burn or flashing lamps on barricades selected by the Engineer. Attach lamps on barricade ends closest to traveled way and visible to oncoming traffic.

Do not install signs on barricades unless signs and barricades have been crash tested as a unit and accepted under NCHRP Report 350.

**(2) Retroreflectorization.** Retroreflectorize barricade rails and attachment with retroreflective sheeting in accordance with Subsection 712.20(E) - Retroreflective Sheeting Material or Subsection 712.20(D)(3) - Hardened Aluminum-Backed Retroreflective Sheeting.

Retroreflectorize both vertical faces of each barricade rail.

**(3) Color.** Provide white colored rails, frames, and braces with

front and back rail faces having 6-inch-wide alternating orange or red and white stripes sloping downward toward traveled way at angle of 45 degrees from vertical. Use stripe colors in accordance with the following:

(a) Use orange and white stripes for the following conditions:

1. Construction work.
2. Detours.
3. Maintenance work.

(b) Use red and white stripes for the following conditions:

1. On roadways with no outlet, such as dead-ends and cul-de-sacs.
2. Ramps or lanes closed for operational purposes.
3. Permanent or semi-permanent closure or termination of roadway.

**(4) Maintenance.** Keep barricades in good condition. Repair, repaint, clean, or replace barricades to maintain effectiveness and appearance. Immediately replace missing or damaged barricades, lamps, sandbags, and other accepted weights.

Clean and repair barricades before relocating to other locations.

**(C) Traffic Delineators.** Install traffic delineators in accordance with accepted TCP.

Maintain traffic delineators in good condition. Immediately replace missing or damaged traffic delineators.

Clean delineator prior to relocating to new location.

**(D) Cones.** Install traffic cones in accordance with accepted TCP.

Maintain traffic cones. Keep traffic cones clean and in good repair. Immediately replace lost, stolen, or damaged traffic cones.

Clean cones prior to relocating to new location.

**(E) Lane Closures.** Lane closures will be allowed only from 8:30 a.m. to 3:30 p.m., Monday through Friday. Exceptions to lane closure hours specified require written acceptance by the Engineer. No increase in contract price or contract time will be given for lane closure restrictions specified.

For island of Oahu, no lane closures will be allowed during 24-hour periods as follows:

(1) Day preceding holiday (3:30 p.m. to Midnight), except as otherwise specified.

(2) Holidays (Midnight to Midnight).

(3) Day before and day after Thanksgiving Day (Midnight to Midnight).

(4) Three-week holiday period for Christmas and New Years (Midnight to Midnight).

(5) Three-week "Beat-the-School-Jam" period, to be determined, (Midnight to Midnight) beginning approximately third week of August.

(6) Other dates of events indicated in the contract documents.

No time extension will be given for the above restrictions. The contract time for the project has accounted for any loss of time due to the above restrictions.

Closure of only one lane of traffic will be allowed during lane-closure hours. Keep lanes open to traffic and allow flow at normal posted speed limit during non-lane-closure hours.

If applicable, coordinate lane closures with adjacent project(s) at no increase in contract price or contract time.

Rental fees will be assessed in accordance with Subsection 108.10 – Rental Fees for Unauthorized Lane Closure or Occupancy, for failure to open lanes to traffic during peak hours. Morning and afternoon peak hours shall be from 5:30 a.m. to 8:30 a.m. and 3:30 p.m. to 6:30 p.m., respectively, Monday through Friday.

Before scheduling work, submit requests for detours and lane closures as follows:

(1) Detours - 8 weeks before implementing detours.

(2) Lane closures - 6 weeks before implementing lane closures.

Include the following with detour and lane closure requests:

(1) Explanation of proposed changes to existing traffic pattern.

(2) Installation schedule for informational and traffic control signs.

(3) Publication schedule for legal notices.

(4) Plan showing proposed informational signs.

(5) Plan showing lane changes or detours in accordance with accepted TCP, including details at beginning of multi-lane highway lane changes and detours.

Detours or lane closures will not be allowed before the Engineer accepts detour or lane closure request.

**TABLE 645-I - FOR TRAFFIC CONTROL PLAN**

POSTED SPEED LIMIT (M.P.H.)	SIGN SPACING (D) (FEET)	TAPER LENGTH (T) (FEET)		LONGI- TUDINAL BUFFER SPACE (B) (FEET)	SPACING OF CONES OR DELINEATORS (FEET)		
		W = 12' OR * LESS	W = GREATER * THAN 12'		TAPER	TANGEN T	WORK AREA
20	250	200	W x 17	35	20	20	10
25	250	200	W x 17	55	25	25	10
30	250	250	W x 20	85	30	30	10
35	250	250	W x 20	120	35	35	10
40	500	350	W x 30	170	40	40	10
45	500	550	W x 45	220	45	45	10
50	1000	600	W x 50	280	50	50	10
55	1000	700	W x 55	335	55	55	10

\* W = width of lane or shoulder

(F) **Advisory Signs.** Submit advisory sign shop drawings. Construct, install, maintain, and remove two advisory signs as ordered by the Engineer. Place signs at locations designated by the Engineer. Provide signs, minimum 8 feet wide by 4 feet high, with black letters on orange background, and with three 4.00 pounds/foot flanged channel posts for each sign.

Include starting date and hours of construction in sign message. Use letter heights of 8 inches, Series D. The Engineer will review and accept advisory signs' wording before fabrication. Install advisory signs two weeks before start of construction. Remove advisory signs immediately after

construction has been completed or as ordered by the Engineer.

**(F) Advertisement.** Place advertisement in newspaper, as ordered by Engineer, for the following traffic pattern changes or night work:

- (1) Detours.
- (2) Lane closure.
- (3) Permanent road closure.
- (4) Permanent new route that changes previous route.

Include the following information:

- (1) Map of traffic pattern change limits.
- (2) Map showing lane(s) closure and detour pattern.
- (3) Notice of starting and ending dates and duration.
- (4) Explanation of lane(s) closure or detours in "Notice To Motorist".

Quality of map shall conform to the following requirements:

- (1) No freehand printing or penciling.
- (2) Highlight important features by darkening, cross-hatching, crossing-out, or coloring important words, as necessary.
- (3) Provide maps with minimum size of five columns wide and four columns deep. Lesser width columns may be considered to balance against size of drawing.
- (4) Text specifications.
  - (a) Work being featured - 3/16-inch text.
  - (b) Major roads and features - 1/8-inch text.
  - (c) Other roads and features- first letter of sentence upper case.
  - (d) "NOTICE TO MOTORIST" in upper case.
  - (e) Message - first letter of sentence upper case.



- 360 (5) Line Thickness.  
361  
362 (a) Important feature being advertised - line thicker than  
363 rest of map.  
364  
365 (b) Directional arrow - bolder than rest of lines shown on  
366 map, when important, to show route traffic should use.  
367  
368 (6) Show reference direction such as "TO HONOLULU" with  
369 arrow.  
370

371 Submit the following:  
372

- 373 (1) "Notice to Motorists" before placement in newspaper, six  
374 weeks before start of work.  
375  
376 (2) Actual size of notice to be published in newspaper. The  
377 Engineer will not allow size reduction of notices once accepted.  
378 Submit final, camera-ready "Notice to Motorists" advertisement.  
379

380 Place advertisement for three consecutive days and within one week  
381 before traffic pattern changes, in publication as ordered by the Engineer.  
382

383 **645.04 Measurement.**  
384

385 (A) Traffic control as specified in Subsection 645.03 - Construction will be  
386 measured on a contract lump sum basis. Measurement for payment will  
387 not apply.  
388

389 (B) The Engineer will measure additional police officers, additional traffic  
390 control devices, and advertisement, if ordered by the Engineer, on a force  
391 account basis, in accordance with Subsection 109.06 - Force Account  
392 Provisions and Compensation.  
393

394 **645.05 Payment.** The Engineer will pay for the accepted traffic control,  
395 additional police officers, additional traffic control devices, and advertisement at the  
396 contract price per pay unit, as shown in the proposal schedule. Payment will be  
397 full compensation for the work prescribed in this section and the contract  
398 documents.  
399

400 The Engineer will pay for the following pay items when included in the  
401 proposal schedule:  
402

403 Pay Item	Pay Unit
404	
405 Traffic Control	Lump Sum
406	

407 Additional Police Officers, Additional Traffic Control Devices,  
408 And Advertisement Force Account  
409

410 An estimated amount for the force account may be allocated in the proposal  
411 schedule under "Additional Police Officers And Additional Traffic Control Devices",  
412 but the actual amount to be paid will be the sum shown on the accepted force  
413 account records, whether this sum is more or less than the estimated amount  
414 allocated in the proposal schedule.  
415


416 The Engineer will not pay for request submittals. The Engineer will not  
417 consider claims for additional compensation of late submittals or requests by  
418 Contractor.  
419

420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432

433  
434  
435  
436

50B-01-06M  
645-11a


2/10/05

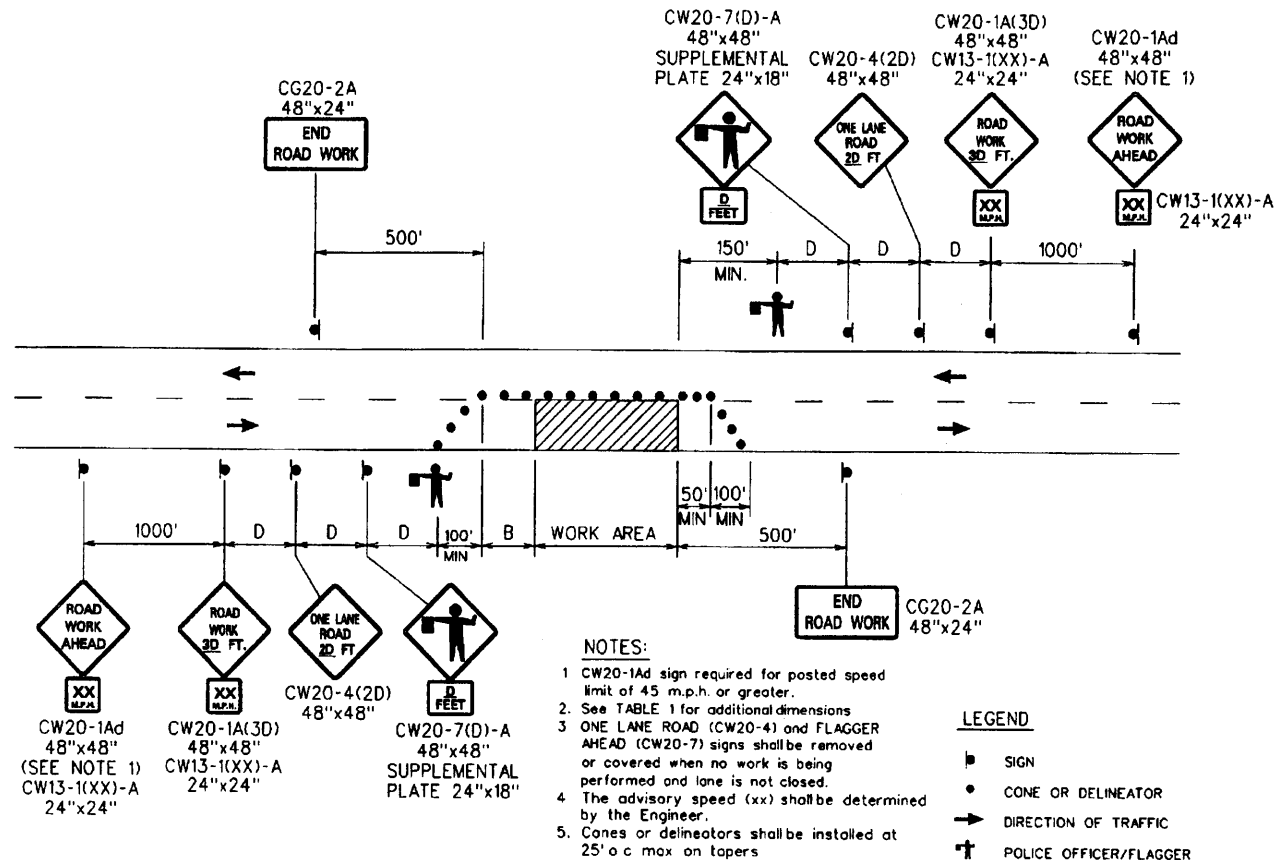

TWO-LANE HIGHWAY - ONE LANE CLOSED  
FIGURE 1 - TRAFFIC CONTROL PLAN

437  
438  
439  
440

50B-01-06M  
645-12a

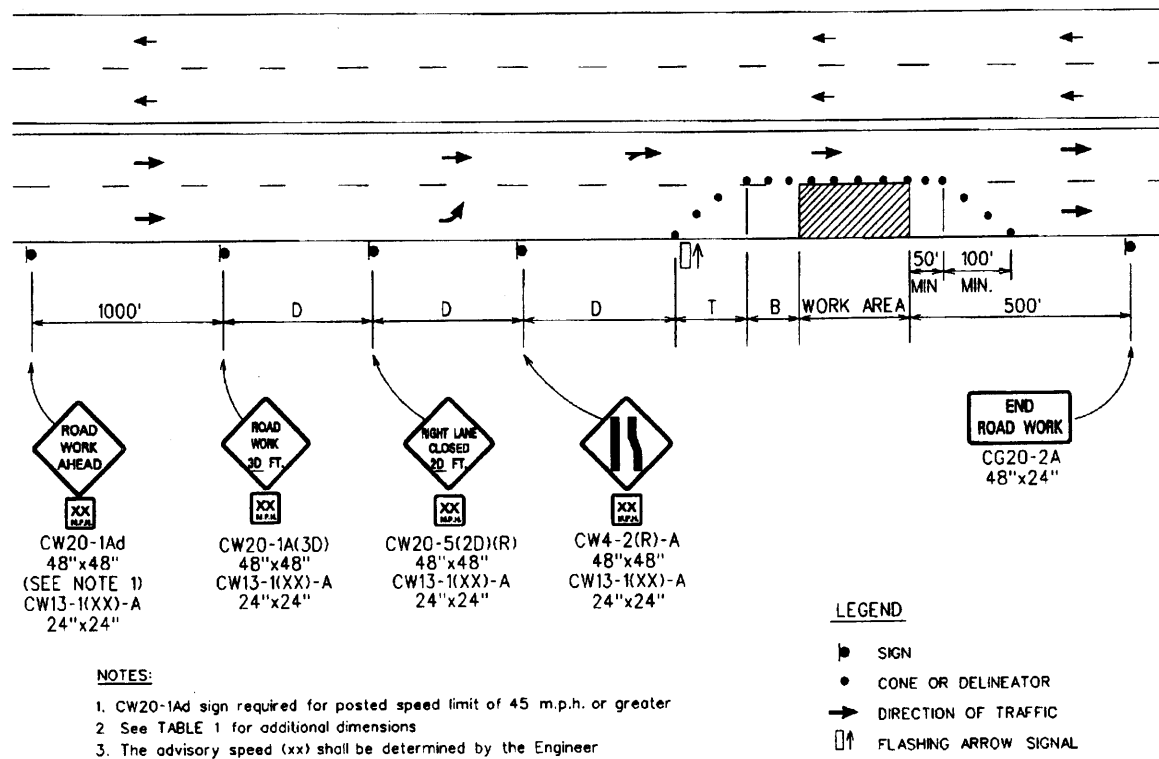


## MULTILANE UNDIVIDED HIGHWAY - RIGHT LANE CLOSED

FIGURE 2 - TRAFFIC CONTROL PLAN


441  
442  
443  
444

50B-01-06M  
645-13a

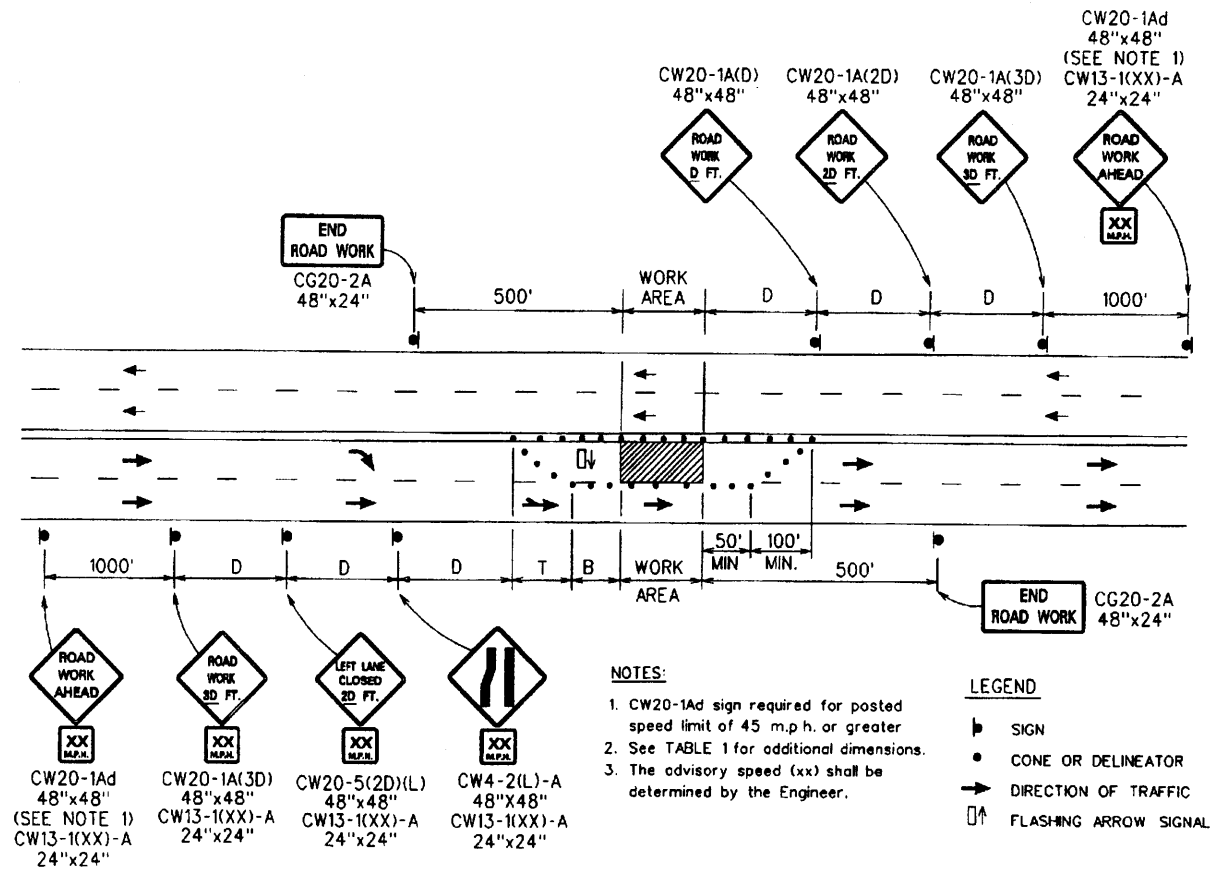

# MULTILANE UNDIVIDED HIGHWAY - LEFT LANE CLOSED


FIGURE 3 - TRAFFIC CONTROL PLAN

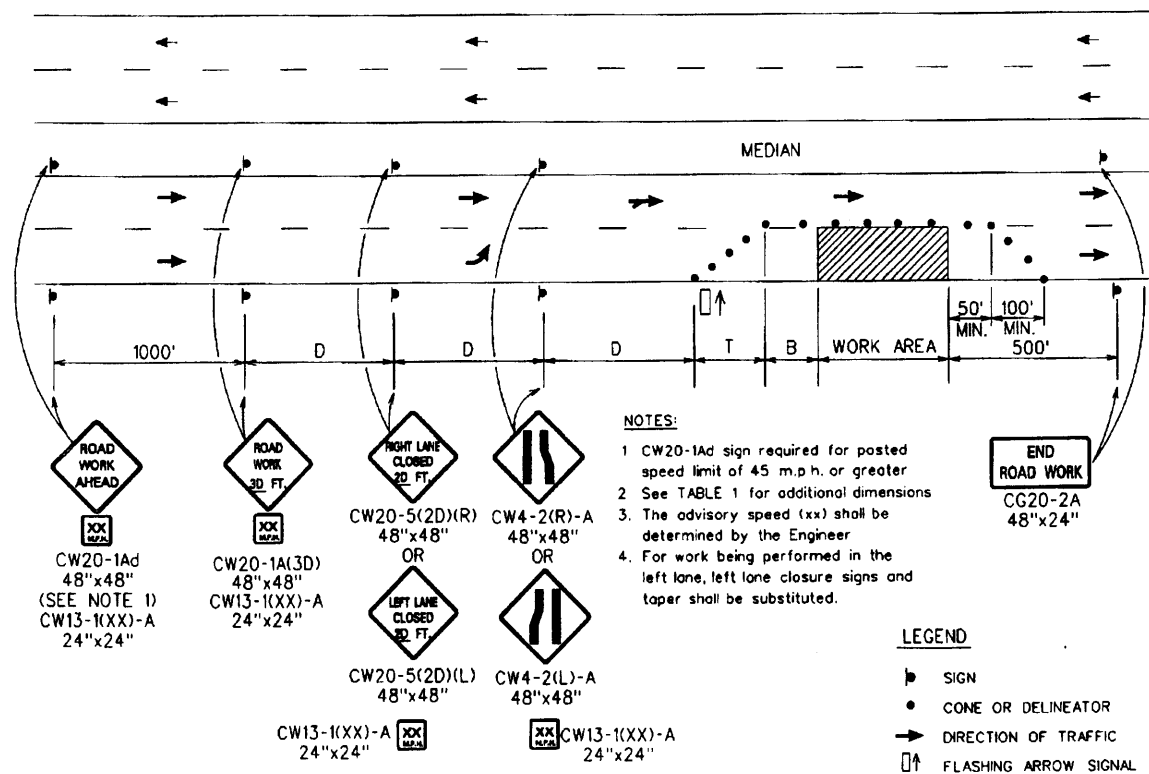

MULTILANE DIVIDED HIGHWAY - ONE LANE CLOSED  
FIGURE 4 - TRAFFIC CONTROL PLAN

449  
450  
451

50B-01-06M  
645-15a

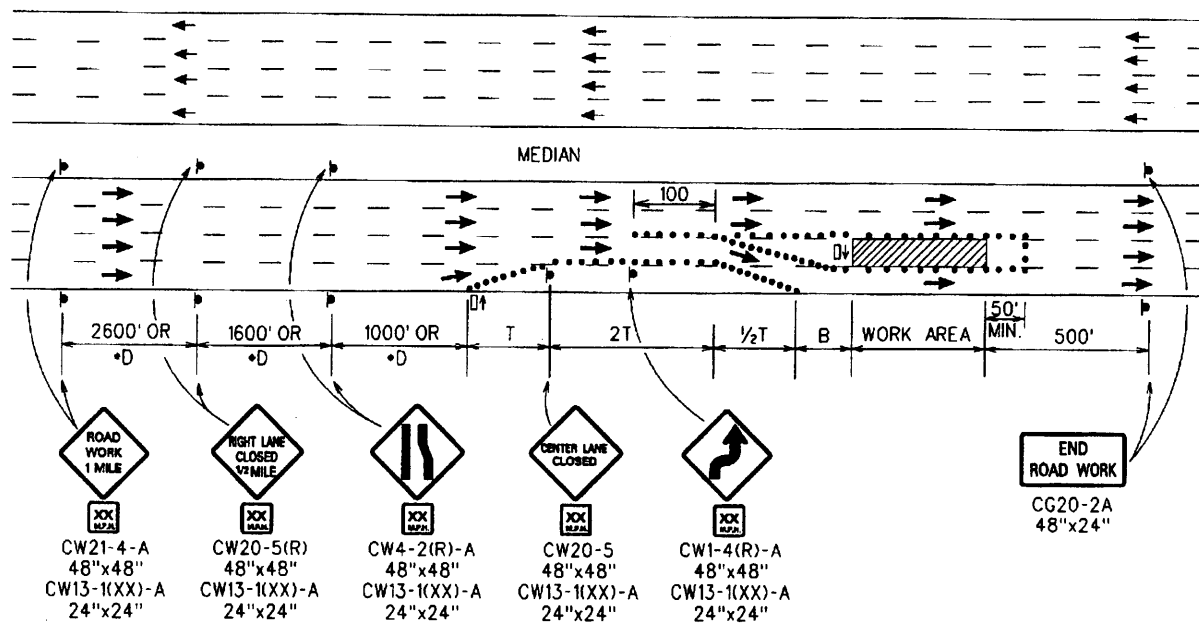

NOTES:

- For work being performed in the left center lane, use mirror image of above with appropriate left lane closure signs and taper
- For undivided highways, delete advance warning signs shown posted in median area
- The advisory speed (xx) shall be determined by the Engineer
- See TABLE 1 for additional dimensions.
- For posted speeds of 40 m.p.h. or less, use sign spacings and taper lengths from TABLE 1 and change signs CW21-4-A and CW20-5(R) to CW20-1A(3D) and CW20-5(2D)(R) as shown in Figure 4


MULTILANE HIGHWAY - CENTER LANE CLOSED

FIGURE 5 - TRAFFIC CONTROL PLAN

2/10/05

452  
453  
454

50B-01-06M  
645-16a

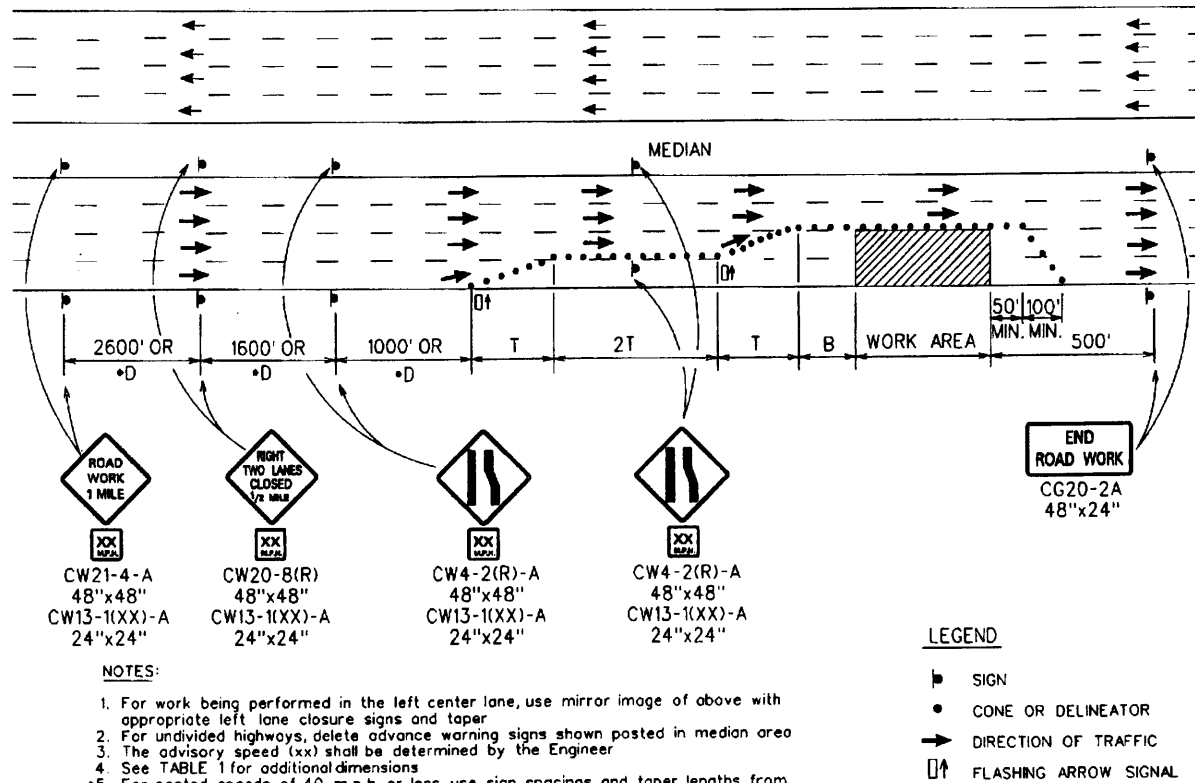

## MULTILANE HIGHWAY - MULTIPLE LANE CLOSED


FIGURE 6 - TRAFFIC CONTROL PLAN



455  
456

# END OF SECTION 645

50B-01-06M  
645-17a

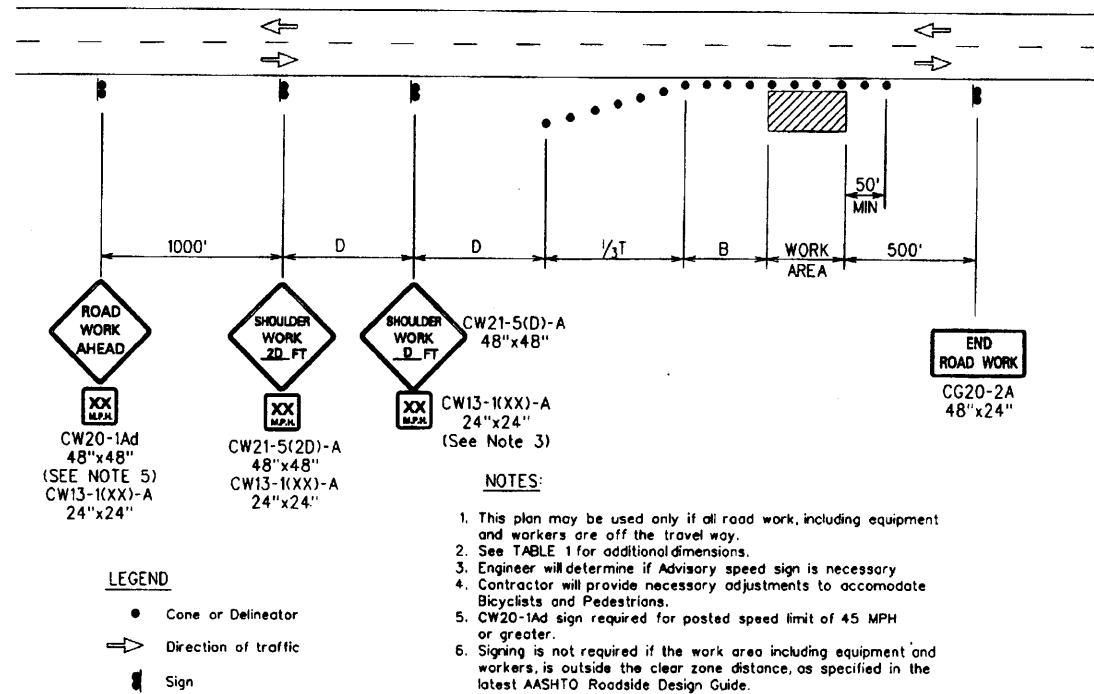

WORKING ON SHOULDER OR ROADSIDE  
FIGURE 7 - TRAFFIC CONTROL PLAN