


CONSTRUCTION SIGN PLAN

Not to Scale

CONSTRUCTION SIGN SCHEDULE					
ROAD AND LOCATION *	ROUTE 19G CENTERLINE STATION **	LEFT	RIGHT	ITEM NO. 621.7121 (NO POSTS)	ITEM NO. 621.7120 (TWO POSTS)
Hawaii Belt Road	100+50		•	CW13-1 (35)	CG20-1d
	101+00	•			CG20-1 (5)
	101+00		•		CG20-2
Side Road	1+00	•			CG20-1d
	1+00		•		CG20-2
Hawaii Belt Road	16+05.30	•			CG20-1 (5)
,	16+05.30		•		CG20-2
	16+55.30	•		CW13-1 (35)	CG20-1d
Total Construction Signs			2	8	

- * Final Locations of All Signs to be Determined in the Field by the Engineer.
- ** Signs Erected on Side Roads Must be Located 50' (Min.), From E.P. of Hawaii Belt Road.




STATE OF HAWAII

DEPARTMENT OF TRANSPORTATION

HIGHWAYS DIVISION CONSTRUCTION SIGN PLAN & SCHEDULE HAWAII BELT ROAD RESURFACING
Vicinity of Kahawailiilii Bridge to East Paauilo Bridge
Project No. 19G-01-99M

Scale: As Shown Date: May, 1999 SHEET No. 1

OF 1 SHEETS

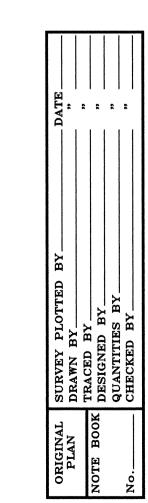

55