@ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)

<u>LEGEND</u>


H.


SURVEY PLOTTE
DRAWN BY
TRACED BY
DESIGNED BY
QUANTITIES BY
CHECKED BY

<u>NOTES</u>

- 1. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
- 2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
- 3. Raised pavement markers shall not be installed within crosswalks.
- 4. Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
- 5. All pavement striping shall be as noted on the legend or plans, or as directed by the Engineer.
- 6. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
- 7. The Contractor shall obtain blue raised pavement markers from County of Hawaii Fire Department and install them at the direction of the Engineer. The cost of installing the markers shall be incidental to other Contract Items.

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19G-01-99M	1999	33	<i>55</i>

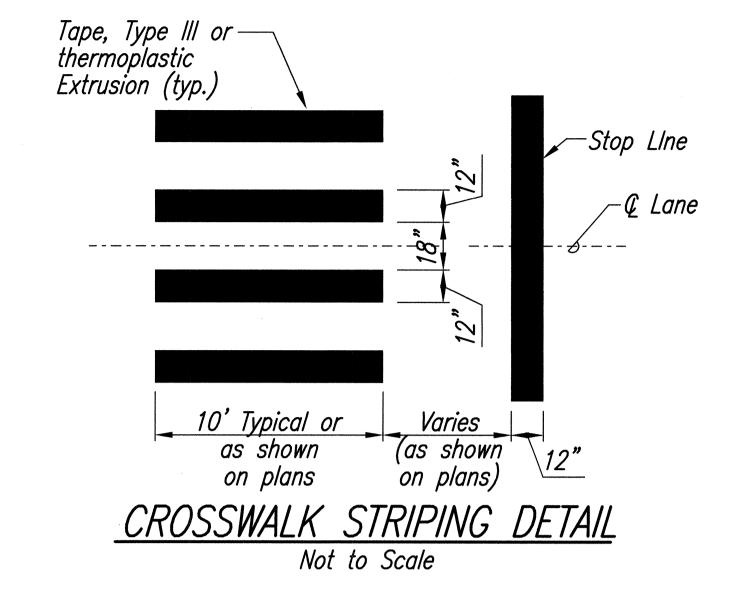



HIGHWAYS DIVISION PAVEMENT MARKING LEGEND & NOTES HAWAII BELT ROAD RESURFACING <u>Vicinity of Kahawailiilii Bridge to East Paauilo Bridge</u>

Project No. 19G-01-99M Scale: None

SHEET No.

STATE OF HAWA!

DEPARTMENT OF TRANSPORTATION

Date: May, 1999 **OF** 1 SHEETS

Wan y Somta