


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	19J-01-03M	2003	24	24

CONSTRUCTION SIGN SCHEDULE					
LOCATION *	STATION			ITEM No.	ITEM No.
		Left	Right	62I.7I2I (no posts)	62I.7I20 (two posts)
SDR 3(2)	87+25		●		CW20-1Ad
	92+25	●			CG20-2A
	104+25		●		CG20-2A
	109+25	●			CW20-1Ad
	120+25		●		CW20-1Ad
	125+25	●			CG20-2A
	135+45		●		CG20-2A
	140+45	●			CW20-1Ad
	158+50		●		CW20-1Ad
	163+50	●			CG20-2A
	75+58.63		●		CG20-2A
	80+58.63	●			CW20-1Ad
A-220-01-64	06+00	●			CW20-1Ad
	06+00		●		CG20-2A
Total Construction Signs					14

- NOTES:
- CW20-1Ad signs shall read "ROAD WORK AHEAD".
 - CG20-2A signs shall read "END ROAD WORK".

* Final locations of all signs to be determined in the field by the Engineer.

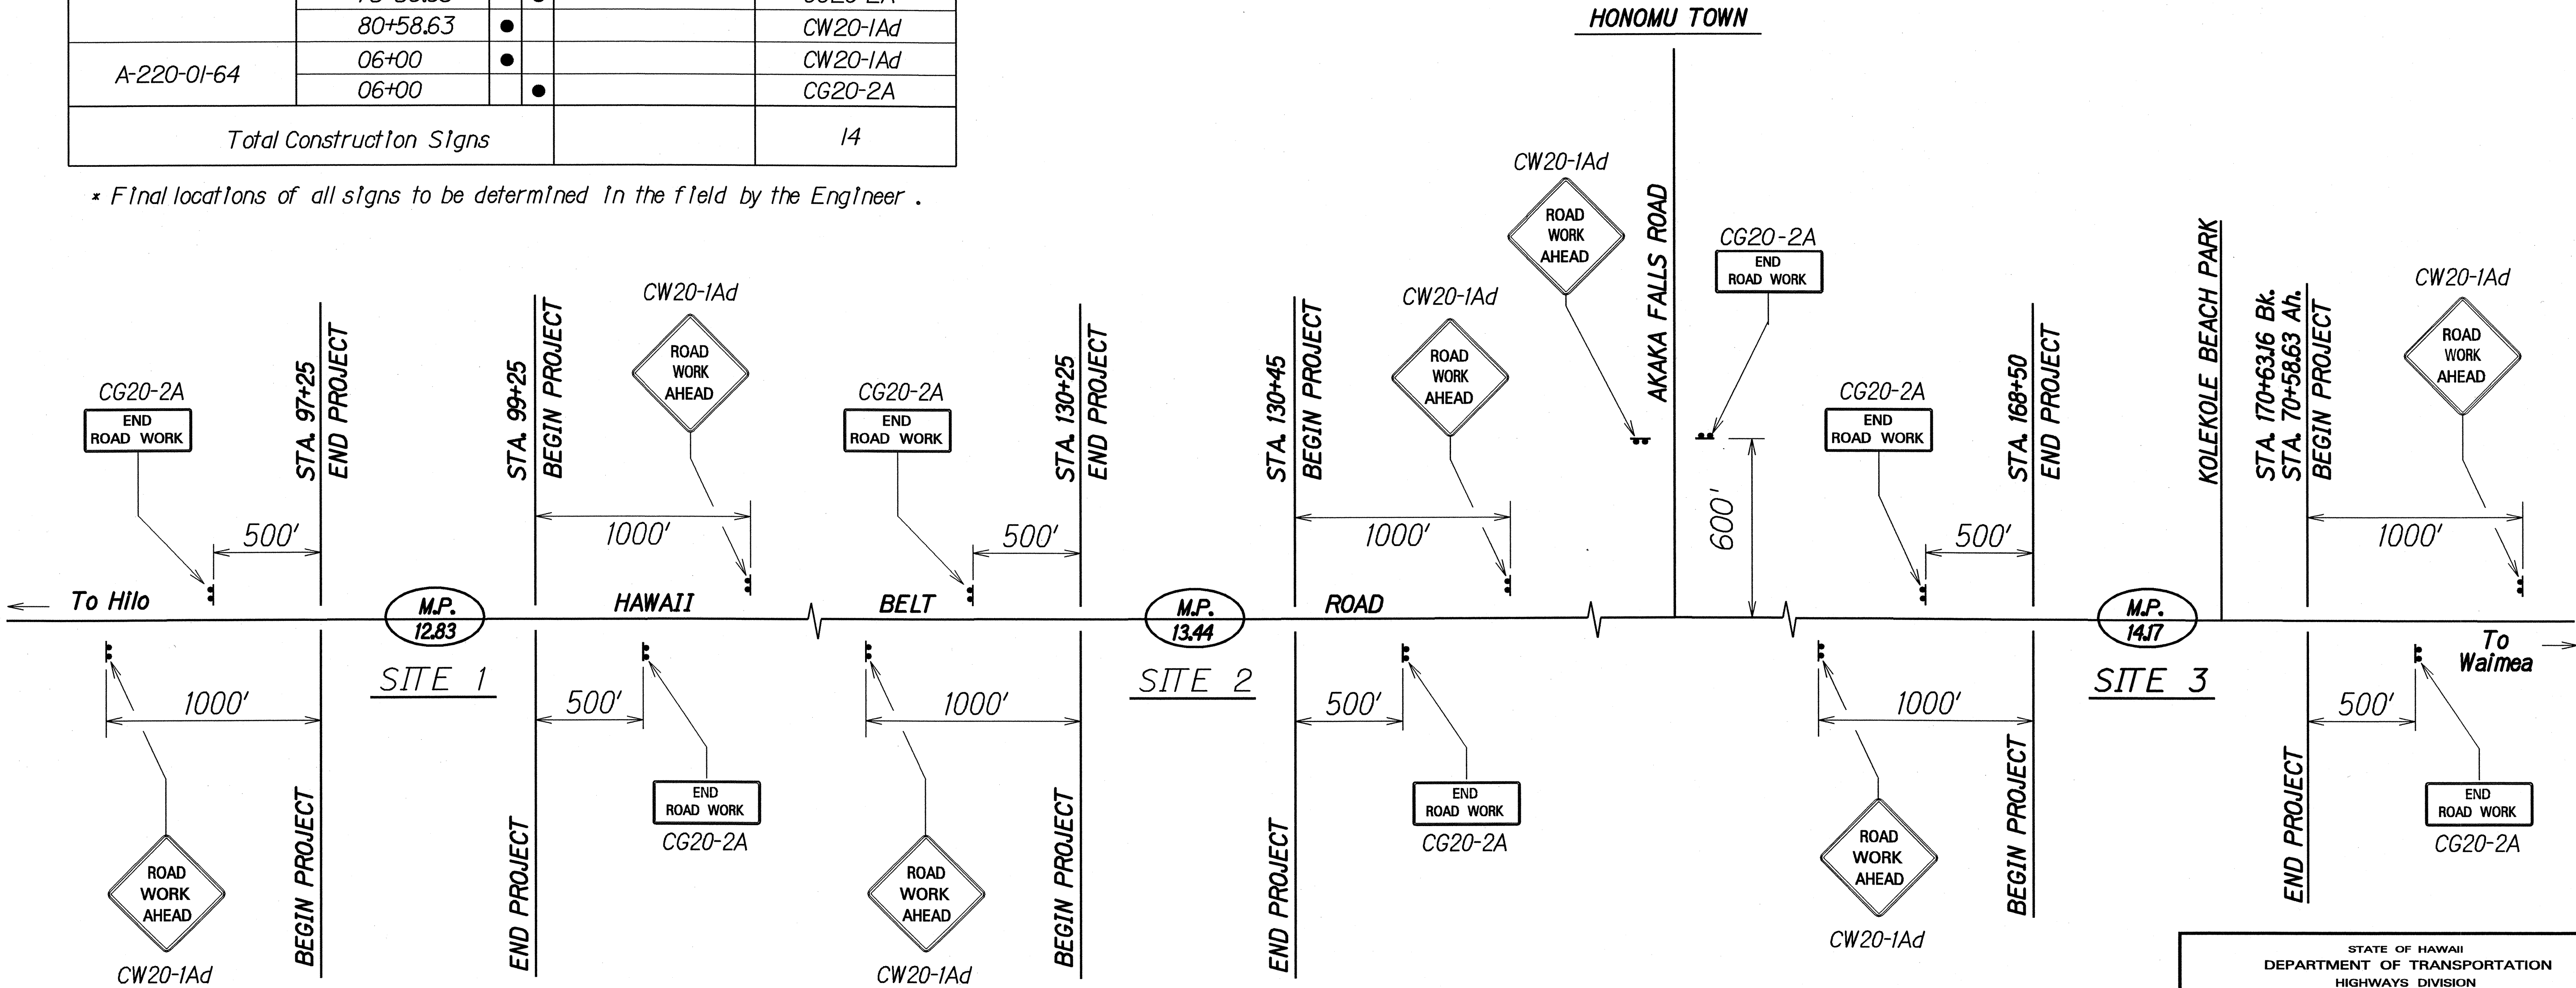

SURVEY PLOTTED BY	DATE
DRAWN BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	

CONSTRUCTION SIGN PLAN
Not To Scale

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**CONSTRUCTION SIGN
PLAN & SCHEDULE**
HAWAII BELT ROAD, FLOOD DAMAGE
REPAIRS VICINITY OF HONOMU
PROJECT NO. 19J-01-03M
Scale: As Shown Date: April, 2003
SHEET No. 1 OF 1 SHEETS