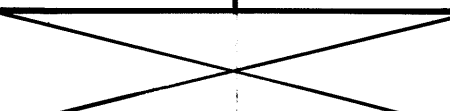


CENTERLINE & REFERENCE SURVEY MONUMENT SCHEDULE

STATION	ADJUST EXISTING (Item No. 613.0110)	* RECONSTRUCT (Item No. 613.0120)	± OFFSET (FT.)	EXIST. DEPTH (FT.)
P.O.T. 29+39		1	0	—
P.C. 70+04.68	1		0	0.15 +0.12
± Mon. 72+88	1		0	0.1 +0.12
P.T. 81+04.68	1		0.5 Rt.	0.1 +0.12
P.C. 108+63.81	1		0	0.1 +0.12
P.T. 124+13.81	1		0.25 Lt.	0.16 +0.12
± Mon. 129+91.58	±	1	0.9 Lt.	0.16 +0.0
P.C. 161+55.87	±	1	0.8 Lt.	0.17 +0.0
P.T. 166+40.52		1	0.6 Rt.	0.25 +0.0
P.C. 176+50.83		1	1.6 Lt.	0.27 +0.0
P.T. 179+80.97		1	0.5 Rt.	0.23 +0.0
P.C. 188+70.73	1		0	0.0
P.C. 205 + 24.01		1	0.1 Lt.	0.0
P.T. 209 + 29.52		1	0	0.0
P.T. 227 + 28.09		1	0	0.0
P.C. 229 + 65.63		1	0	0.0
P.T. 235 + 49.27		1	0	0.0
TOTALS	68 Each	104 Each		

* Remove existing ϵ monument. Refer to Standard Plan D-06 for details of new ϵ monument installation.

ROUTE MARKER SCHEDULE

ROUTE MARKER SCHEDULE						
STATION	LEFT	RIGHT	SIGN NO.	REMOVE	INSTALL	
					TYPE-A ASSEMBLY	
71+86	•		MI-6 (130)	1	1	
74+50		•	MI-6 (130)		1	
KAMAILI ST.						
0+85	•		MI-6 (130), Me-4	1	1	
TOTALS				2 Each	3 Each	—

MILEPOST MARKER SCHEDULE

MILEPOST MARKER SCHEDULE				
STATION	LEFT	MILE POST NO. (ROUTE NO.)	REMOVE	INSTALL
				QUANTITY w/POST (BI-DIRECTIONAL)
36+77	•	16 (130)	1	1
89+48	•	15 (130)	1	1
142+29	•	14 (130)	1	1
195+00	•	13 (130)	1	1
247+70	•	12 (130)	-	1
TOTALS			4 Each	5 Each

REFLECTOR MARKER SCHEDULE


STATION		LEFT	RIGHT	* RM-2 w/POST	RM-3 w/POST		RM-3 (BI-DIR)	RM(BI-DIR) w/POST		REMARKS
FROM	TO				FLEX	STEEL	FLEX	w/o POST	STEEL	
	1+69		•					1		on sign post
27	11+50	20+00	•				5			
22	12+50	19+50	•				4			
	30+00	32+00	•				2			
22	30+00	32+00		•			2			
28	55+00	66+00		•			6			
	57+30		•				1			
	60+80		•				1			
	73+09			•				1		on sign post
	85+00	87+00		•			2			
	85+50		•				1			
	89+00		•				1			
	105+40	110+00		•			3			
	112+50			•			1			
	113+99			•				1		on sign post
	114+50	120+50		•		4				
	122+03			•			1			@ guardrail
	123+85			•					* RM-2/3	@ guardrail
	129+32		•					1		on sign post
	133+50	136+50	•				3			
	133+50	136+17		•			3			
	142+30	146+50		•			3			
	142+95	146+43	•				3			
	153+90	156+00	•				2			
	156+09			•			1			
	164+20	166+40		•			3			
	169+62			•				1		on sign post
	171+00	173+80		•			3			
	171+40	173+20	•				2			
	180+83	182+92	•				2			
	181+07	184+91		•			3			
	196+00	198+00	•				2			
	197+10	206+25		•			5			
	200+80		•				1			
	203+80	205+94	•				3			
	212+00	216+00	•				3			
	214+00	217+40		•			3			
	222+30			•			1			
	228+00		•				1			
	230+50		•				1			
TOTALS				—	4 Ea.	1 Ea.	77 Ea.	5 Ea.	1 Ea.	—

* All RM-2's shall be white.

SIGN SCHEDULE

STATION	LEFT	RIGHT	TYPE	REMOVE	INSTALL			
					10 SQ. FT. or LESS		GREATER THAN 10 SQ. FT.	
					w/POST	w/o POST	w/POSTS	
1+69	•		R1-1	1	1			
64+20	•		R2-4(40)a 36"x48"	1			1	
67+13		•	W2-2	1	1			
67+13		•	KAMAILI ST. *			1		
69+13	•		R2-1(55)a 36"x48"	1			1	
73+09		•	R1-1	1	1			
77+15		•	R2-1(55)a 36"x48"	1			1	
78+91	•		W2-2	1	1			
78+91	•		KAMAILI ST. *			1		
82+00		•	R2-4(40)a 36"x48"	1			1	
84+55		•	SCENIC POINT →	1			1	
96+37	•		← SCENIC POINT	1			1	
113+99		•	R1-1	1	1			
129+32	•		R1-1	1	1			
161+72		•	W2-2	1	1			
161+72		•	(LEILANI ESTATES) *	1		1		
162+07	•		R2-4(40)a 36"x48"	1			1	
166+04	•		R2-1(55)a 36"x48"	1			1	
169+62		•	R1-1	1	1			
172+10		•	R2-1(55)a 36"x48"	1			1	
176+64	•		W2-2	1	1			
176+64	•		(LEILANI ESTATES) *	1		1		
177+03		•	R2-4(40)a 36"x48"	1			1	
256+64	•		R2-4(40)a 36"x48"	1			1	
261+83	•		R2-1(55)a 36"x48"	1			1	
KAMAILI ST.								
1+52	•		W1-4L	1	1			
2+16	•		W7-1	1	1	1		
TOTALS				25 Each	11 Each	5 Each	12 Each	-

* 30"x6" aluminum sign w/1" radius corners 3" high black letters (upper case helvetica, medium) on yellow reflective background.

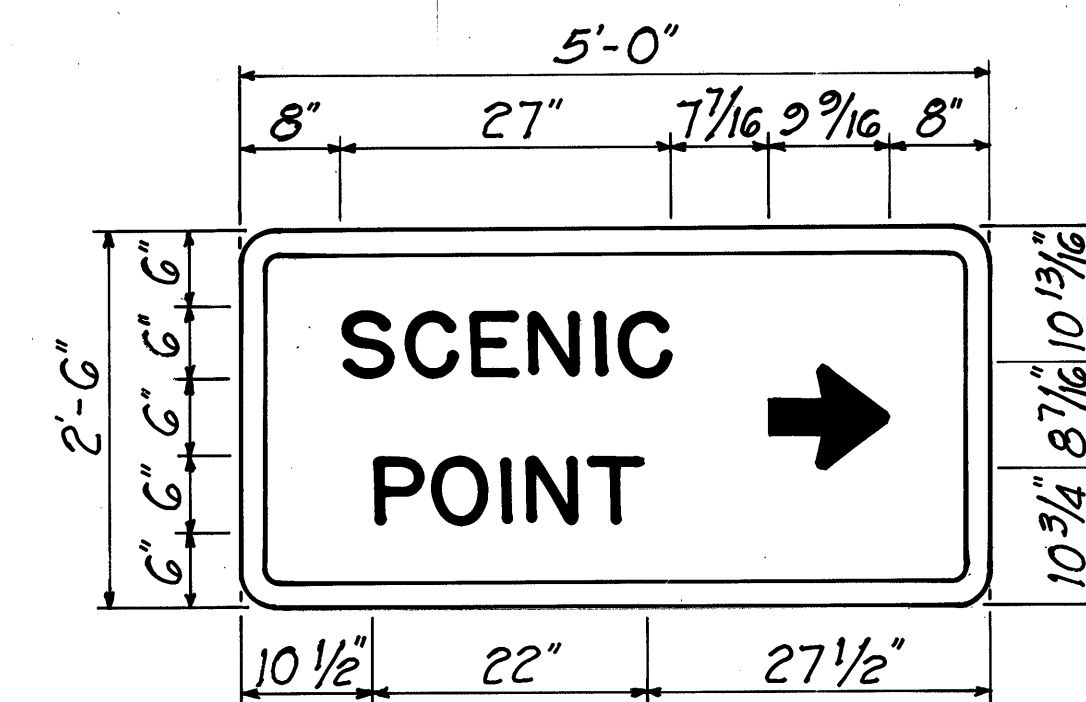

NOTE: All letters to be G" Series "D".
Letters to be white on blue
background.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

MISCELLANEOUS SCHEDULES

PAHOA-KALAPANA ROAD RESURFACING
PROJ. No. 130A-01-92M
PUNA, HAWAII

Date: _____

SHEET No. 1 OF 1 SHEETS