

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	RS-0190(2)	1978	4	35

Sta. 244+00

26" Culvert
For plan & details of structures and culvert see sht. no. 8

CURVE DATA

$\Delta = 12^\circ 00' 20"$
 $D = 1^\circ 00'$
 $R = 5,720.58'$
 $T = 610.07'$
 $L_c = 1,215.56'$
 $E = 32.39'$
 $SE = 0.032'/ft.$

Sta. 243+00 to Sta. 258+00 Left

Relocate 1515 L.F. of 5-Strand Barbwire Fence outside of R/W and Control of Access Line

STA. 252+60 LEFT

Construct Smooth and Easy Riding A.C. Driveway with 12' wide G.I. Pipe Gate relocated from 246+17 Left

ESTIMATED QUANTITIES:

Exc. = 47 c.y.
 Agg. Base = 18 c.y.
 Pav't. Area = 145 s.y.

True North
 Scale: 1"=50'

Sta. 256+76

6'-4"x4'-9" Structural Plate Pipe
 For plan & details of structures and culvert, see sht. no. 9

Remove and Backfill Exist. 24" C.M.P. Culvert
 (Incidental to other contract items)

Remove Amber Reflectors (Incidental)

Sta. 256+00 Right

Install 25 L.F. of Metal Guard Rail Barricade w/2 End Flares And 2 RM-D w/ Post


Sta. 244+00 to Sta. 246+42 Right

Construct 3 Feet Wide Ditch

Estimated Quantities:
 Channel Exc. = 116 c.y.

Curve & 25 M.P.H. Sign

Existing Paved Road

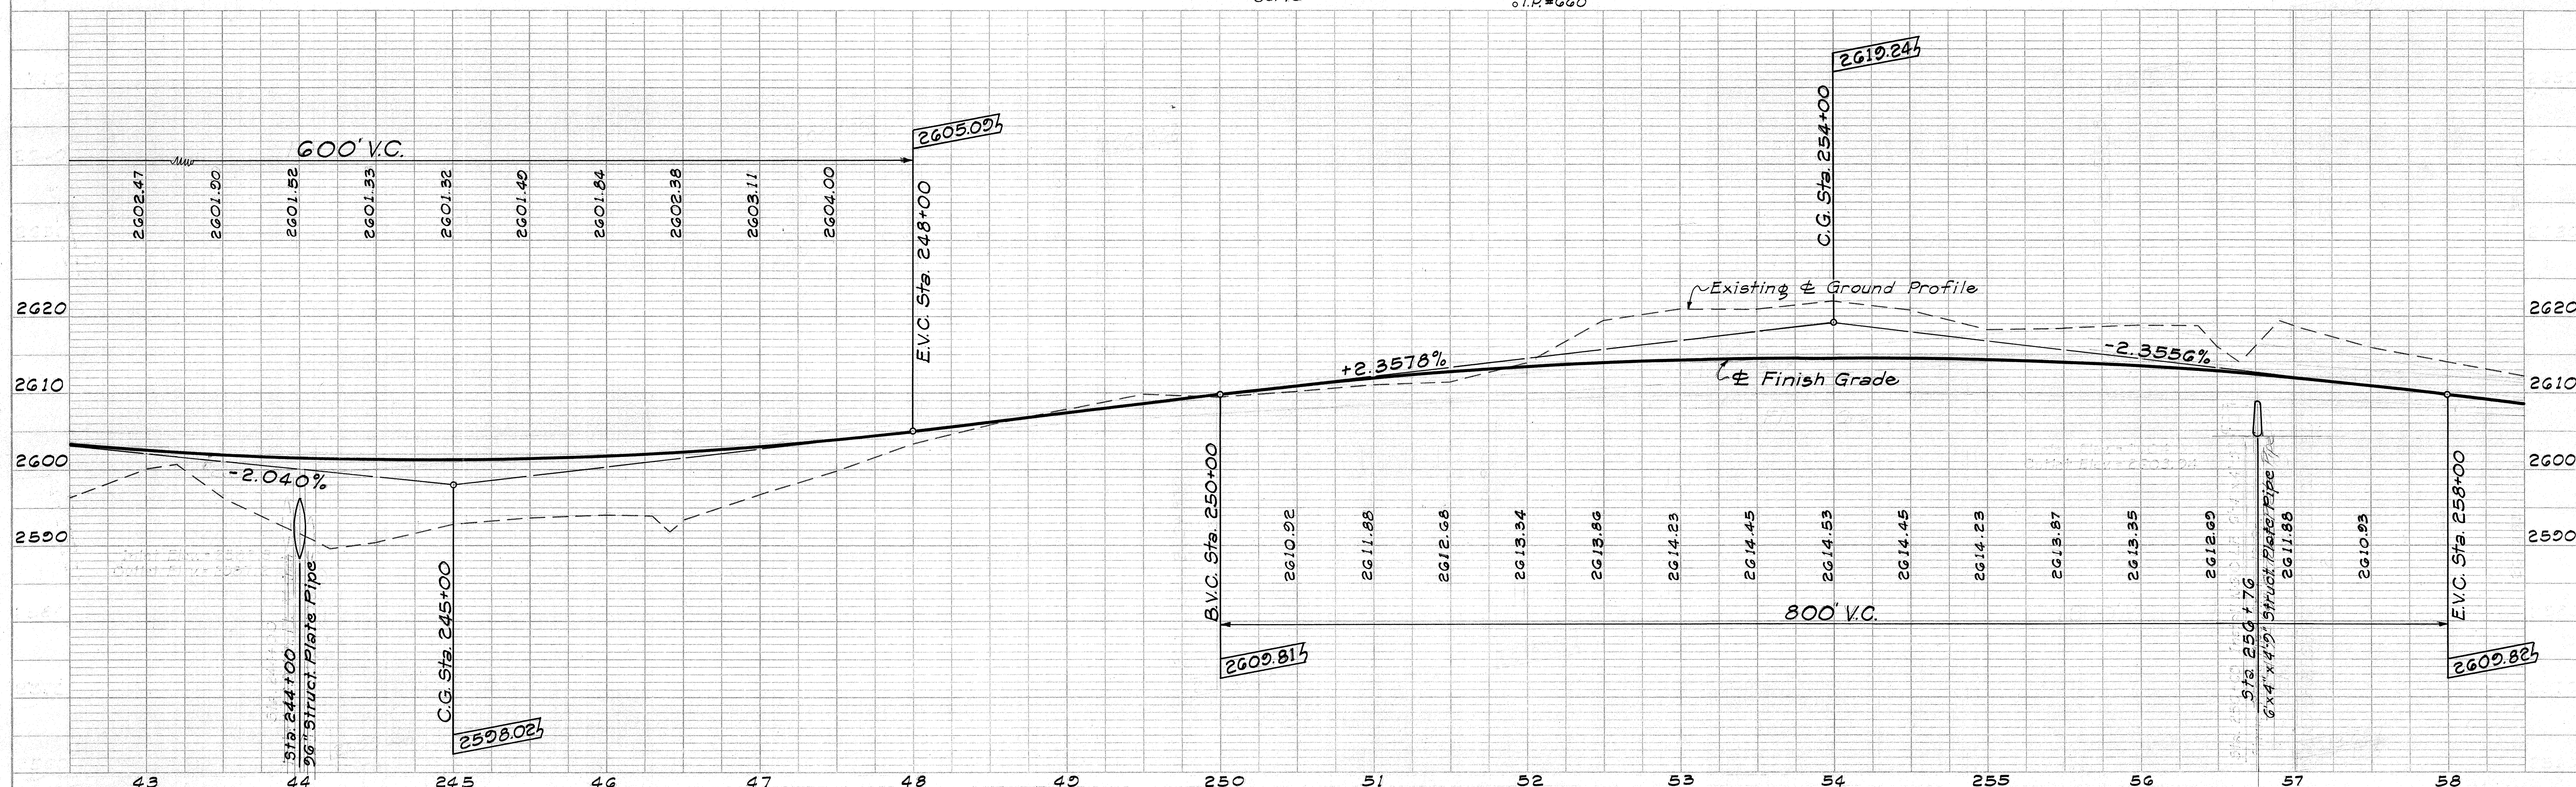

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	RS-0190(2)	1978	5	35

Sta. 258+00 to Sta. 272+00
Relocate 1445 L.F. of 5-Strand
Barbwire Fence outside of R/W
and Control of Access Line.

