

Amend **Section 645 – Traffic Control Devices** to read as follows:

"SECTION 645 - WORK ZONE TRAFFIC CONTROL

645.01 Description. This section describes the following:

(A) Furnishing, installing, maintaining and subsequently removing work zone traffic control devices, and personnel. Work zone traffic control shall include providing flaggers and police officers.

(B) Keeping roads for public traffic open and in passable condition; providing and maintaining temporary access crossings for trails, businesses, parking lots, garages, residences, farms, parks, and other driveways; taking necessary work precautions for the protection, safety, and convenience of the public; should pedestrian facilities exist, taking necessary measures for safe and accessible passage, with route information and ADAAG compliance, for pedestrians traveling through or near work zone.

(C) Taking safety and precautionary measures, such as illuminating roadway obstructions during hours of darkness, in accordance with Chapter 286, HRS; Title 19, Subtitle 5, Chapters 127, 128, and 129, HAR; and *MUTCD*.

645.02 Materials.

| | |
|---------------------------------|--------|
| Signs | 712.20 |
| Reflector Marker | 712.21 |
| Traffic Delineators | 712.46 |
| Preformed Pavement Marking Tape | 712.53 |
| Sign Posts | 713.11 |
| Fasteners for Signs | 713.12 |

Submit 10 sets of FHWA approval letters certifying compliance with NCHRP Report 350 for signs, sign supports, barricades, delineators, cones, vertical panels, and other traffic control devices. Use of signs, sign supports, barricades, delineators, cones, vertical panels, and other traffic control devices that are not certified to be NCHRP Report 350 compliant will not be allowed.

Upon request of the Engineer, furnish self-certified NCHRP Report 350 compliant letter from vendor for each type of Category 1 traffic control device, as defined in NCHRP Report 350, including single-piece traffic cone, single-piece drum, tubular marker, and delineator.

48 Traffic control devices, including signs, barricades, warning lights, arrow
49 boards, changeable message signs, cones, delineators, and markers, shall conform
50 to the American Traffic Safety Services Association (ATSSA), *Quality Standards for*
51 *Work Zone Traffic Control Devices* and *MUTCD*.

52
53 Protective devices including barricades, warning signs, lights, and temporary
54 signals shall conform to Title 19, Subtitle 5, Chapters 127, 128, and 129, HAR.
55 Reflectorization for protective devices such as barricades, delineators, and warning
56 signs shall conform to Subsection 712.20 – Signs.

57
58 **645.03 Construction.** Furnish, install, and maintain barricades, signs, cones,
59 delineators, lights, flashing signals, and other traffic control devices

60
61 Furnish two police officers for each location that requires work zone traffic
62 control. If TCP is included in the contract documents, furnish number of police
63 officers indicated in TCP.

64
65 When directing traffic, flaggers or police officers, or both shall be in direct
66 communication with each other.

67
68 Submit TCP and schedule at least 15 working days before work starts.
69 Submit modifications and deviations from accepted TCP and schedule at least 15
70 working days before start of work requiring modification or deviation. Illegible TCP
71 will not be accepted.

72
73 Include the following in TCP and schedule:

74
75 (1) Signs (type, size, designation, and placement).

76
77 (2) Traffic movements shown by arrows.

78
79 (3) Positions of flaggers and police officers.

80
81 (4) Barricades, cones, delineators, and additional traffic control devices
82 and measures necessary for protection of work and public safety; and
83 placement, spacing, distances, and reference points for traffic control
84 devices.

85
86 (5) Layout, drawn to scale, of traffic control devices, including information
87 needed to layout TCP.

88
89 (6) Brief description of work.

90
91 (7) Dates of work.

92
93 (8) Times of day affected.

95 (9) Proposed public information sign.

96
97 (10) Proposed news release.

98
99 Place sign or device situated farthest upstream from work zone first. Then
100 place others progressively downstream toward work zone.

101
102 Extend cones or delineators to point where cones or delineators are visible to
103 approaching traffic.

104
105 For signs with messages on both faces, cover inapplicable message before
106 placement.

107
108 Keep barricades, construction and warning signs, and other traffic control
109 devices in good condition. Repair, clean, or replace barricades, signs, or other
110 devices as required to maintain effectiveness and appearance. The Engineer alone
111 will decide suitable condition of each barricade, sign, or other traffic control device.

112
113 Remove or cover regulatory and warning signs that conflict with TCP.
114 Restore signs upon completion of work or as ordered by the Engineer. Affix object
115 markers to post(s) of covered sign.

116
117 Promptly remove or cover construction and warning signs that are not
118 applicable or not in use.

119
120 Promptly remove traffic control devices that are no longer needed.

121
122 Remove traffic control devices in reverse order of installation, starting closest
123 to work zone and continuing away from work zone.

124
125 Maintain abutting owners' existing access until replacement access is usable.
126 Obtain permission from abutting owners, including conditions for closing existing
127 access. Submit copy of agreement with abutting owners before beginning work in
128 the affected area.

129
130 When working on existing facility that will be kept open to traffic, provide
131 smooth and even surface for public traffic use. Only work on a portion of roadway
132 at one time, and stage construction from one side to other while routing traffic over
133 opposite side.

134
135 During subgrade and paving operations, paved shoulders may be used for
136 public traffic.

137
138 Do not store material or equipment where it will interfere with public traffic.
139 Remove equipment and other obstructions out of right-of-way or clear zone to
140 permit free and safe passage of public traffic during non-working hours or
141 suspension of work. For storage of materials and equipment, see Subsection

105.23 – Storage and Handling of Materials and Equipment.

Notify Fire Department, in writing, at least 24 hours before blocking or closing road access. Keep fire hydrants accessible to Fire Department by not placing material or other obstructions within five feet of fire hydrant or closer than permitted by applicable ordinances, rules, and regulations.

Notify the Engineer and County, including Bus Systems Division, Police Department, Fire Department, Emergency Medical Services, and Department of Health in writing at least five days before start of construction.

(A) Signs. Install signs sufficiently ahead of location where operations may interfere with use of road by traffic and at intermediate points where new work crosses or coincides with existing road.

Place signs in accordance with TCP as accepted by the Engineer

(B) Barricades

(1) General. Provide, erect, and maintain necessary barricades suitable for protection of work and safety of the public.

Barricades shall be in good condition. Barricade application and installation shall be in accordance with accepted TCP.

Provide sand bags if required or ordered by the Engineer. Sand bags and installation method shall comply with *MUTCD* and be accepted by the Engineer prior to use. Do not place sand bags on striped barricade rail.

During hours of darkness, install steady burn or flashing lamps on barricades selected by the Engineer. Attach lamps on barricade ends closest to traveled way and visible to oncoming traffic.

Do not install signs on barricades unless signs and barricades have been crash tested as a unit and accepted under NCHRP Report 350.

(2) Retroreflectorization. Retroreflectorize barricade rails and attachment with retroreflective sheeting in accordance with Subsection 712.20(E) - Retroreflective Sheeting Material or Subsection 712.20(D)(3) - Hardened Aluminum-Backed Retroreflective Sheeting.

Retroreflectorize both vertical faces of each barricade rail.

(3) Color. Provide white colored rails, frames, and braces with

front and back rail faces having 6-inch-wide alternating orange or red and white stripes sloping downward toward traveled way at angle of 45 degrees from vertical. Use stripe colors in accordance with the following:

(a) Use orange and white stripes for the following conditions:

1. Construction work.
2. Detours.
3. Maintenance work.

(b) Use red and white stripes for the following conditions:

1. On roadways with no outlet, such as dead-ends and cul-de-sacs.
2. Ramps or lanes closed for operational purposes.
3. Permanent or semi-permanent closure or termination of roadway.

(4) **Maintenance.** Keep barricades in good condition. Repair, repaint, clean, or replace barricades to maintain effectiveness and appearance. Immediately replace missing or damaged barricades, lamps, sandbags, and other accepted weights.

Clean and repair barricades before relocating to other locations.

(C) **Traffic Delineators.** Install traffic delineators in accordance with accepted TCP.

Maintain traffic delineators in good condition. Immediately replace missing or damaged traffic delineators.

Clean delineator prior to relocating to new location.

(D) **Cones.** Install traffic cones in accordance with accepted TCP.

Maintain traffic cones. Keep traffic cones clean and in good repair. Immediately replace lost, stolen, or damaged traffic cones.

Clean cones prior to relocating to new location.

(E) **Lane Closures.** Lane closures will be allowed only from 8:30 a.m. to 3:00 p.m., Monday through Friday. Exceptions to lane closure hours specified require written acceptance by the Engineer. No increase in contract price or contract time will be given for lane closure restrictions specified.

For island of Oahu, no lane closures will be allowed during 24-hour periods as follows:

(1) Day preceding holiday (3:00 p.m. to Midnight), except as otherwise specified.

(2) Holidays (Midnight to Midnight).

(3) Day before and day after Thanksgiving Day (Midnight to Midnight).

(4) Three-week holiday period for Christmas and New Years (Midnight to Midnight).

(5) Three-week "Beat-the-School-Jam" period, to be determined, (Midnight to Midnight) beginning approximately third week of August.

(6) Other dates of events indicated in the contract documents.

No time extension will be given for the above restrictions. The contract time for the project has accounted for any loss of time due to the above restrictions.

Closure of only one lane of traffic will be allowed during lane-closure hours. Keep lanes open to traffic and allow flow at normal posted speed limit during non-lane-closure hours.

If applicable, coordinate lane closures with adjacent project(s) at no increase in contract price or contract time.

Rental fees will be assessed in accordance with Subsection 108.10 – Rental Fees for Unauthorized Lane Closure or Occupancy, for failure to open lanes to traffic during peak hours. Morning and afternoon peak hours shall be from 5:30 a.m. to 8:30 a.m. and 3:00 p.m. to 6:00 p.m., respectively, Monday through Friday.

Before scheduling work, submit requests for detours and lane closures as follows:

(1) Detours - 8 weeks before implementing detours.

(2) Lane closures - 6 weeks before implementing lane closures.

Include the following with detour and lane closure requests:

- (1) Explanation of proposed changes to existing traffic pattern.
- (2) Installation schedule for informational and traffic control signs.
- (3) Publication schedule for legal notices.
- (4) Plan showing proposed informational signs.
- (5) Plan showing lane changes or detours in accordance with accepted TCP, including details at beginning of multi-lane highway lane changes and detours.

Detours or lane closures will not be allowed before the Engineer accepts detour or lane closure request.

TABLE 645-I - FOR TRAFFIC CONTROL PLAN

| POSTED SPEED LIMIT (M.P.H.) | SIGN SPACING (D) (FEET) | TAPER LENGTH (T) (FEET) | | LONGI- TUDINAL BUFFER SPACE (B) (FEET) | SPACING OF CONES OR DELINEATORS (FEET) | | |
|--------------------------------------|----------------------------------|----------------------------|------------------------------|--|---|-------------|--------------|
| | | W = 12' OR LESS * | W = GREATER THAN 12' * | | TAPER | TANGEN T | WORK AREA |
| 20 | 250 | 200 | W x 17 | 35 | 20 | 20 | 10 |
| 25 | 250 | 200 | W x 17 | 55 | 25 | 25 | 10 |
| 30 | 250 | 250 | W x 20 | 85 | 30 | 30 | 10 |
| 35 | 250 | 250 | W x 20 | 120 | 35 | 35 | 10 |
| 40 | 500 | 350 | W x 30 | 170 | 40 | 40 | 10 |
| 45 | 500 | 550 | W x 45 | 220 | 45 | 45 | 10 |
| 50 | 1000 | 600 | W x 50 | 280 | 50 | 50 | 10 |
| 55 | 1000 | 700 | W x 55 | 335 | 55 | 55 | 10 |

* W = width of lane or shoulder

(F) **Advisory Signs.** Submit advisory sign shop drawings. Construct, install, maintain, and remove two advisory signs as ordered by the Engineer. Place signs at locations designated by the Engineer. Provide signs, minimum 8 feet wide by 4 feet high, with black letters on orange background, and with three 4.00 pounds/foot flanged channel posts for each sign.

Include starting date and hours of construction in sign message. Use letter heights of 8 inches, Series D. The Engineer will review and accept advisory signs' wording before fabrication. Install advisory signs two weeks before start of construction. Remove advisory signs immediately after

313 construction has been completed or as ordered by the Engineer.
314

315 **(F) Advertisement.** Place advertisement in newspaper, as ordered by
316 Engineer, for the following traffic pattern changes or night work:
317

- 318 (1) Detours.
- 319
- 320 (2) Lane closure.
- 321
- 322 (3) Permanent road closure.
- 323
- 324 (4) Permanent new route that changes previous route.
- 325

326 Include the following information:
327

- 328 (1) Map of traffic pattern change limits.
- 329
- 330 (2) Map showing lane(s) closure and detour pattern.
- 331
- 332 (3) Notice of starting and ending dates and duration.
- 333
- 334 (4) Explanation of lane(s) closure or detours in "Notice To
335 Motorist".
336

337 Quality of map shall conform to the following requirements:
338

- 339 (1) No freehand printing or penciling.
- 340
- 341 (2) Highlight important features by darkening, cross-hatching,
342 crossing-out, or coloring important words, as necessary.
- 343
- 344 (3) Provide maps with minimum size of five columns wide and four
345 columns deep. Lesser width columns may be considered to balance
346 against size of drawing.
- 347
- 348 (4) Text specifications.
- 349
 - 350 (a) Work being featured - 3/16-inch text.
 - 351
 - 352 (b) Major roads and features - 1/8-inch text.
 - 353
 - 354 (c) Other roads and features- first letter of sentence upper
355 case.
 - 356
 - 357 (d) "NOTICE TO MOTORIST" in upper case.
 - 358
 - 359 (e) Message - first letter of sentence upper case.

(5) Line Thickness.

(a) Important feature being advertised - line thicker than rest of map.

(b) Directional arrow - bolder than rest of lines shown on map, when important, to show route traffic should use.

(6) Show reference direction such as "TO HONOLULU" with arrow.

Submit the following:

(1) "Notice to Motorists" before placement in newspaper, six weeks before start of work.

(2) Actual size of notice to be published in newspaper. The Engineer will not allow size reduction of notices once accepted. Submit final, camera-ready "Notice to Motorists" advertisement.

Place advertisement for three consecutive days and within one week before traffic pattern changes, in publication as ordered by the Engineer.

645.04 Measurement.

(A) Traffic control as specified in Subsection 645.03 - Construction will be measured on a contract lump sum basis. Measurement for payment will not apply.

(B) The Engineer will measure additional police officers, additional traffic control devices, and advertisement, if ordered by the Engineer, on a force account basis, in accordance with Subsection 109.06 - Force Account Provisions and Compensation.

645.05 Payment. The Engineer will pay for the accepted traffic control, additional police officers, additional traffic control devices, and advertisement at the contract price per pay unit, as shown in the proposal schedule. Payment will be full compensation for the work prescribed in this section and the contract documents.

The Engineer will pay for the following pay items when included in the proposal schedule:

| Pay Item | Pay Unit |
|-----------------|----------|
| Traffic Control | Lump Sum |

407 Additional Police Officers, Additional Traffic Control Devices,
408 And Advertisement

Force Account

409
410 An estimated amount for the force account may be allocated in the proposal
411 schedule under "Additional Police Officers And Additional Traffic Control Devices",
412 but the actual amount to be paid will be the sum shown on the accepted force
413 account records, whether this sum is more or less than the estimated amount
414 allocated in the proposal schedule.

415
416 The Engineer will not pay for request submittals. The Engineer will not
417 consider claims for additional compensation of late submittals or requests by
418 Contractor.


2/10/05



R11/97

437
438
439
440

56C-01-04M
645-12a

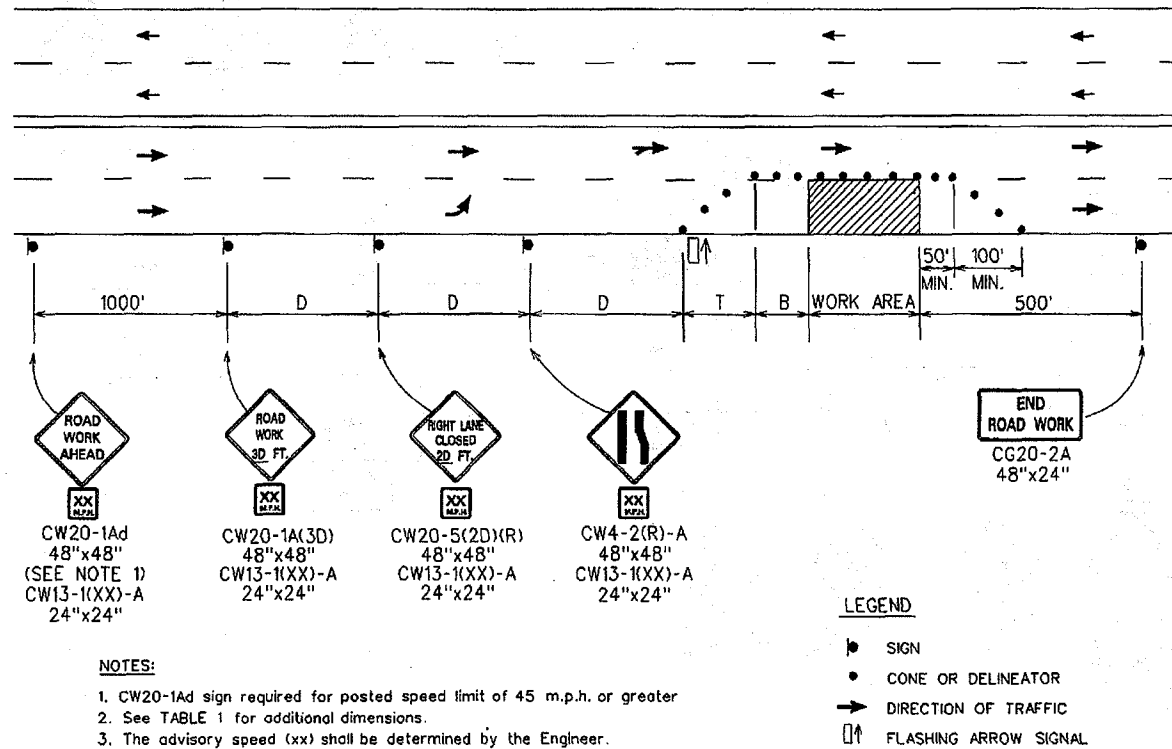

NOTES:


1. CW20-1Ad sign required for posted speed limit of 45 m.p.h. or greater
2. See TABLE 1 for additional dimensions.
3. The advisory speed (xx) shall be determined by the Engineer.

MULTILANE UNDIVIDED HIGHWAY - RIGHT LANE CLOSED


FIGURE 2 - TRAFFIC CONTROL PLAN

441
442
443
444

56C-01-04M
645-13a

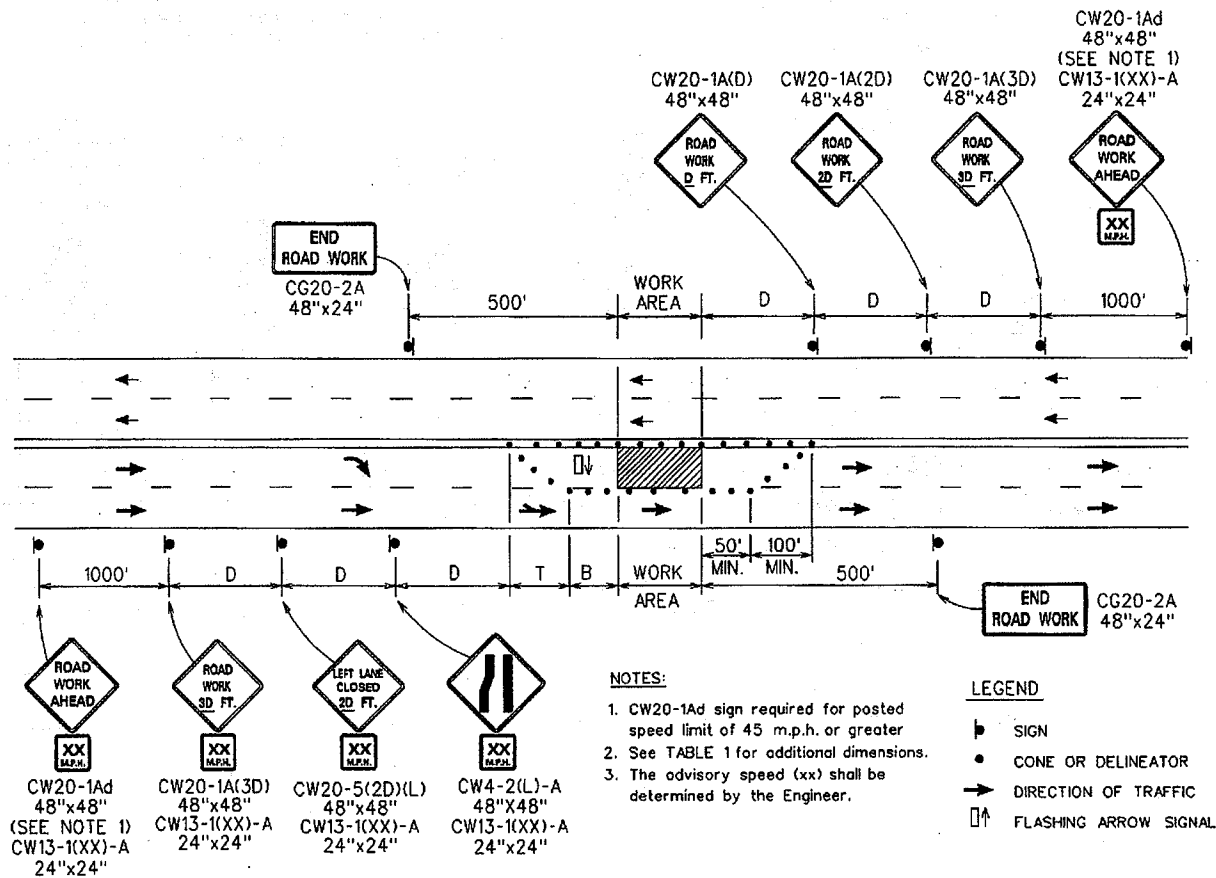

MULTILANE UNDIVIDED HIGHWAY - LEFT LANE CLOSED
FIGURE 3 - TRAFFIC CONTROL PLAN

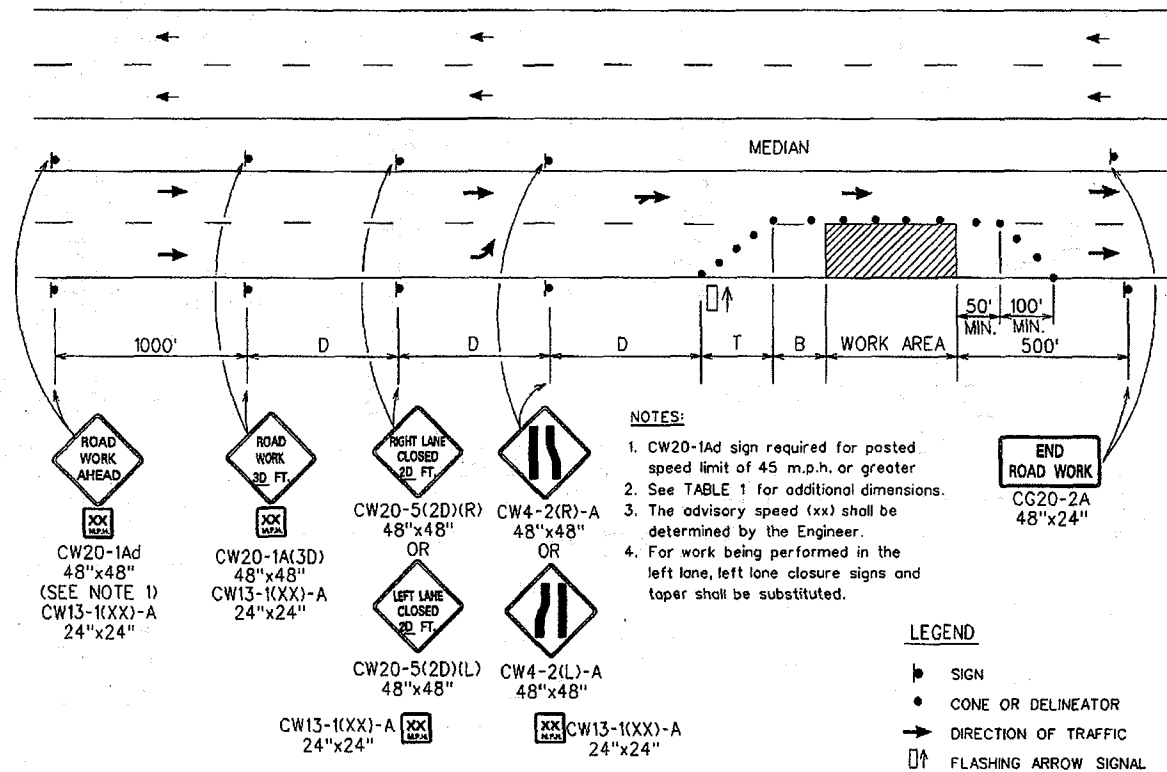


MULTILANE DIVIDED HIGHWAY - ONE LANE CLOSED
FIGURE 4 - TRAFFIC CONTROL PLAN

449
450
451

56C-01-04M
645-15a

2/10/05

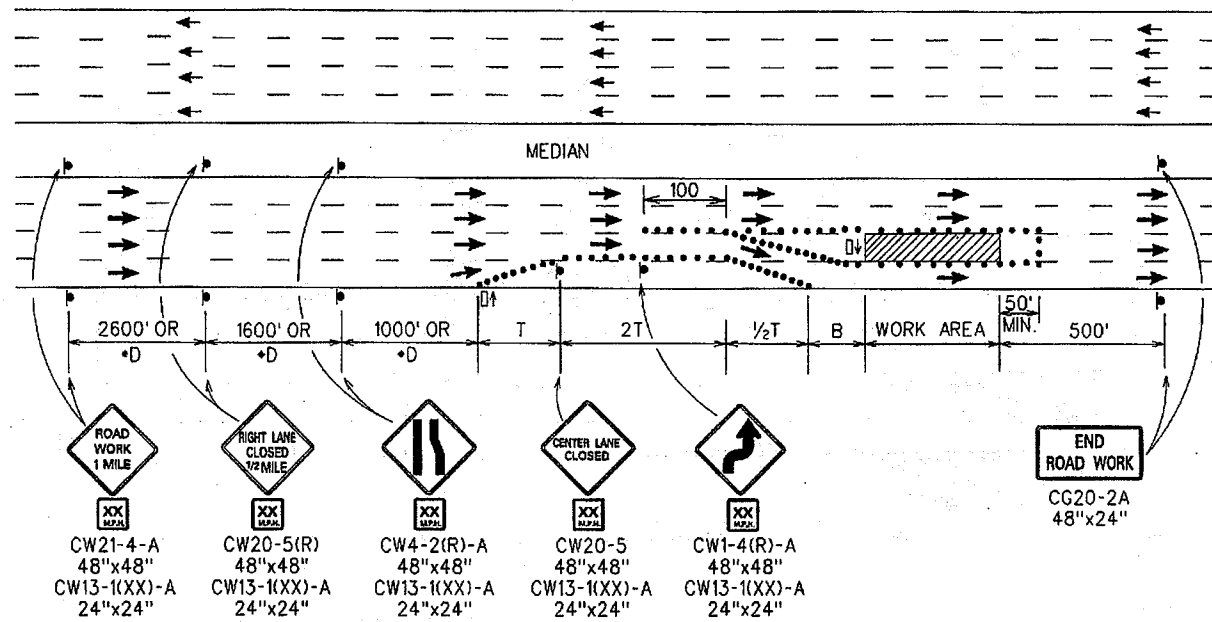

NOTES:

1. For work being performed in the left center lane, use mirror image of above with appropriate left lane closure signs and taper.
2. For undivided highways, delete advance warning signs shown posted in median area.
3. The advisory speed (xx) shall be determined by the Engineer.
4. See TABLE 1 for additional dimensions.
5. For posted speeds of 40 m.p.h. or less, use sign spacings and taper lengths from TABLE 1 and change signs CW21-4-A and CW20-5(R) to CW20-1A(3D) and CW20-5(2D)(R) as shown in Figure 4.

LEGEND

- ▬ SIGN
- CONE OR DELINEATOR
- DIRECTION OF TRAFFIC
- ⬆ FLASHING ARROW SIGNAL


MULTILANE HIGHWAY - CENTER LANE CLOSED

FIGURE 5 - TRAFFIC CONTROL PLAN

452
453
454

56C-01-04M
645-16a

2/10/05

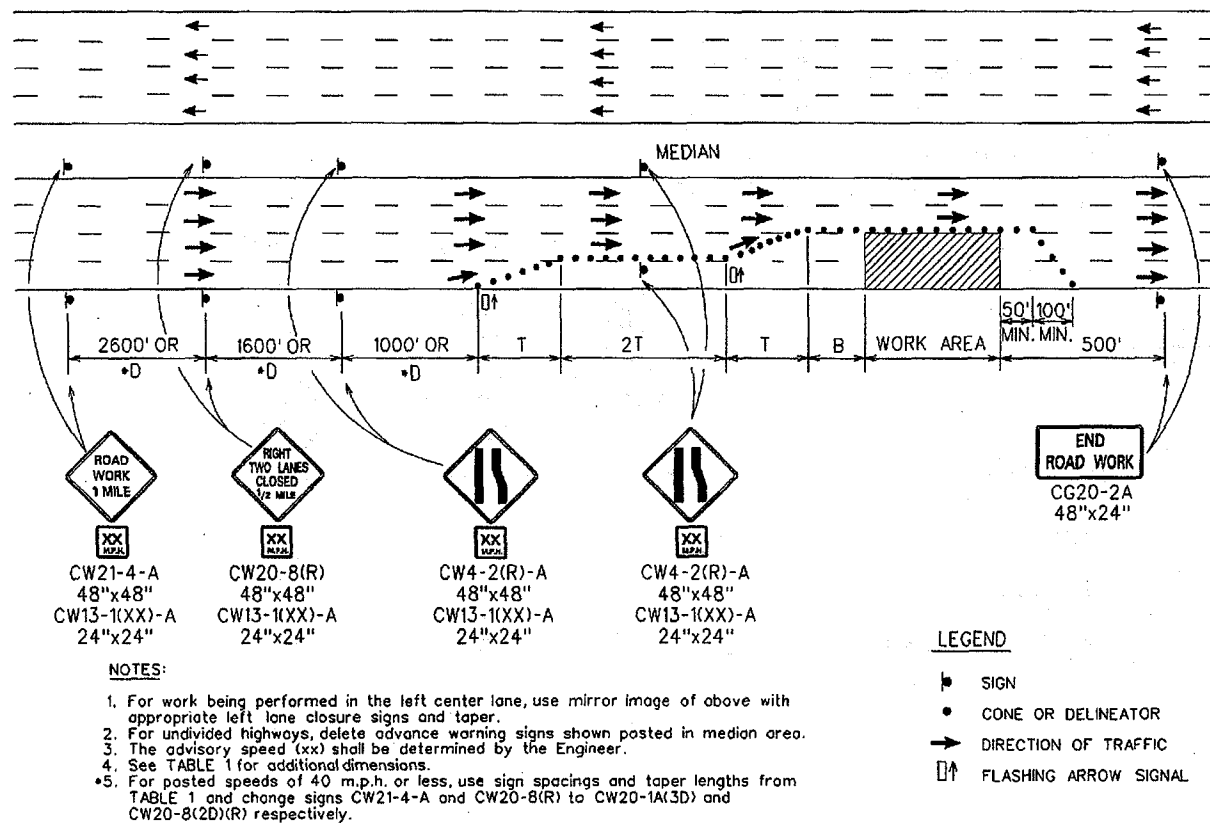

MULTILANE HIGHWAY - MULTIPLE LANE CLOSED


FIGURE 6 - TRAFFIC CONTROL PLAN

455
456

END OF SECTION 645

56C-01-04M
645-17a

2/10/05

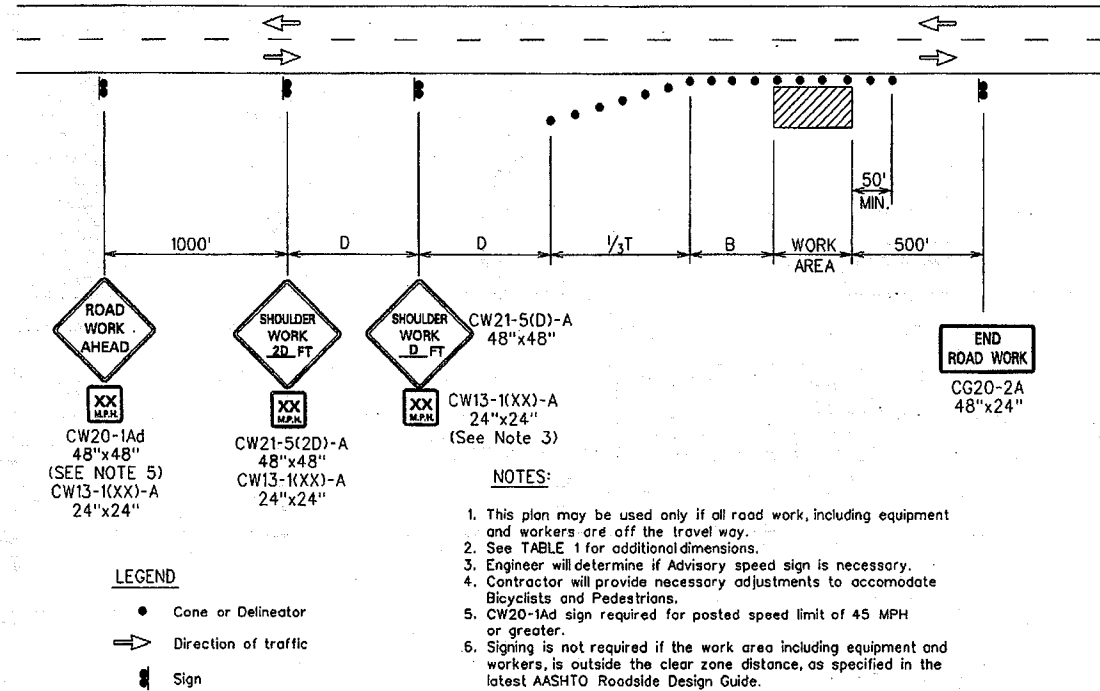

WORKING ON SHOULDER OR ROADSIDE
FIGURE 7 - TRAFFIC CONTROL PLAN

R10/96