


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	190BC-01-05M	2005	13	13


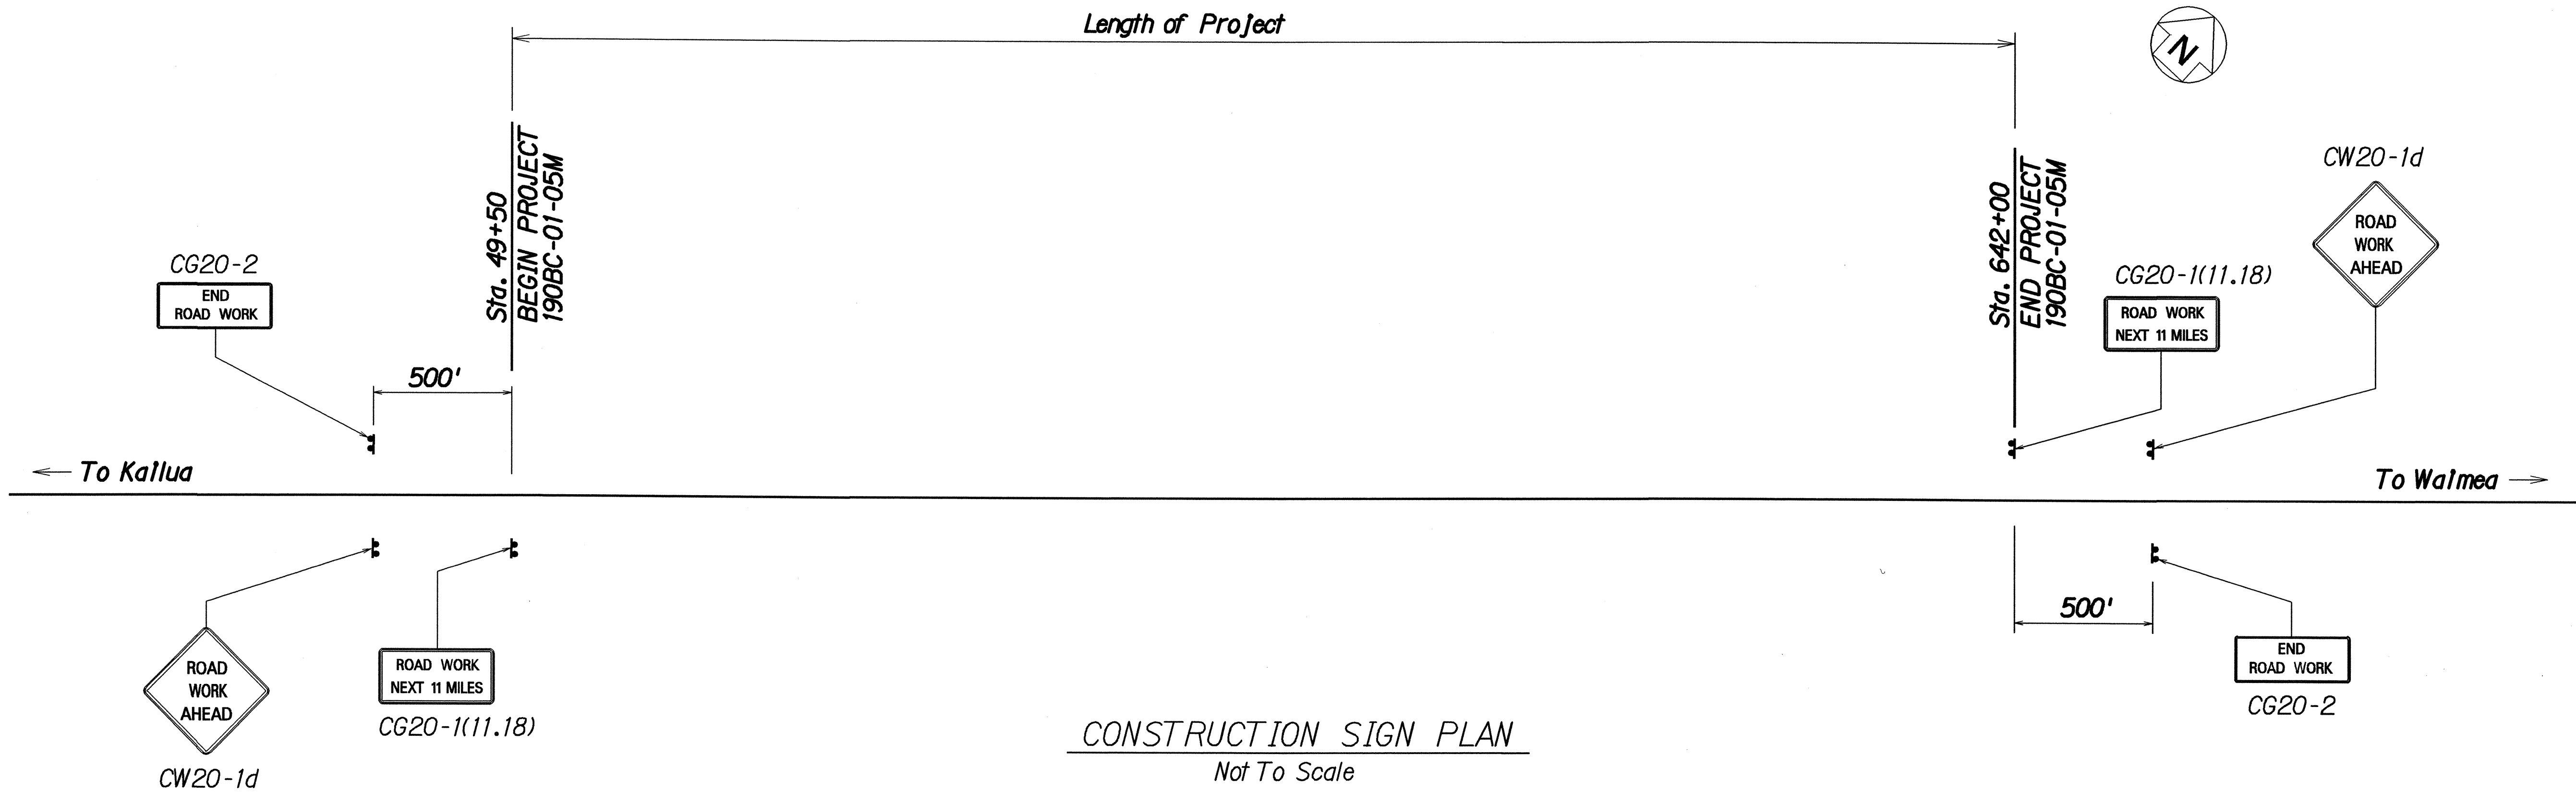


CONSTRUCTION SIGN SCHEDULE					
PROJECT NO.	STATION	LEFT	RIGHT	ITEM No. 621.7121 (no posts)	ITEM No. 621.7120 (two posts)
FAP- 10A	44+50	●			CG20-2
	44+50		●		CW20-1d
	49+50		●		CG20-1(11)
	642+00	●			CG20-1(7)
	647+00	●			CW20-1d
	647+00		●		CG20-2
Total Construction Signs					6

* Final locations of all signs to be determined In the field by the Engineer .

NOTES:

- (1) CW20-1d signs shall read " ROAD WORK AHEAD " .
- (2) CG-1(7) signs shall read " ROAD WORK NEXT 7 MILES " .
- (3) CG20-2 signs shall read " END ROAD WORK " .
- (4) One set of Construction Signs will be paid on a Lump Sum Basis under Pay Item No.621.7120

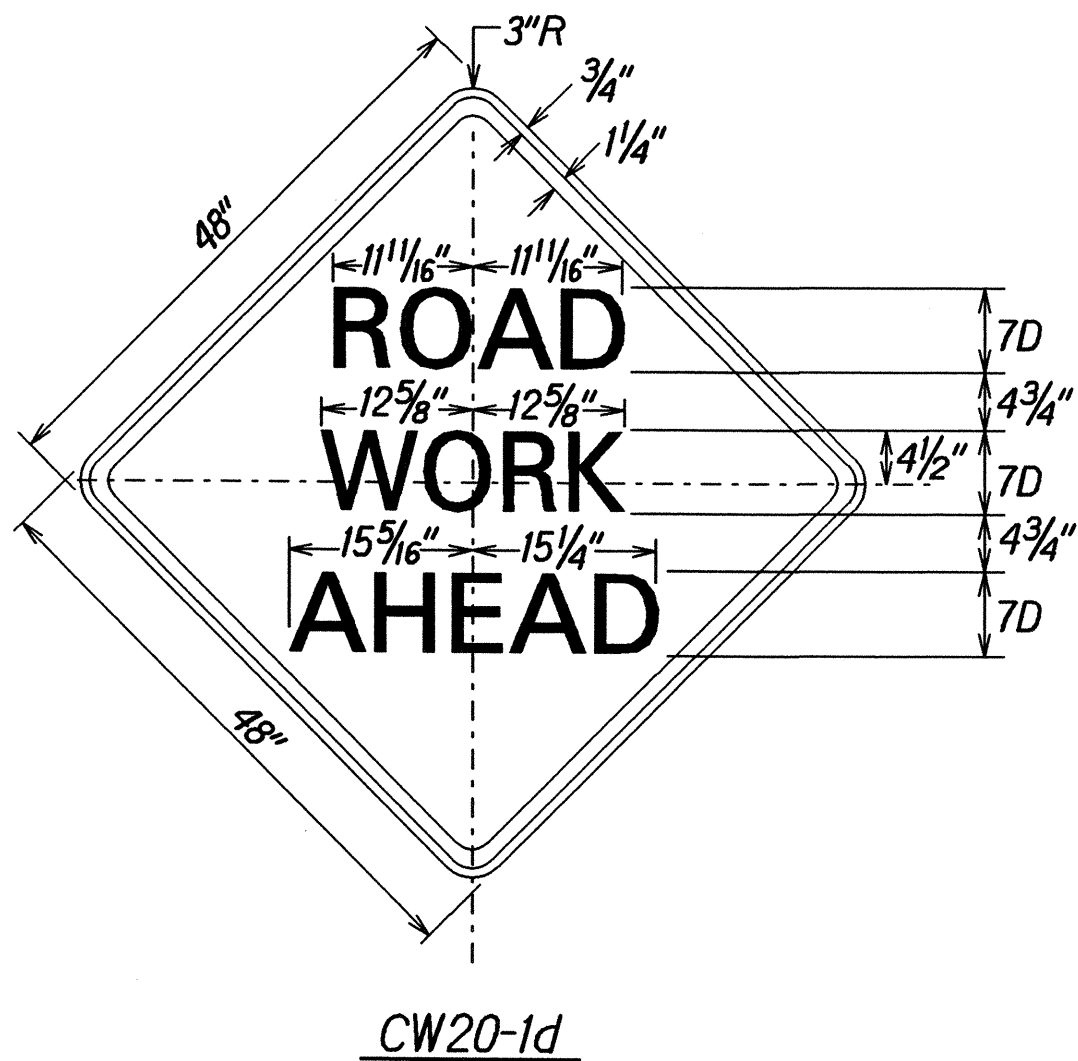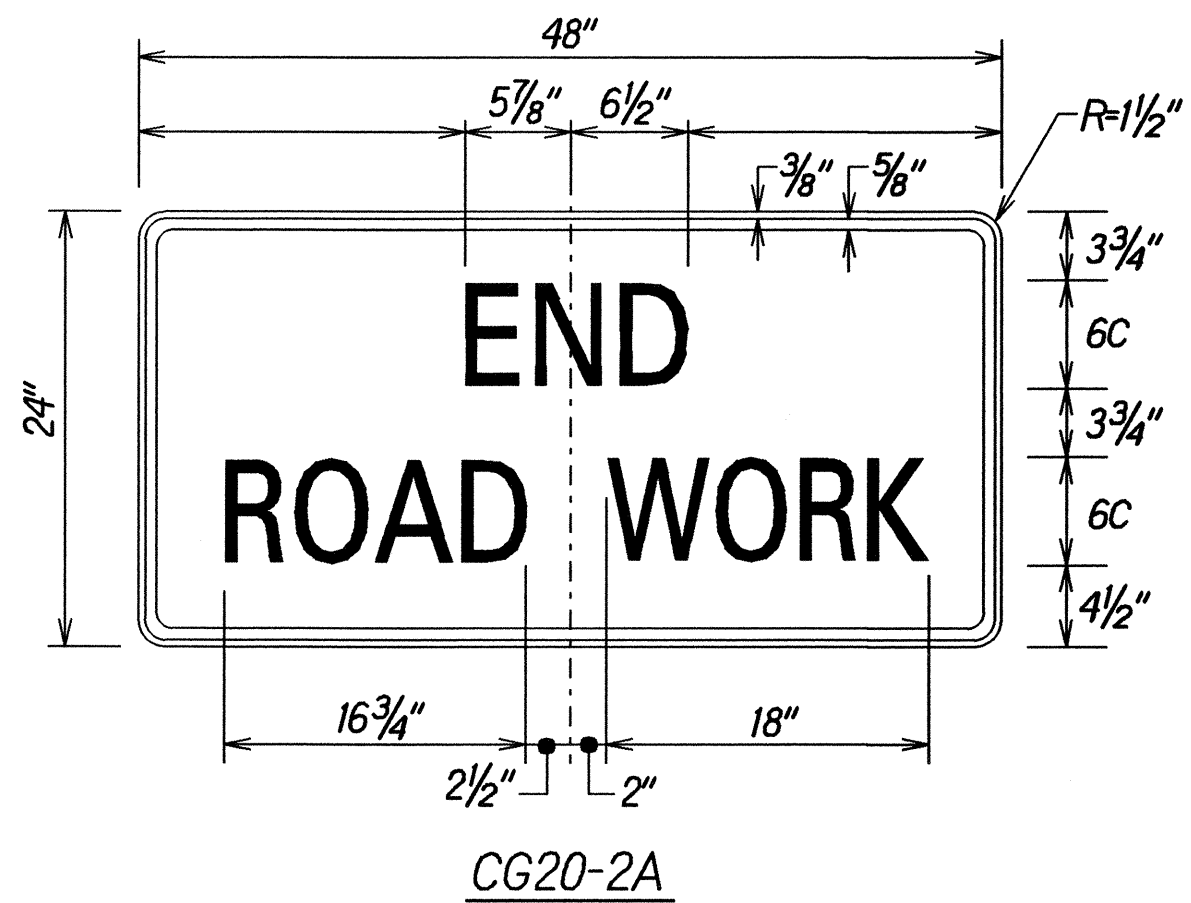

SIGN DETAILS
Not To Scale

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

**CONSTRUCTION SIGN
PLAN & SCHEDULE**
MAMALAHOA HIGHWAY, ROUTE 190 PAVEMENT
REPAIRS - KA'UPULEHU TO PU'UANAHULU
PROJECT NO. 190BC-01-05M
Scale: As Shown Date: April, 2005
SHEET No. 1 OF 1 SHEETS

DESIGNED BY	DATE
TRACED BY	
NOTED BY	
CHECKED BY	
APPROVED BY	
DATE	