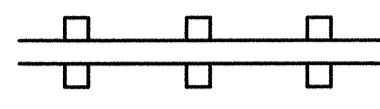





FED. ROAD DIST. NO.	STATE	FEDERAL AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	ER-16(002)	2014	21	54

GENERAL NOTES:


1. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
2. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. The costs shall be incidental to the various pavement marking items.
3. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape's manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
4. The Contractor shall erect advanced construction warning signs at the beginning and at the end of the project site. Construction warning signs shall be placed as indicated on the plans or as directed by the Engineer. The signs shall be kept in place for the duration of the project and shall be maintained by the Contractor. These signs shall be placed in addition to the required traffic control signs called for in Section 645 - Work Zone Traffic Control.
5. Backing for all new regulatory and warning signs shall not be spliced.
6. All sign panels shall conform to Section 630, 631 and 632 of the specifications, DOT standard plans, and the latest editions and amendments of the following FHWA publications:
 - a. "Manual on Uniform Traffic Control Devices for Streets and Highways" (MUTCD)

LEGEND:

-  4" Double Solid Yellow Stripes with 2 each Type D Raised Pavement Markers @ 10'-0" o.c.
-  4" White Edge Stripe with Type C Raised Pavement Markers @ 20'-0" o.c.
-  Reflector Marker (RM-1)
-  New Sign Post with Type II Object Marker

PAVEMENT MARKING NOTES:

1. All pavement striping, legends and symbols shall be retroreflective thermoplastic compound pavement markings.
2. Location of pavement markers is shown schematically. For exact location of markers in relation to stripe, see Standard Plans TE-26, TE-27 & TE-28.
3. Removal of existing pavement markings shall be considered incidental to the various contract items.

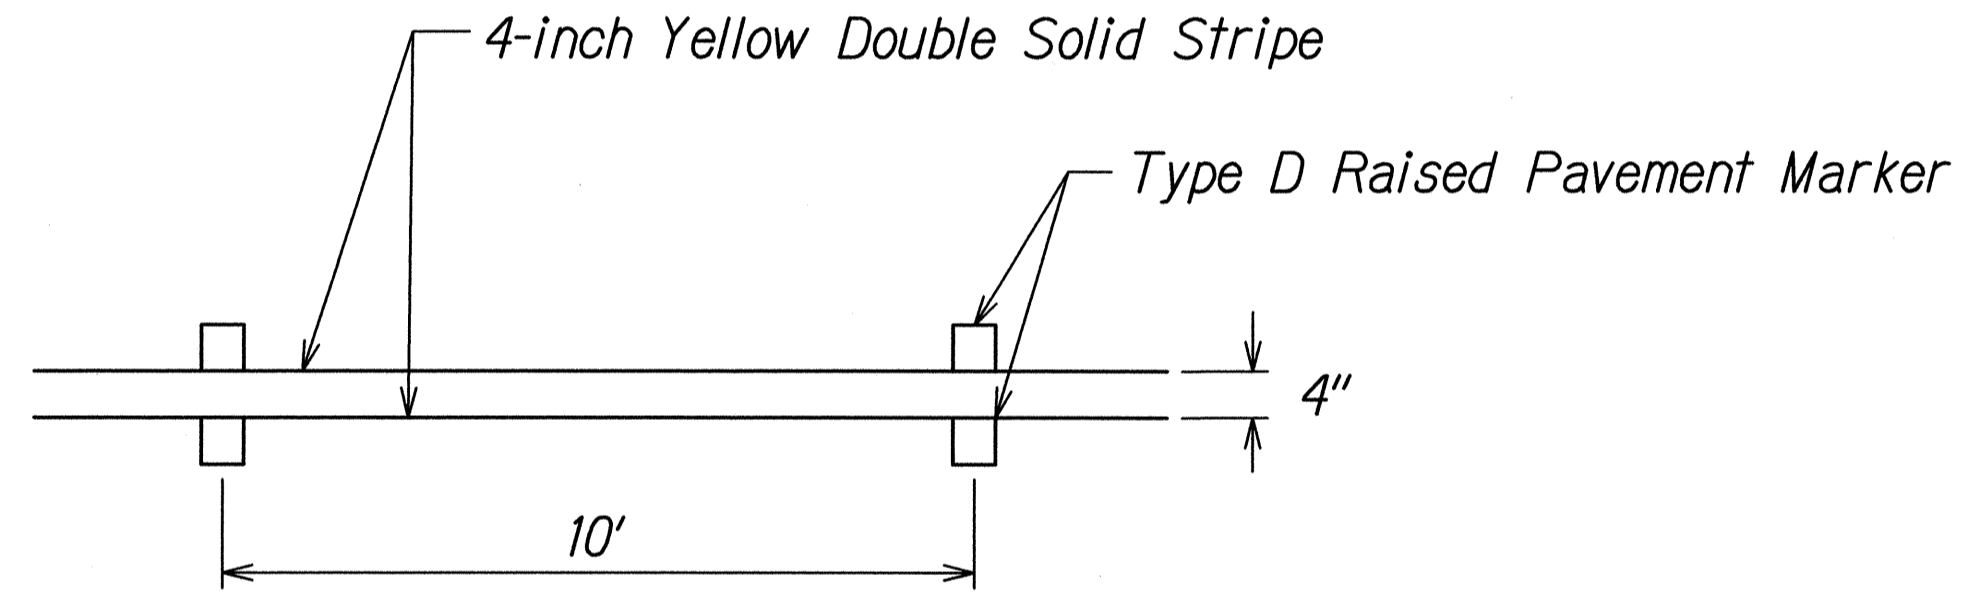

TYPICAL DETAIL OF DOUBLE SOLID STRIPE WITH RAISED PAVEMENT MARKERS


Not to Scale

ABBREVIATIONS:

- RM Reflector Markers
- RPM Raised Pavement Markers


ORIGINAL PLAN	SURVEY PLOTTED BY	DATE
NOTE BOOK	DRAWN BY	
	CHECKED BY	
	DATE	

T-16524A Lumahai/Phase 3 Emergency/Sheets/Signnotes.dgn

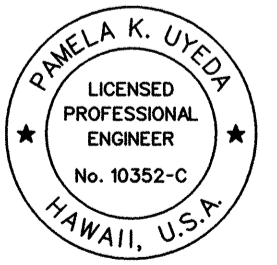 <p>THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION.</p> <p><i>P. Uyeda</i> SIGNATURE</p> <p>04/30/14 EXPIRATION DATE OF THE LICENSE</p>	STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION SIGNING AND PAVEMENT MARKINGS NOTES AND LEGEND KUHIO HIGHWAY (ROUTE 560) EMERGENCY SLOPE STABILIZATION IN LUMAHA IN THE VICINITY OF M.P. 5.1 TO 5.3 Fed. Aid Proj. No. ER-16(002)
	Scale: None Date: Oct. 25, 2013
	SHEET No. C4J OF 2 SHEETS
	21

FED. ROAD DIST. NO.	STATE	FEDERAL AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	ER-16(002)	2014	22	54

TRUE NORTH
SCALE: 1" = 20'

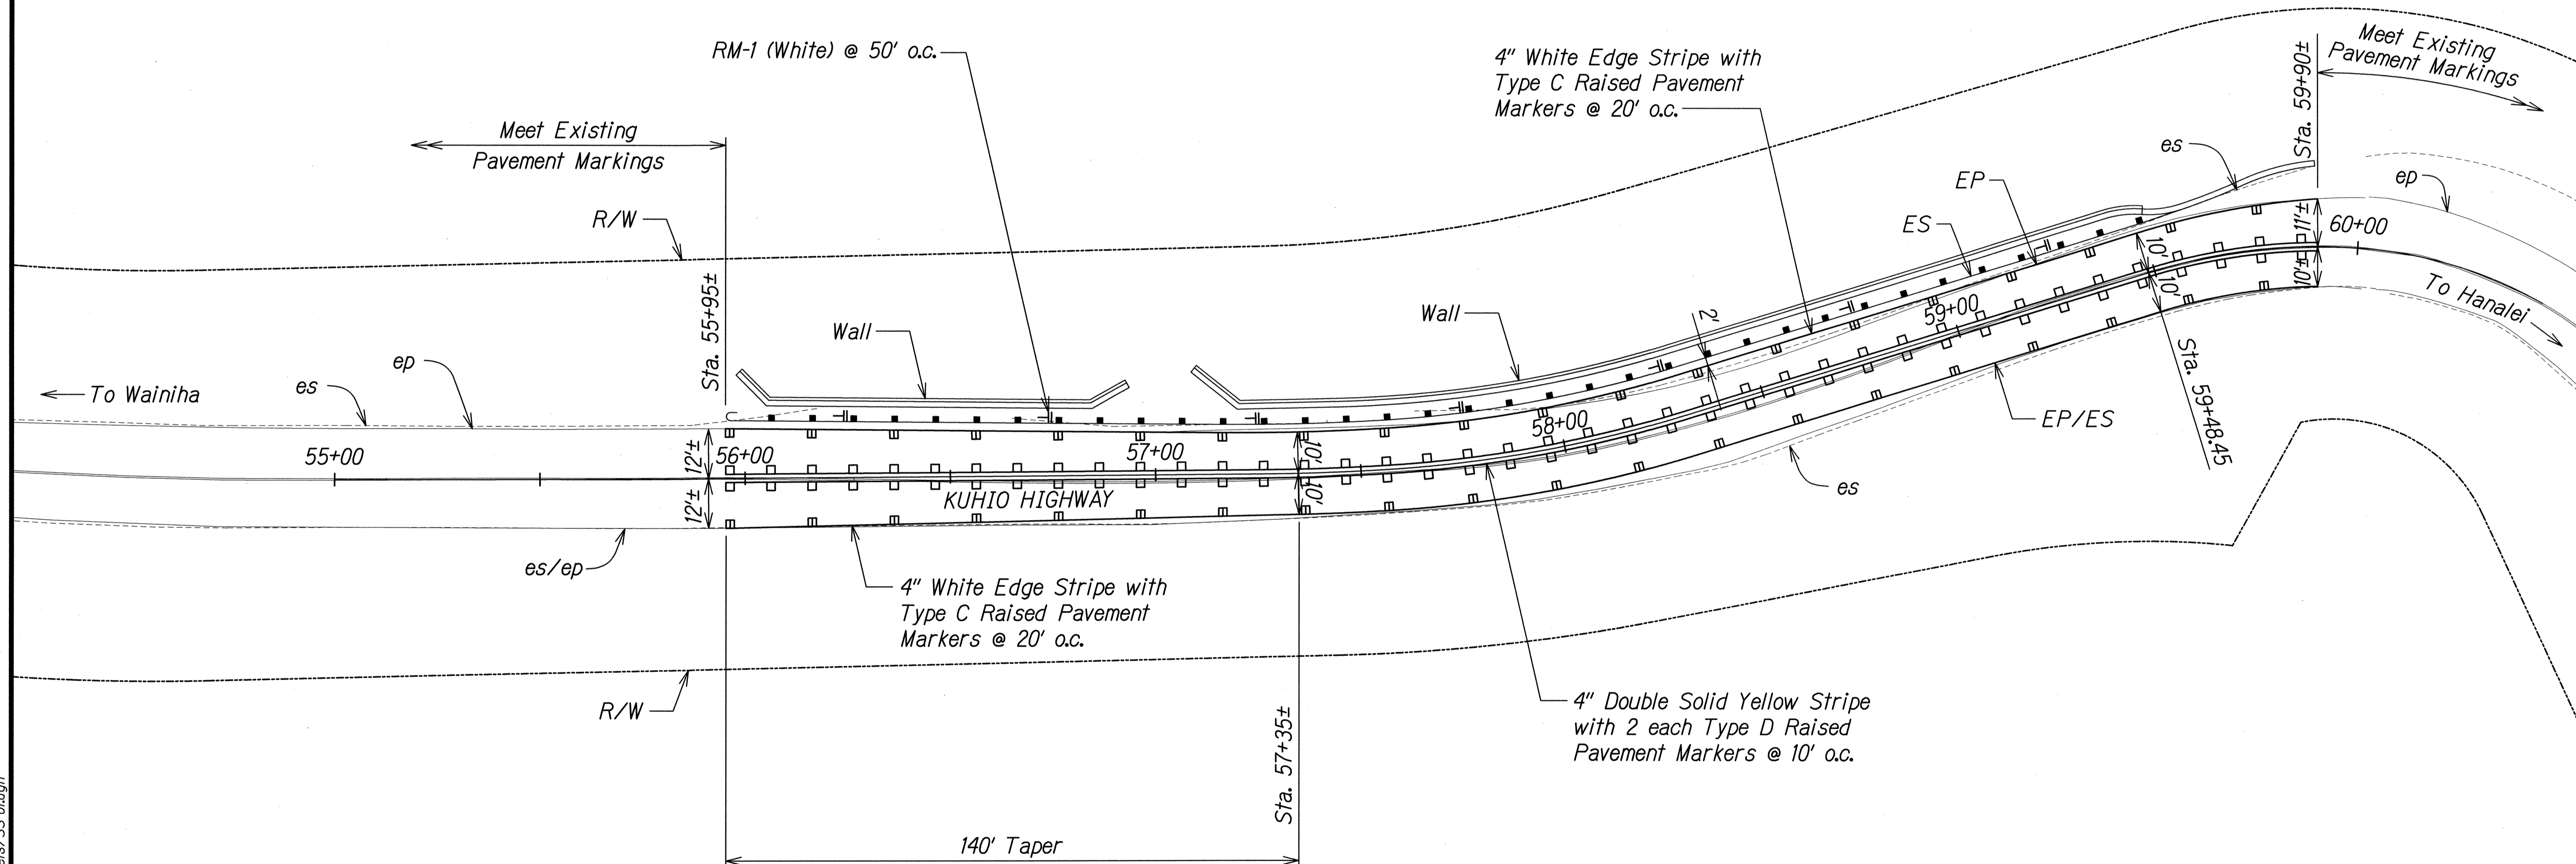

ORIGINAL PLAN	SURVEY PLANNED BY	DATE
NOTE BOOK	DRAWN BY	
	DESIGNED BY	
	CHECKED BY	

T:\165244 Lumahai\Cadd\Phase 3 Emergency\Sheets\SS-01.dgn

PANELA K. UYEDA
LICENSED PROFESSIONAL ENGINEER
No. 10352-C
HAWAII, U.S.A.

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION.

[Signature]
SIGNATURE

04/30/14
EXPIRATION DATE OF THE LICENSE

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

SIGNING AND PAVEMENT MARKING PLAN
KUHIO HIGHWAY (ROUTE 560)
EMERGENCY SLOPE STABILIZATION IN LUMAHA'I
IN THE VICINITY OF M.P. 5.1 TO 5.3
Fed. Aid Proj. No. ER-16(002)

Scale: 1"=20' Date: Oct. 25, 2013