

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	200A-01-10	2012	14	0


Notes:



1. Extent of removal is approximate. additional removal required for the construction shall be incidental to the project and will not be considered for additional compensation.
2. The contractor shall preserve and protect all existing items not designated to be demolished.
3. All foundations, concrete slabs, and utilities shall be removed and disposed of for the building, sheds, and pens shown to be removed unless otherwise noted.
4. Tree removal work shall include felling and removal of trees, and removal of stumps and roots.

Cesspool Demolition Notes:

1. Contractor shall not backfill cesspool until specific written Underground Injection Control (UIC) instructions are issued. Backfill and Abandonment without instruction and authorization from the UIC program is subject to penalty and corrective action under HRS 340E.
2. Prior to backfilling, the cesspool shall be pumped out and cleaned, and contents disposed of properly. The top three (3) feet, including the concrete cover shall be removed.
3. Contractor shall backfill the cesspool as instructed by the UIC instructions.



LEGEND

-  Remove existing tree
-  Remove existing structure
-  Remove existing utility line

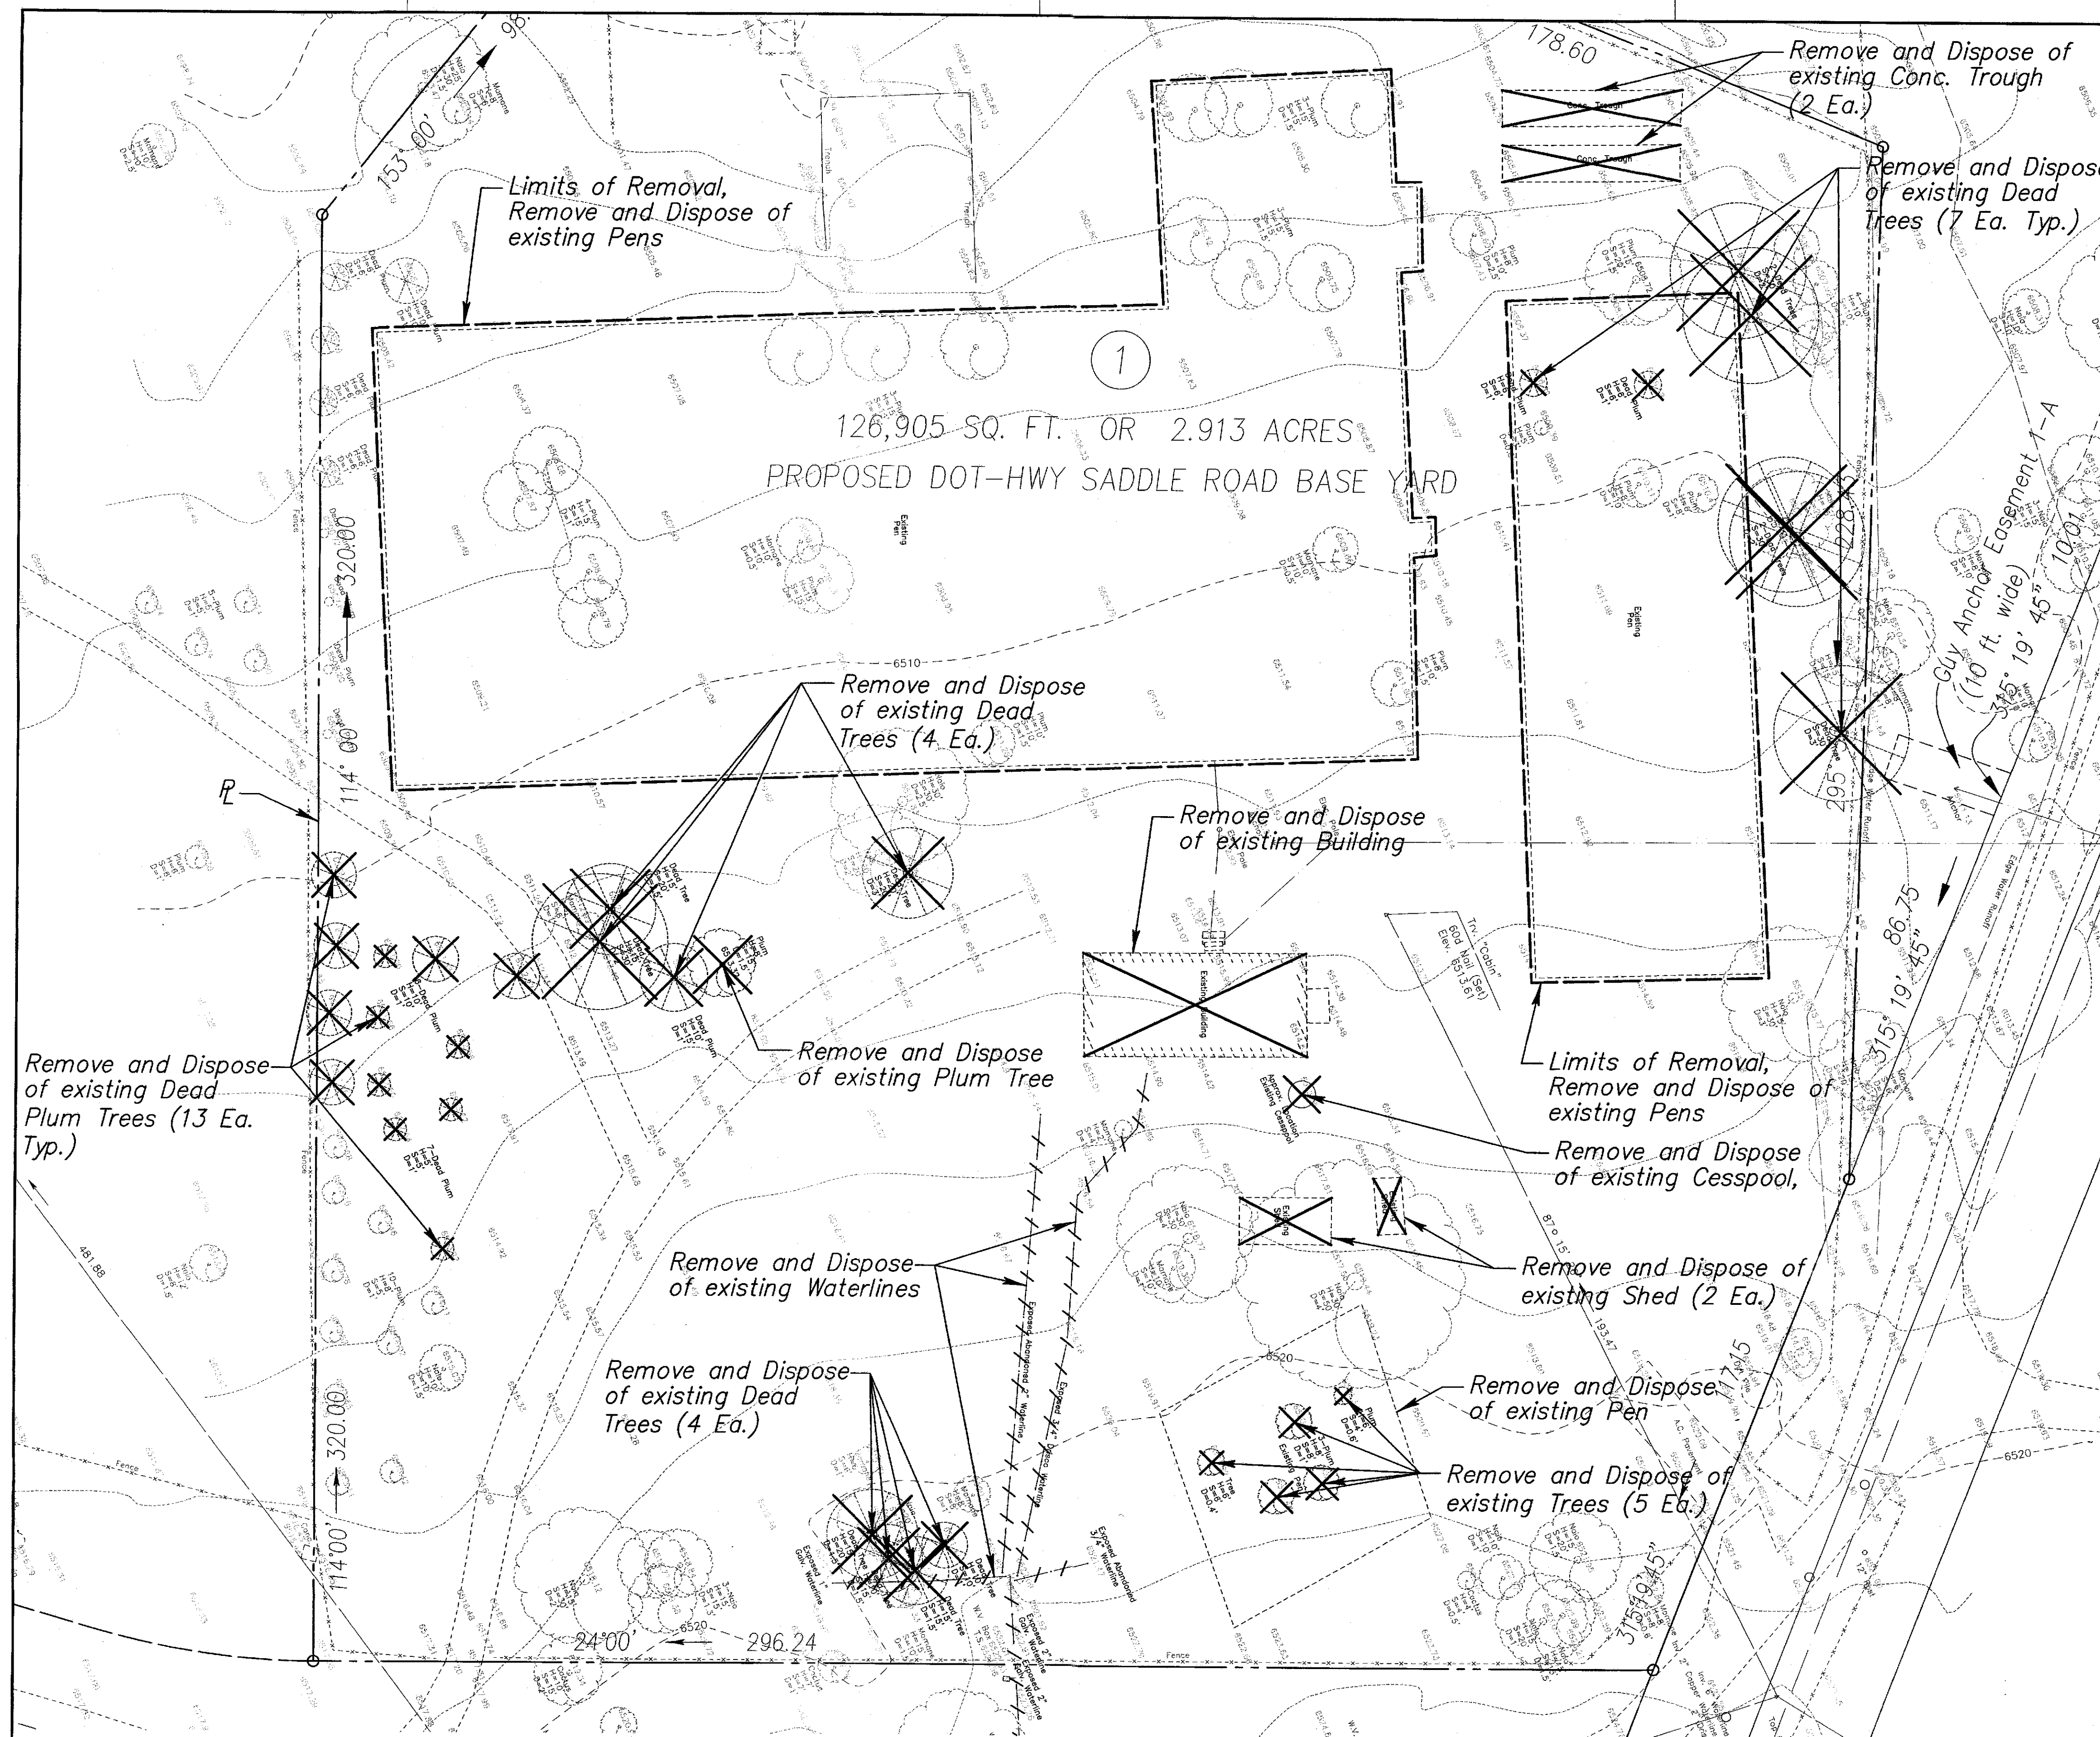

EXISTING CONDITIONS AND REMOVAL PLAN

SCALE: 1"=20'

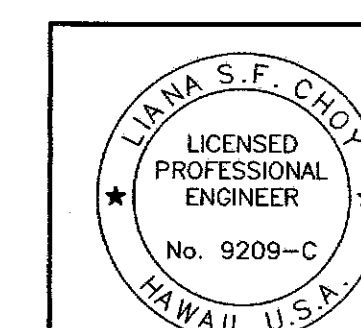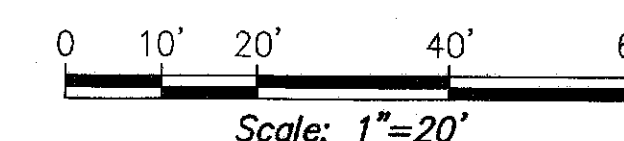

4/30/2016
SIGNATURE EXPIRATION DATE OF THE LICENSE
THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION

C-11

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
EXISTING CONDITIONS AND REMOVAL PLAN
MAUNA KEA MAINTENANCE
BASEYARD
Saddle Road
Project No. 200A-01-10
Scale: 1"=20' Date: September, 2015
SHEET No. 11 OF X SHEETS

ORIGINAL PLAN
DATE
SURVEY PLOTTED BY
DRAWN BY
TRACED BY
DESIGNED BY
NOTED BY
CHECKED BY
No.