




Aug. 27, 1956

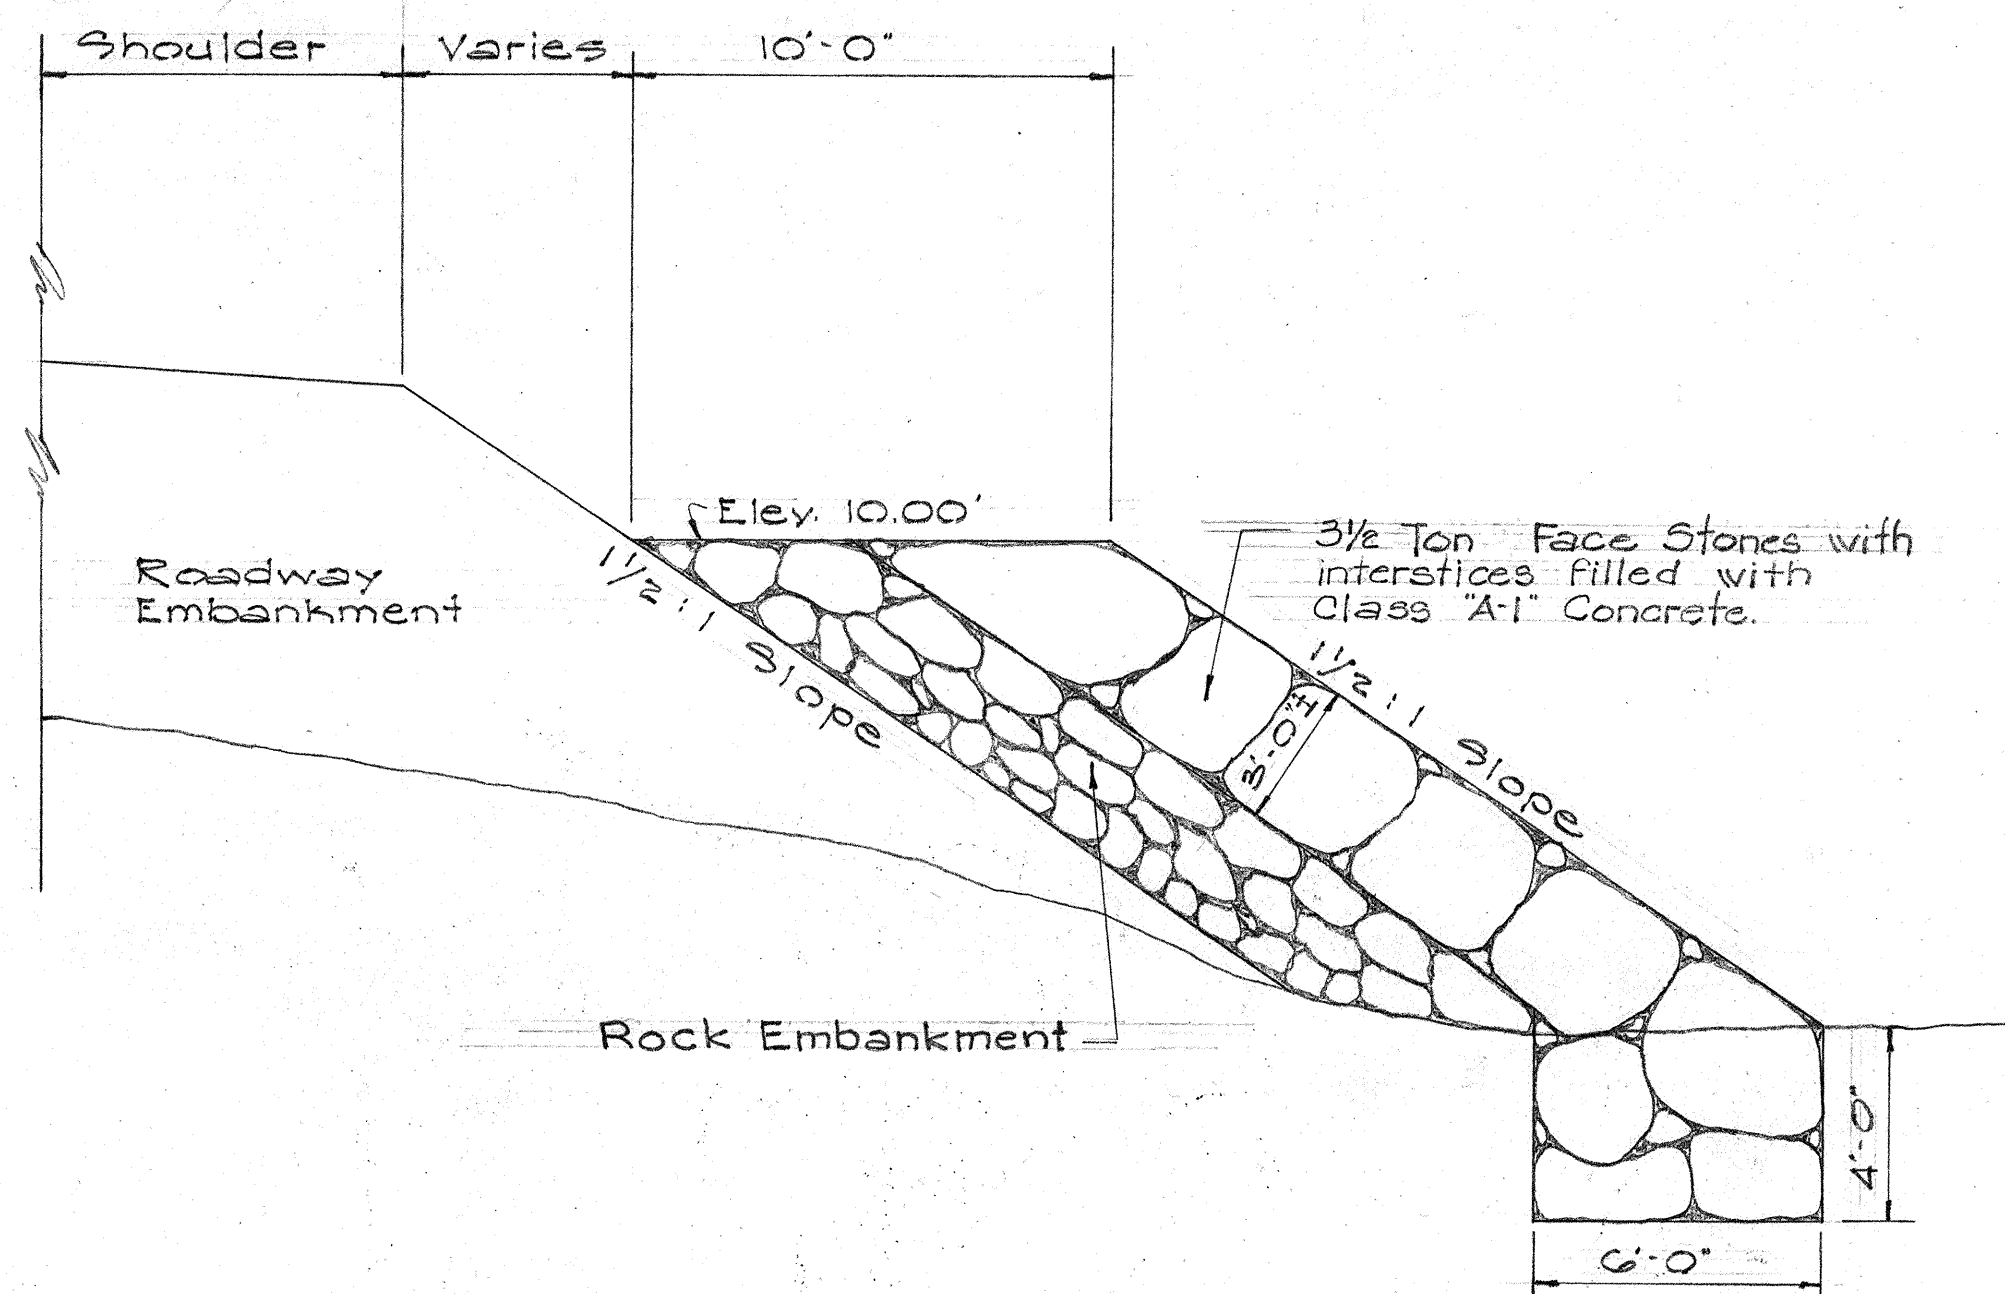


**TYPICAL SECTION
FOR
STONE AND CONCRETE SEAWALL**
Scale: 1/4" = 1'-0"

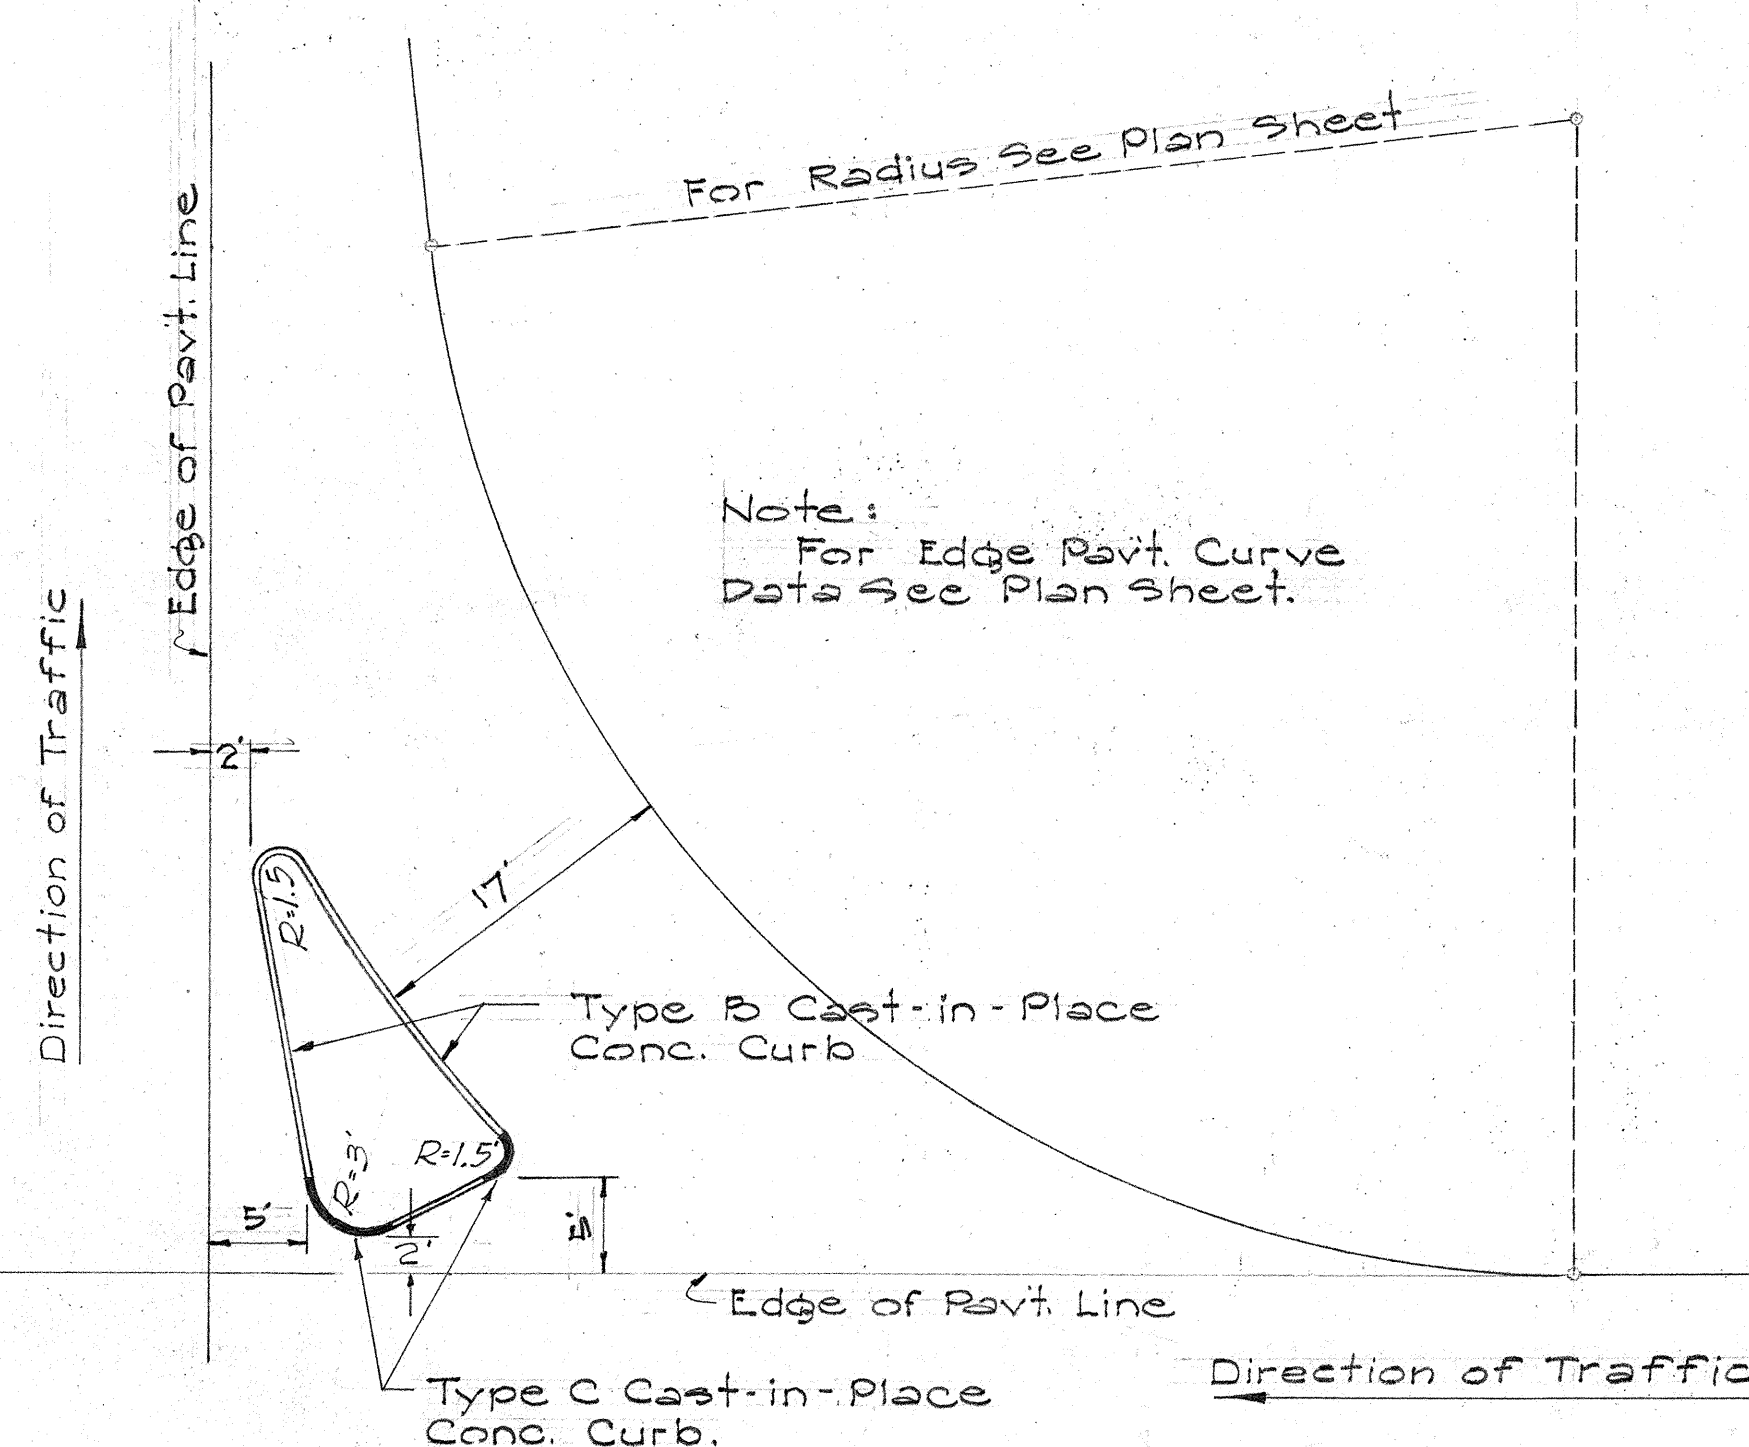

**DETAIL
OF
TRAFFIC ISLAND**
Scale: 1" = 10'

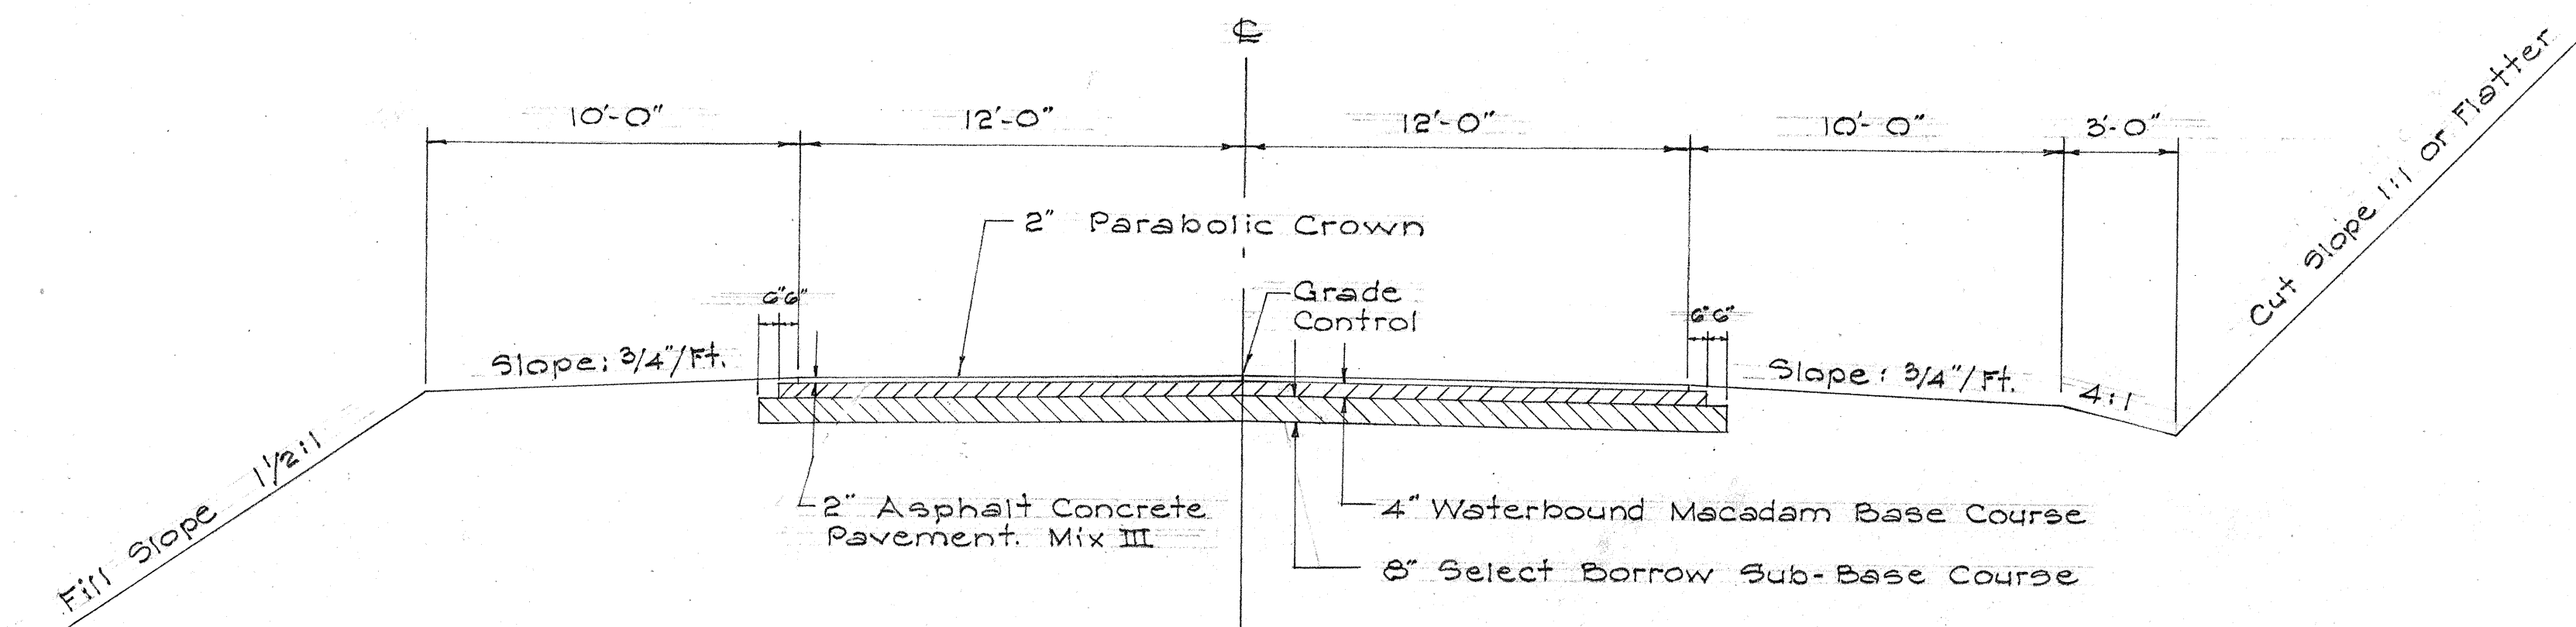

TYPICAL SECTION ON TANGENTS
Scale: 1/4" = 1'-0"

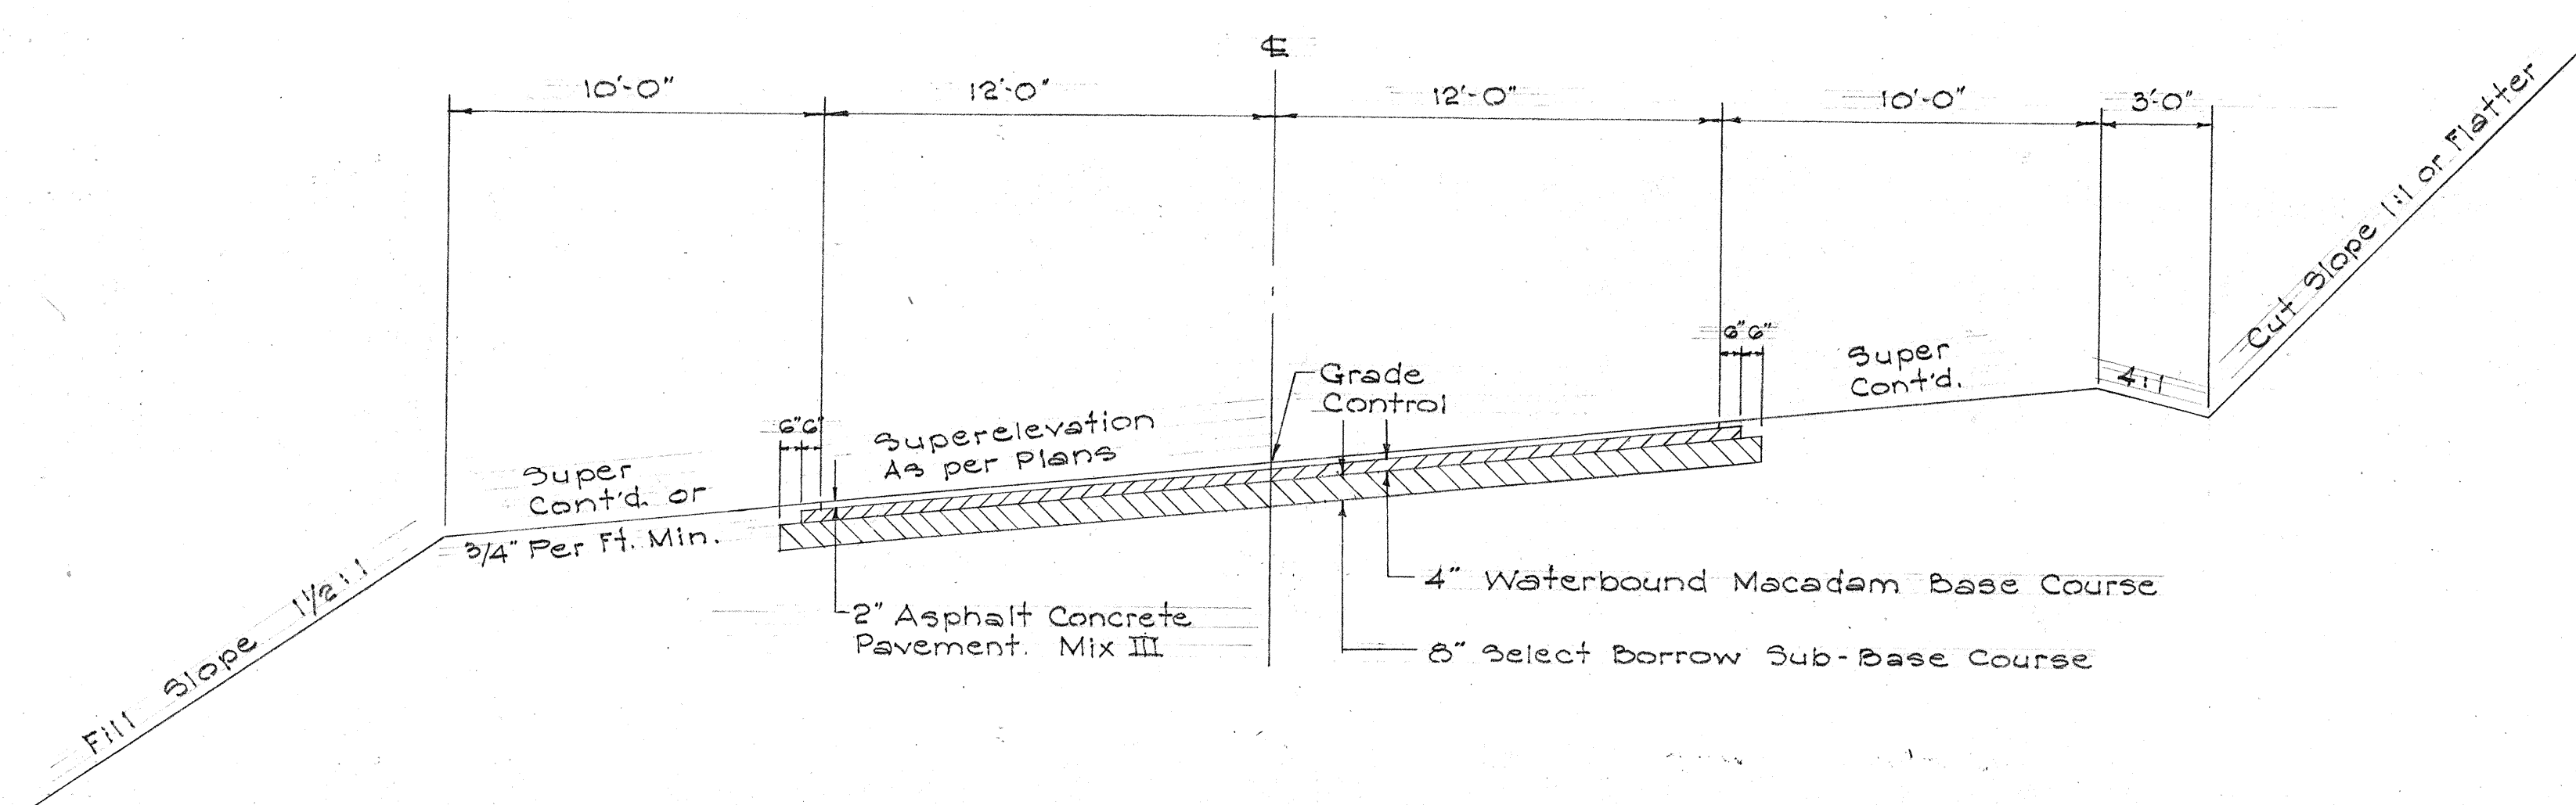

TYPICAL SECTION ON CURVES
Scale: 1/4" = 1'-0"

NOTE:
Select Borrow Subbase Material shall consist of 8" of Quarry Waste placed in two layers of 4" compacted thickness, (Crusher Run 3" Max. Size.) or equivalent.
4" Waterbound Macadam Base Course to be placed in one layer of 4" compacted thickness and shall consist of Mineral Aggregate (Coarse Rock No. 2 - 2 1/2" to 3/4") and Filler (1/2" to No. 100).
2" Asphalt Conc. Surface Course Using Mix No. III. The 4" Waterbound Macadam Base Course is to be Primed with Slow Curing Liquid Asphalt at the rate of 0.35 gal. per sq. yd. before placing the A.C. Pavement.
All above Courses subject to Specifications and Special Provisions.

TERRITORIAL HIGHWAY DEPARTMENT
TERRITORY OF HAWAII
TYPICAL SECTIONS
LAHAINA - WAILUKU ROAD
LAHAINA SECTION
FED. AID PROJ. No F030-1(1)
Scale: As Noted June 1955

SHEET No. 1 OF 1 SHEETS

5795.2

DATE: 8/27/56
SURVEY PLOTTED BY: H. J. S.
CHECKED BY: H. J. S.
ORIGINAL PLAN NO.:
NOTE BOOK NO.:
QUANTITIES CHECKED BY: