

All Aluminum 6061T6 Alloy and Stainless Steel Components.

18 1/2 " Fully Extended Overall Length

Fully Closed Overall Length

(14)

Allows Length Adjustment of 4 1/2

8'-1"

74 1/2"

(11)

ADJUSTABLE LENGTH

SWING SIGN BRACKET

NOT TO SCALE

Street Name Sign Varies Mast Arm \* Equal Distance. Center Between Signal Head and Signal Pole

Signal Lights

Swing Sign Brackets—

STREET NAME SIGN MOUNTING

ON MAST ARM NOT TO SCALE

Aluminum Angle secured to back of sign w/Pop Rivets @ 6" spacing Adjustable Swing Sign Bracket (typ.) -Street Name Sign 3/4 " -R=2"Varies (Rear View)

#### PANEL & SWING BRACKET LAYOUT FOR STREET NAME SIGN

-2" RADIUS, TYP.

FED. ROAD STATE

FISCAL SHEET YEAR NO. S

19


TOTAL SHEETS

FED. AID PROJ. NO.

HAW. NH-STP-030-1(27) 2000

NOT TO SCALE

Signal Pole—

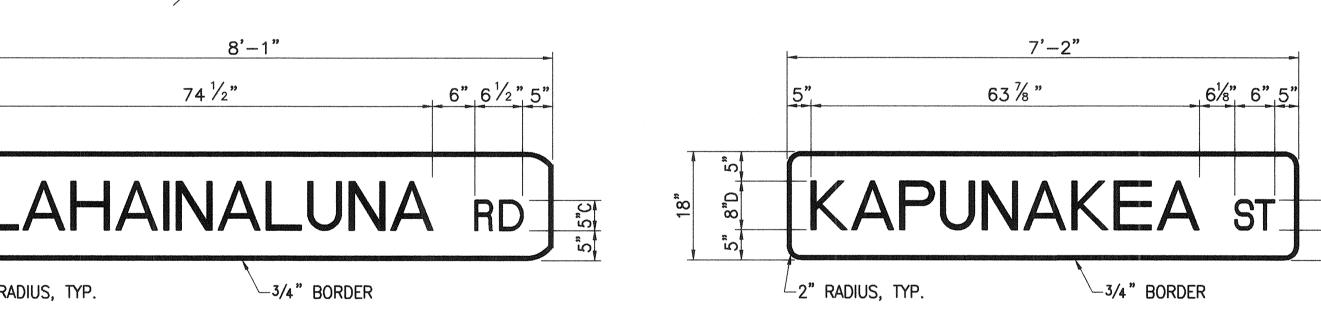

57/8" 141/2" 5" \_EIALI'İ <sup>3</sup>/4" BORDER

37 % "

5'-8"

## STREET NAME SIGN DETAIL

STREET NAME SIGN DETAIL NOT TO SCALE

# NOT TO SCALE

## 4'-5" 30 ½ " 61/8" 6" 5' HINAU $^{ackslash}$ 2" RADIUS, TYP. −3/4" BORDER

STREET NAME SIGN DETAIL NOT TO SCALE

LICENSED PROFESSIONAL **ENGINEER** No. 3244-C STATE OF HAWAII

DEPARTMENT OF TRANSPORTATION

HIGHWAYS DIVISION

### STREET NAME SIGNS DETAILS

HONOAPIILANI HIGHWAY TRAFFIC SIGNAL MODERNIZATION KAANAPALI TOWARDS LAHAINA FEDERAL AID PROJECT NO. NH-STP-030-1(27)

SCALE: AS NOTED Therdre 1 Kawahiyust

SHEET No. 1 OF 1 SHEETS

FIXED LENGTH NON-ADJUSTABLE SWING SIGN BRACKET NOT TO SCALE

- Pivotal Upper Bracket
- (2) 1 5/8 " x 1/4" Slot for double strapping to electrolier mast arm.  $(M2G-34S(HD) .030" \times 3/4"$  Heavy Duty Stainless Steel Strap with M2G-34B(HD) Buckle recommended.)
- 1/2 " 13 x 1 1/2 " Stainless Steel Hex Head Bolt with Stainless Steel Hex Lock Nut and 1/16 "Stainless Steel Washer (both sides). Allows upper bracket to pivot and align with electrolier mast arm.
- 6" Overall drop with Fixed Length Sign Bracket
- 5 Stainless Steel Dampener Spring (Removable)
- (6) Stainless Steel Hex Lock Nut with 1/16 "Stainless Steel Washer
- O.D. Axle Housing
- (8) 1/2 " 13 x 4" Stainless Steel Hex Head Bolt with 1/16" Stainless Steel Washer
- (9) Oilite Bushing
- (10) Sign Mounting Sets, consisting of two each 5/16 " 18 x 1" Stainless Steel Hex Head Bolt with Stainless Steel Hex Lock Nut. Two holes on 1 1/2 " centers provide positive lock sign mounting to bracket.
- (11) 8 1/4 " overall length Upper Adjustable Sign Bracket section
- (12) 9" overall length Lower Adjustable Sign Bracket section, including Axle Housing (8" overall length to top of Axle Housing)
- (13) 1/2 " 13 x 1 1/2 " Stainless Steel Hex Bolt with Stainless Steel Hex Lock Nut and 1/16 "Stainless Steel Washers (both sides). Loosen lock nut, adjust bracket teeth to level sign.
- (14) 1 1/4 " x 1 1/4 " x 1/8 " Aluminum Angle



1. Street name signs shall have white message and border on green background.

STREET NAME SIGN DETAIL

-3/4" BORDER

- 2. Provide the same message on both sides of each sign.
- 3. All sign faces shall be completely reflectorized with Type "B" reflective sheeting.
- 4. The sign shall be in conformance with the requirements of Section 712.20 of the Standard Specification.
- 5. Colors:

Legend - White (Reflectorized) Background - Green (Reflectorized)

└2" RADIUS, TYP.

- 6. All signs shall conform to section 621 of the Standard Specifications and the latest editions and amendments of the following FHWA publications: a. "Manual on Uniform Traffic Control Devices for Streets and Highways" (MUTCD)
  - b. "Standard Highway Signs"

c. "Standard Alphabéts for Highway Signs"

**DATE: MAY 1999**