

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ADDENDUM NO. 1

FOR


**KAUMUALII HIGHWAY AND KUHIO HIGHWAY
MISCELLANEOUS PAVEMENT RECONSTRUCTION / RESURFACING
AT VARIOUS LOCATIONS
PROJECT NO. HWY-K-03-04M
DISTRICTS OF WAIMEA, LIHUE, KAWAIHAU AND HANAIEI
ISLAND OF KAUAI
2004**

Amend the **SPECIAL PROVISIONS** as follows:

1. SPECIAL PROVISIONS

- a. Replace page 104-7a dated 3/18/04 with the attached page 104-7a dated 5/18/04.

Please acknowledge receipt of this Addendum No. 1 by recording the date of its receipt in the space provided on page P-4 of the Proposal.

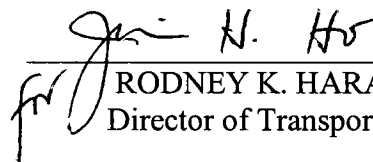

RODNEY K. HARAGA
Director of Transportation

HWY-K-03-04M

Construct, install, maintain, and remove two advisory signs on each of the following three work sites (a total of 6 advisory signs required for the entire project):

1. Kaumualii Highway – Kipu Road intersection
2. Wailua Bridge approaches and Kuhio Highway – Kuamoo Road intersection (considered as one work site)
3. Kuhio Highway (Route 560) at Mile Post 5.35

Place the signs within the project limits. The signs shall have black letters on orange background. The minimum size of the signs shall be four feet high by eight feet wide.

The sign message shall include the starting date, hours, limits and duration of construction. The height of the letters shall be 8 inches, Series D. If accepted by the Engineer, the Contractor may use a minimum height of 6 inches, Series D. The Engineer will review and accept the advisory sign wording before installing. Install the advisory sign two weeks before the start of construction.

Take measures necessary to insure that safe and easily accessible passage is provided for pedestrians who must travel in or near the construction zone.

The Engineer will consider payment for furnishing, placing, maintaining and removing the advisory signs and insuring safe and accessible passage for pedestrians included in the bid price of the various contract items. The Engineer will pay additional advisory signs as specified by the Engineer under Additional Police Officers and/or Additional Traffic Control Devices.

Submit requests for review and acceptance of detours and lane closures that will impact traffic during peak hours before scheduling the work to begin as follows:

- (1) detours - 8 weeks, and
- (2) lane closures - 6 weeks.

Also, these requests shall include:

- (1) An explanation of proposed changes to the existing traffic pattern;
- (2) A schedule of when installing informational and traffic control signs;
- (3) A schedule of when publishing advertisements;
- (4) A plan showing the proposed informational and traffic control signs; and
- (5) A plan showing the lane changes or detours. Plans for multi-lane highway lane changes and detours shall include details of the beginning of the lane changes or detours.