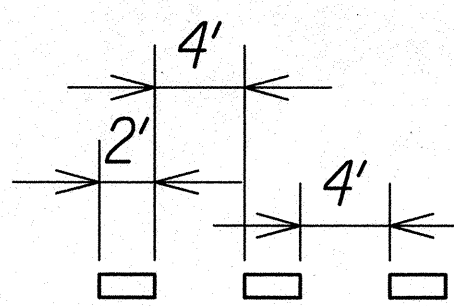
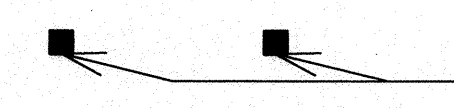

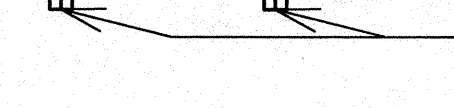
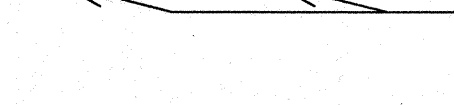


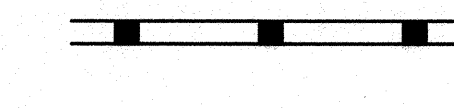


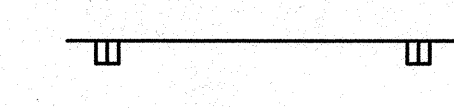
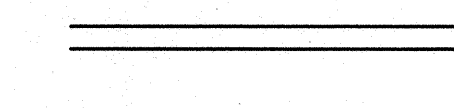
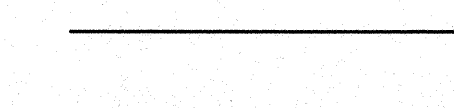

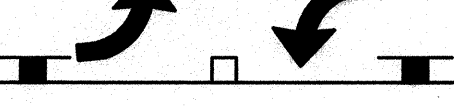
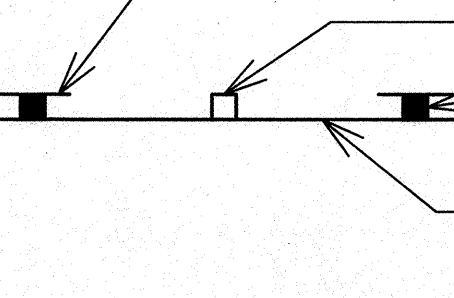
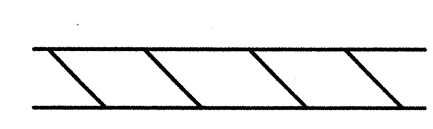
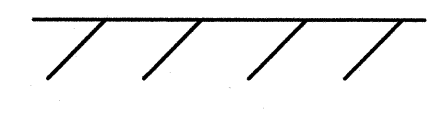
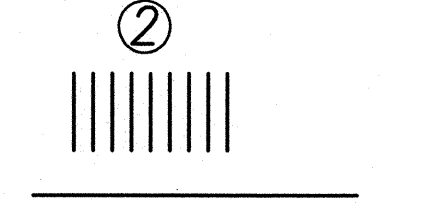


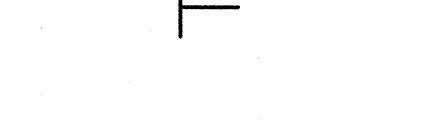


**PAVEMENT MARKING LEGEND:**

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	NH-072-1(53)	2015	59	117

-  4" White Guide Line (Tape, Type I or Thermoplastic Extrusion)
-  Type H Raised Pavement Markers @ 20'-0" o.c.
-  Type J Raised Pavement Markers @ 20'-0" o.c.
-  Type C Raised Pavement Markers @ 40'-0" o.c.
-  Type D Raised Pavement Markers @ 20'-0" o.c.
-  8" White Stripe with Type C Raised Pavement Markers @ 40'-0" o.c. (Tape, Type I or Thermoplastic Extrusion)
-  4" Double Solid Yellow with Type D Raised Pavement Markers @ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
-  4" Double Solid Yellow with Type H Raised Pavement Markers @ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
-  Type J Raised Pavement Markers @ 20'-0" o.c.  
4" Double Solid Yellow with Type D Raised Pavement Markers @ 20'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
-  Type D Raised Pavement Markers @ 20'-0" o.c.
-  4" White Edge Stripe with Type C Raised Pavement Markers @ 40'-0" o.c. (Tape, Type II or Thermoplastic Extrusion)
-  4" Double Solid Yellow (Tape, Type III or Thermoplastic Extrusion except for bus bays)
-  8" Solid Yellow (Tape, Type II or Thermoplastic Extrusion except for bus bays)
-  Channelizing Island or Deceleration Lane Gore (Tape, Type II or Thermoplastic Extrusion)
-  Two-way Left Turn Markings
-  4 Each Type J Raised Pavement Markers  
Type D Raised Pavement Markers @ 40'-0" o.c.  
Type H Raised Pavement Markers (Reflective Surface facing no-passing direction)  
4" Single Solid Yellow Stripe (Tape, Type I or Thermoplastic Extrusion)

-  Transverse Median Marking (Tape, Type III or Thermoplastic Extrusion)
-  Transverse Shoulder Marking (Tape, Type III or Thermoplastic Extrusion)
-  Crosswalk and Stop Line. All Stop Lines shall be 10'-0" from Crosswalk unless otherwise noted. The circled number indicates the number of lanes for payment (Tape, Type III or Thermoplastic Extrusion)
-  Pavement Arrow (Tape, Type III or Thermoplastic Extrusion)
-  Pavement Word (Tape, Type III or Thermoplastic Extrusion)
-  4'-0" Flexible Delineator Post with RU-2 Marker

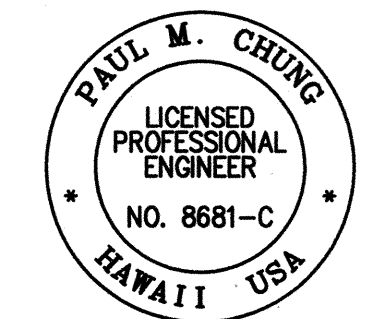
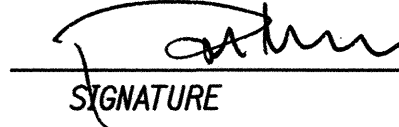
**NOTES:**

1. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
2. Existing pavement markings and striping not incorporated in the final traffic pattern shall be removed as directed by the Engineer. The removal of the existing pavement markings shall not be paid for separately and shall be considered incidental to the various pavement marking items.
3. Raised pavement markers shall not be installed within crosswalks.
4. Final locations of all signs shall be approved by the Engineer prior to any installation work.
5. Existing signs not shown on these plans shall remain as posted unless otherwise directed by the Engineer. Removal and disposal of existing signs and/or posts as designated on these plans or directed by the Engineer shall not be paid for and shall be considered incidental to the various signing items.
6. Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
7. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
8. Removal of Existing Delineators and Posts as directed by the Engineer shall be considered incidental to the various signing items.
9. Existing signs that are to be replaced shall not be removed until new signs are installed as replacements, or the messages are no longer necessary. The Contractor shall remove, clean and deliver the signs and posts to the Oahu District Baseyard or as directed by the Engineer.

10. Backing for all new regulatory and warning signs shall not be spliced.
11. All sign panels shall conform to the latest editions and amendments of the following FHWA publications:
  - a. "Manual on Uniform Traffic Control Devices for Street and Highways" (MUTCD)
  - b. "Standard Highway Signs"
  - c. "Standard Alphabet for Highway Signs"
12. All new and relocated signs and markers installed on pipe post or light standard are to be mounted with band brackets and steel braces.
13. The Contractor shall erect at the beginning of the project and at the end of the project advance construction warning signs as indicated on the plans or as directed by the Engineer for the duration of the highway project and shall be maintained by the Contractor and will be considered incidental to Item No. 645.0100. These signs shall be placed in addition to the required traffic control signs called for in Section 645-Work Zone Traffic Control. The advance construction warning signs shall be new and become the property of the State. The Contractor shall remove, clean, and deliver the signs and posts to the Oahu District Baseyard or as directed by the Engineer at the end of the project.

W:\CIVIL 3D PROJECTS\2008\_008\_000 DOT-HWY KAL HWY IMP WAIMANALO PH 1\059 - SIGNING AND PAV MARKING LEGEND AND NOTES.DWG 2/24/2015 4:48 PM

SURVEY PLOTTED BY	DATE
DRAWN BY	
TRACED BY	
NOTE BOOK	
DESIGNED BY	
CHECKED BY	
No.	

  
 THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION  
      04/30/16  
 SIGNATURE      EXPIRATION DATE OF THE LICENSE

STATE OF HAWAII  
 DEPARTMENT OF TRANSPORTATION  
 HIGHWAYS DIVISION  
**SIGNING AND PAVEMENT MARKING**  
**LEGEND AND NOTES**  
 KALANIANA'OLE HIGHWAY IMPROVEMENTS, PHASE 1  
 Olomana Golf Course To Vicinity of Poalima St.  
 Federal Aid Project No. NH-072-1(53)  
 Scale: AS NOTED      Date: Feb., 2015  
 SHEET No. C59 OF 71 SHEETS