




FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
	HAWAII	U-028-1(5)	1963	154	246
		U-028-1(4)	1963	66	66
		U-028-1(2)	1962	69	23



R1-1 30"x30"

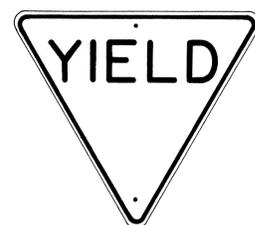

R1-2 36"x36"x36"
R1-2-E 48"x48"x48"
R1-2-I 60"x60"x60"



R2-1(50) 24"x30"
R2-1(50)-E 36"x48"
R2-1(50)-I 48"x60"




R2-2(40) 24"x24"
R2-2(40)-E 36"x36"
R2-2(40)-I 48"x48"




R2-4(40) 24"x30"
R2-4(40)-E 36"x48"
R2-4(40)-I 48"x60"



R2-5 24"x30"
R2-5-E 36"x48"
R2-5-I 48"x60"



R2-6(25) 24"x30"
R2-6(25)-E 36"x48"



R3-1 24"x30"
R3-1-E 36"x48"



R3-2 24"x30"
R3-2-E 36"x48"




R3-3 24"x24"



R3-4 24"x30"
R3-4-E 36"x48"
R3-4-I 48"x60"



R3-5(L) 30"x36"

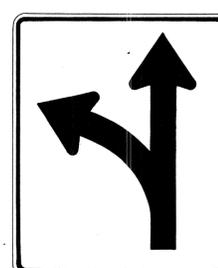

R3-6(L) 30"x36"

NOTE:

- The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
- All regulatory signs shall be reflectorized unless otherwise specified.
- All regulatory signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
- The suffix "E" denotes Expressway signs and "I" denotes Interstate signs.
- For R2 signs, number in () indicates speed and shall be as shown on the plans.
- (R) or (L) indicates right or left and shall be as shown on the plans.

APPROVED: _____ DATE: 1/22/62
DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
STANDARD DETAILS
REGULATORY SIGNS
Scale: 1" = 1'-0"

SHEET No. 1 OF 12 SHEETS

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
		U-078-(1)	1963	155	240
		U-078-(4)	1963	67	88
		F-080-(2)	1963	70	93



R3-7(L) 30"x30"



R3-7(R) 30"x30"



R3-8(L) 30"x30"




R4-1 24"x30"




R4-2 24"x30"




R4-3 24"x30"
R4-3-E 36"x48"
R4-3-I 48"x60"



R4-4 24"x30"
R4-4-E 36"x48"
R4-4-I 48"x60"



R4-5 24"x30"
R4-5-E 36"x48"



R4-6 24"x30"
R4-6-E 36"x48"




R4-7(R) 24"x30"
R4-7(R)-E 36"x48"



R4-7(L) 24"x30"
R4-7(L)-E 36"x48"



R5-1 24"x24"



R6-1(R) 36"x12"



R6-2(R) 18"x24"

NOTE:


1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
2. All regulatory signs shall be reflectorized unless otherwise specified.
3. All regulatory signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. The suffix "E" denotes Expressway signs and "I" denotes Interstate signs.
5. (R) or (L) indicates right or left and shall be as shown on the plans.

APPROVED: _____ DATE: 1/22/62
DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
STANDARD DETAILS
REGULATORY SIGNS
Scale: 1" = 1'-0"

SHEET No. 2 OF 12 SHEETS

FED. ROAD DIST. No.	STATE	FED. AID PROJ. No.	FISCAL YEAR	SHEET No.	TOTAL SHEETS
	HAWAII	U-07E-1 (8)	1963	156	246
		U-07E-1 (4)	1963	68	88
		U-07E-1 (2)	1963	71	73



R6-3 24"x30"



R6-4 24"x30"



R7-1 12"x18"



R7-4 12"x18"
R7-4-E 24"x30"



R7-107 12"x18"




R8-1 24"x30"
R8-1-E 36"x48"
R8-1-I 48"x60"



R8-2 24"x30"
R8-2-E 36"x48"



R8-3 24"x30"
R8-3-E 36"x48"



R8-4 24"x30"
R8-4-E 36"x48"
R8-4-I 48"x36"



R9-1 18"x24"



R9-2 12"x18"



R9-3 12"x18"



R9-4 12"x18"



R9-5 12"x18"



R9-7 9"x12"



R10-1 24"x30"
R10-1-E 36"x48"
R10-1-I 48"x60"

NOTE:


1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs" dated September 1961 unless otherwise specified.
2. All regulatory signs shall be reflectorized unless otherwise specified.
3. All regulatory signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. The suffix "E" denotes Expressway signs and "I" denotes Interstate signs.

APPROVED: _____ DATE: 1/22/62
DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
STANDARD DETAILS
REGULATORY SIGNS
Scale: 1" = 1'-0"

SHEET No. 3 OF 12 SHEETS


FED. ROAD DIST. No.	STATE	FISCAL YEAR	SHEET No.	TOTAL SHEETS
U-078-1(C)	HAWAII	1968	157	246
U-028-1(C)	HAWAII	1968	67	88
F-090-1(C)	HAWAII	1968	72	73

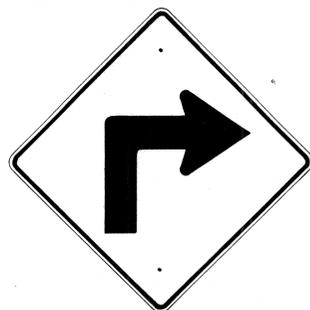


WI-1(R) 30" x 30"




WI-2(R) 30" x 30"

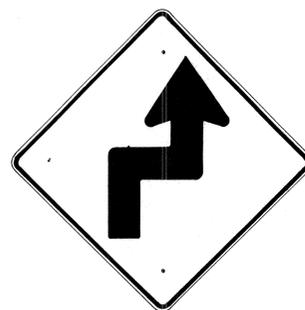


WI-3(R) 30" x 30"

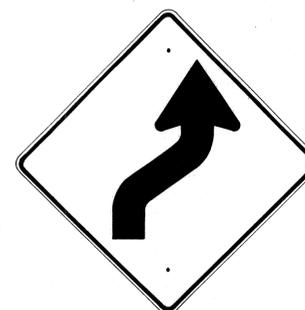


WI-4(R) 30" x 30"

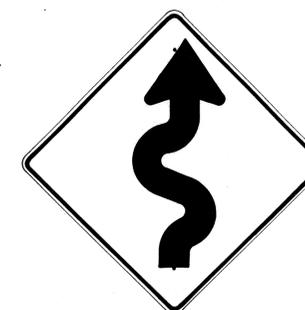


WI-5(R) 30" x 30"

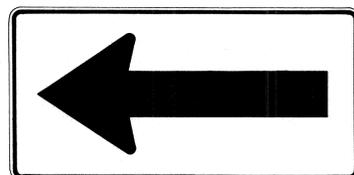


WI-6 48" x 24"

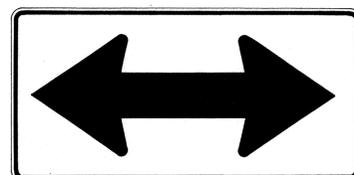


WI-7 48" x 24"

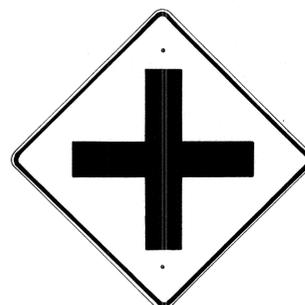


W2-1 30" x 30"

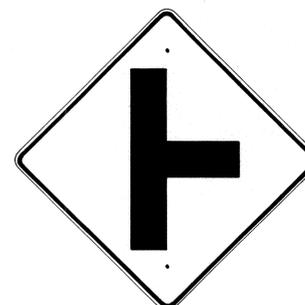


W2-2 30" x 30"

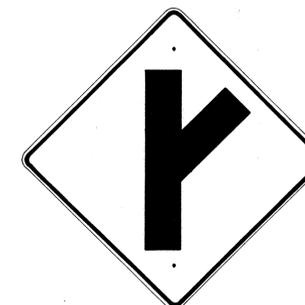

W2-3(R) 30" x 30"

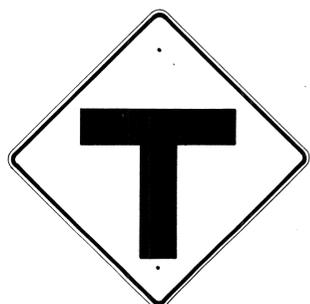

W2-4 30" x 30"

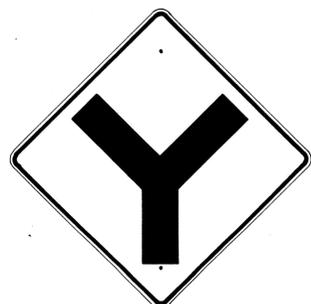

W2-5 30" x 30"



W3-1 30" x 30"



W3-2 30" x 30"

NOTE:

1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual Standard Highway Signs, dated September 1961 unless otherwise specified.
2. All warning signs shall be reflectorized unless otherwise specified.
3. All warning signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. (R) or (L) indicates right or left and shall be as shown on the plans.

APPROVED: _____ DATE: 1/22/62
 DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION
STANDARD DETAILS
WARNING SIGNS
 Scale: 1" = 1'-0"

SHEET No. 4 OF 12 SHEETS


FED. ROAD DIST. No.	STATE	FED. AID PROJ. No.	FISCAL YEAR	SHEET No.	TOTAL SHEETS
	HAWAII	U-072-1(2)	1963	158	240
		U-078-1(4)	1963	70	88
		U-079-1(2)	1963	73	93



W3-3 36" x 36"



W4-1 30" x 30"
W4-1-E 36" x 36"
W4-1-I 48" x 48"

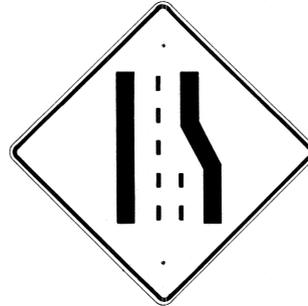

W4-2 30" x 30"
W4-2-E 36" x 36"



W5-1 30" x 30"
W5-1-E 36" x 36"



W5-2 30" x 30"



W5-3 30" x 30"



W6-1 36" x 36"



W6-2 36" x 36"



W7-1 30" x 30"



W8-1 30" x 30"



W8-2 30" x 30"



W8-3 30" x 30"



W8-4 30" x 30"



W8-5 30" x 30"

NOTE:


1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
2. All warning signs shall be reflectorized unless otherwise specified.
3. All warning signs shall have 3/8" bolt holes drilled at appropriate location unless otherwise noted.
4. The suffix "E" denotes Expressway signs and "I" denotes Interstate signs.

APPROVED: _____ DATE: 1/22/62
DIRECTOR OF TRANSPORTATION


STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
STANDARD DETAILS
WARNING SIGNS
Scale: 1" = 1'-0"

SHEET No. 5 OF 12 SHEETS


FED. ROAD DIST. No.	STATE	FED. AID PROJ. No.	FISCAL YEAR	SHEET No.	TOTAL SHEETS	
	HAWAII	HAW.	U-072-1(B)	1963	159	246
			U-078-1(A)	1963	71	88
			U-080-1(C)	1963	74	93

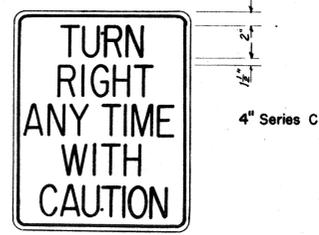

R15-1 24" x 30"

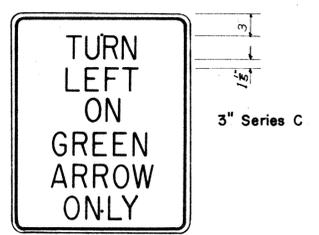

R16-1 24" x 30"

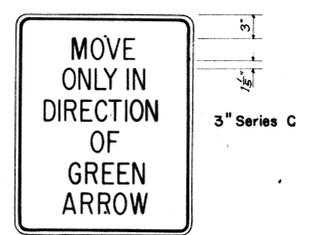

R16-2 24" x 30"



R17-1 18" x 24"




R17-2 18" x 24"




R18-1 30" x 24"




R19-1 18" x 24"

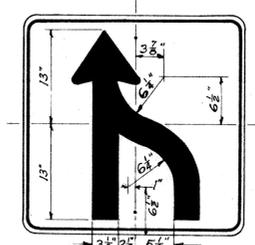


R3-9 30" x 30"

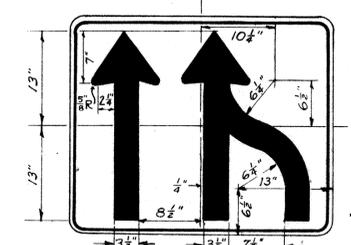

R3-10 36" x 30"




R7-201 12" x 6"
R7-201-E 24" x 12" (3" Series D)

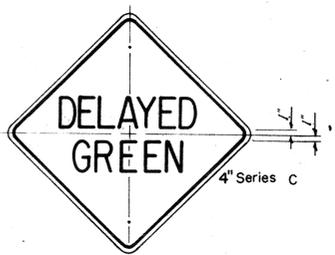

W15-1 24" x 24"



W15-2 24" x 24"

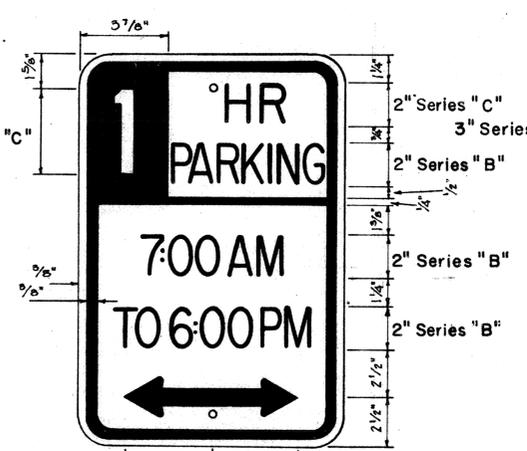

R7-108 12" x 18"
Scale: 3" = 1'-0"



R7-111 12" x 18"
Scale: 3" = 1'-0"

NOTE:
1. The shape, color, plate details, lettering and reflectorization of Regulatory signs (Prefix R) and Warning signs (Prefix W) shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
2. All regulatory and warning signs shall be reflectorized unless otherwise specified.
3. All regulatory and warning signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.

REVISED: February 28, 1963

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION
STANDARD DETAILS
MISCELLANEOUS
REGULATORY & WARNING SIGNS
Scale: 1" = 1'-0" Unless otherwise noted

APPROVED: _____ DATE 1/22/62
DIRECTOR OF TRANSPORTATION

SHEET No. 6 OF 12 SHEETS

FED. ROAD DIST. No.	STATE	FED. AID PROJ. No.	FISCAL YEAR	SHEET No.	TOTAL SHEETS
HAWAII	HAW.	U-078-1 (3)	1962	160	246
		U-078-1 (4)	1962	72	318
		U-078-1 (2)	1962	75	293



R10 - 2 48" x 30"



R10 - 4(10) 18" x 24"



R6 - 3 24" x 30"



W20 - 1a 48" x 48"



W20 - 2d 48" x 48"



W20 - 3b 48" x 48"



W20 - 4d 48" x 48"

NOTE:

1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
2. All signs shall be reflectorized unless otherwise specified.
3. All signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. For R10-4 sign, number in () indicates weight and shall be as shown on the plans.
5. For W20 series signs, suffixes a, b, c and d are as follows a 1500 FT, b 1000 FT, c 500 FT and d AHEAD.

APPROVED: _____ DATE 1/22/62
 DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION
STANDARD DETAILS
CONSTRUCTION SIGNS
 Scale: 1" = 1'-0"

1709010200.75


W09S10400.72

W07210300.160

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
	HAWAII	U-072-1(2)	1965	161	246
		U-072-1(4)	1965	73	28
		U-072-1(6)	1965	76	33



W20-5d(L) 48" x 48"

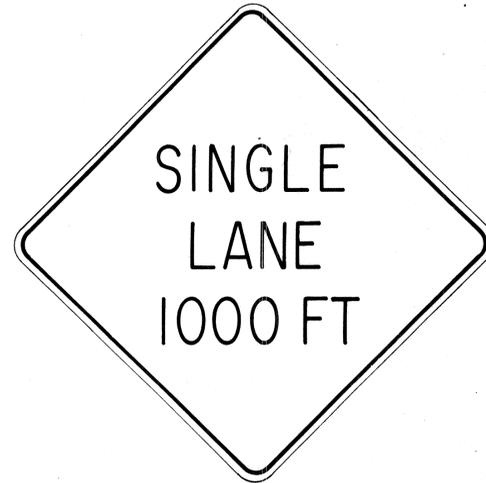

W20-6b 48" x 48"



W20-7c 48" x 48"



W21-1 30" x 30"



W21-2 24" x 24"



W21-3 36" x 36"



W21-4 30" x 30"

NOTE:

1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways," dated June 1961 and the BPR manual "Standard Highway Signs," dated September 1961 unless otherwise specified.
2. All signs shall be reflectorized unless otherwise specified.
3. All signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. For W20 series signs, suffixes a, b, c and d are as follows a 1500 FT, b 1000 FT, c 500 FT and d AHEAD.
5. (R) or (L) indicates right or left and shall be as shown on the plans.

APPROVED: _____ DATE 7/22/62
 DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION
STANDARD DETAILS
CONSTRUCTION SIGNS
 Scale: 1" = 1'-0"


PRO. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
	HAWAII	U-078-1(5)	1963	162	242
		U-078-1(4)	1963	74	83
		F-096-1(2)	1963	77	93



W21-5 30" x 30"




W21-6 30" x 30"

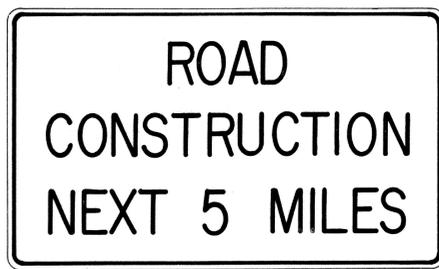

G20-1(5) 60" x 36"




G20-2 60" x 24"

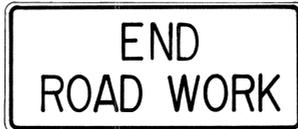

G20-3 42" x 18"



M5-7(L) 48" x 18"

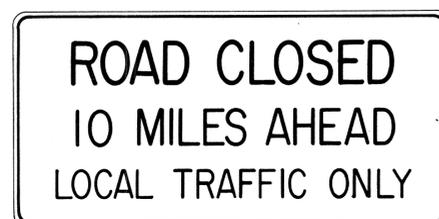

R10-3(10) 60" x 30"


NOTE:

1. The shape, color, dimensions, symbols, wording, lettering and reflectorization of all signs shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways", dated June 1961 and the BPR manual "Standard Highway Signs", dated September 1961 unless otherwise specified.
2. All signs shall be reflectorized unless otherwise specified.
3. All signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.
4. Number in () indicates miles and shall be as shown on the plans.
5. (R) or (L) indicates right or left and shall be as shown on the plans.


STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION
STANDARD DETAILS
CONSTRUCTION SIGNS
 Scale: 1" = 1'-0"

APPROVED: _____ DATE: 1/22/62
 DIRECTOR OF TRANSPORTATION


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
		U-072-1(3)	1963	103	246
		U-088-1(4)	1964	75	88
		E-050-1(2)	1965	78	93
HAWAII	HAW.				

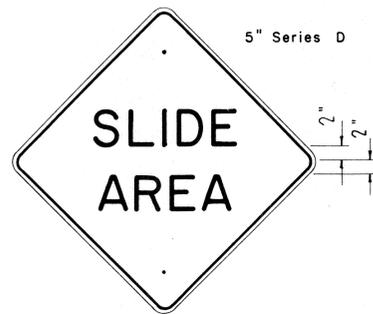

W 22 - 1 30" x 30"

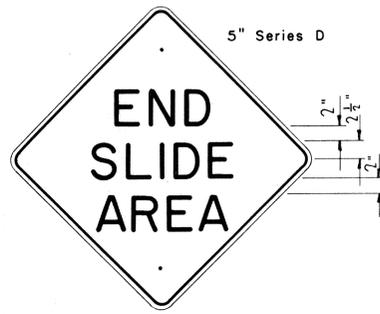

W 22 - 2 30" x 30"

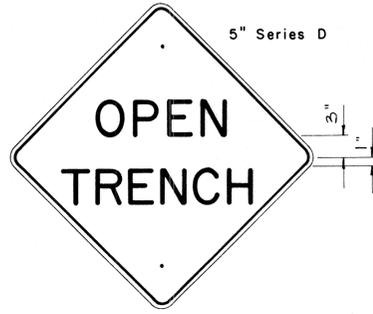

W 22 - 3 30" x 30"




W 8 - 7 30" x 30"




W 14 - 1 30" x 30"



W 7 - 2 48" x 48"

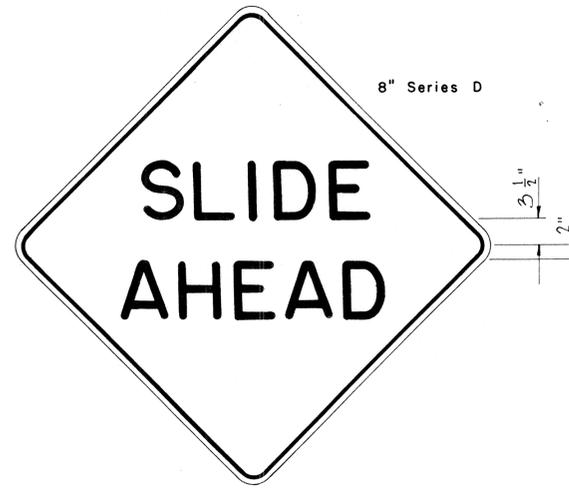


W 22 - 4 48" x 48"

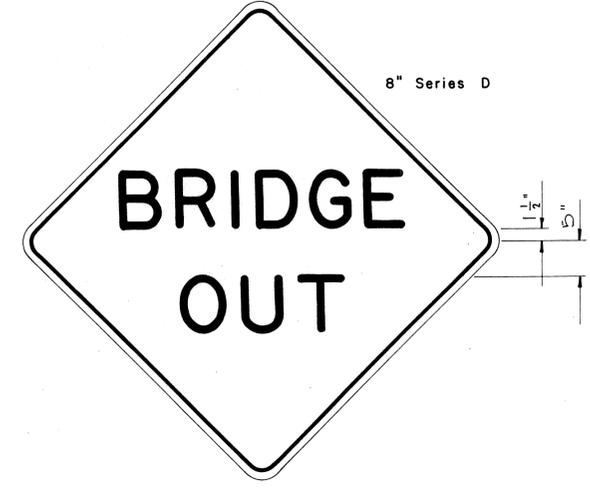

W 22 - 5 48" x 48"

ReflectORIZED White Letters on Black Background

6" Series D

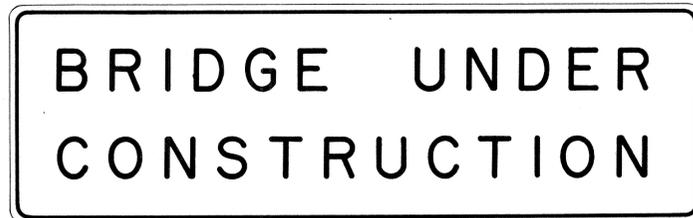

CW - 1 96" x 30"

NOTE:

1. The shape, color, plate details, lettering and reflectorization of Warning Signs (Prefix W) shall be in accordance with the "Manual on Uniform Traffic Control Devices for Streets and Highways", dated June 1961 and the BPR manual "Standard Highway Signs", dated September 1961 unless otherwise specified.
2. All signs shall be reflectorized unless otherwise specified.
3. All signs shall have 3/8" bolt holes drilled at appropriate locations unless otherwise noted.

DATE
SURVEY PLOTTED BY
DRAWN BY
DESIGNED BY
QUANTITIES BY
CHECKED BY
ORIGINAL PLAN
NOTE BOOK
No.

APPROVED:

DATE: 1/22/62

[Signature]
DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

STANDARD DETAILS
CONSTRUCTION SIGNS


Scale: 1" = 1' - 0"

SHEET No 10 OF 12 SHEETS


2/17/57

FED. ROAD DIST. NO.	STATE	FISCAL YEAR	PROJ. NO.	SHEET NO.	TOTAL SHEETS
4-078-10	HAWAII	1955	76	104	246
4-088-10	HAWAII	1955	76	25	25
4-093-10	HAWAII	1955	79	35	35



NOTE: Galv. 2" Conduits shall be supported by Band Hangers bolted to the top slab of Catch Basins. Pipe Hangers and bolts shall be incidental to item No. 4G(1) Class A-1 Concrete other than in Bridges.

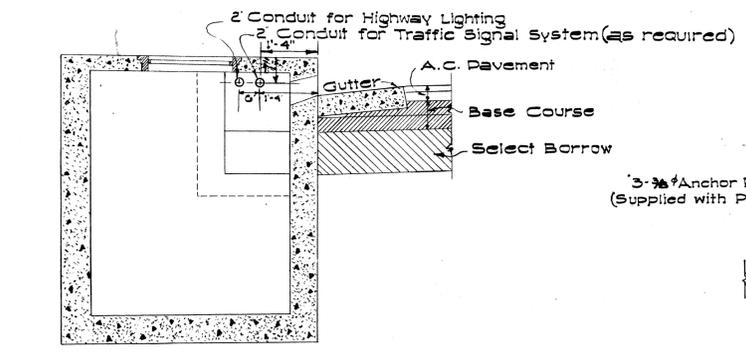


TYPICAL SECTION SHOWING CONDUITS PASSING THROUGH CATCH BASINS
Scale: 1/2" = 1'-0"

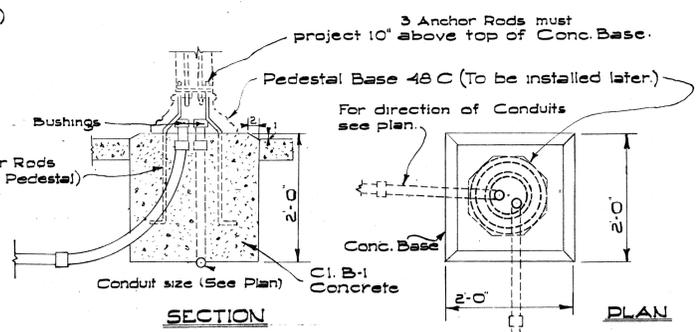


BASE FOR TRAFFIC SIGNAL POLES
Scale: 3/4" = 1'-0"

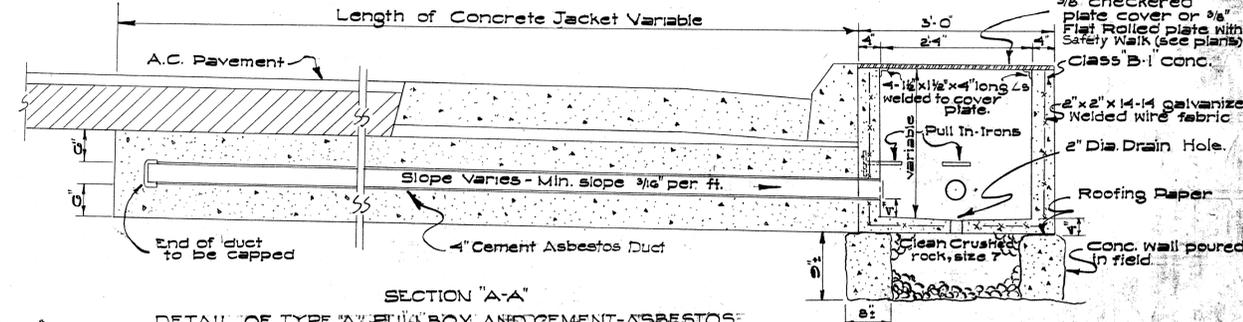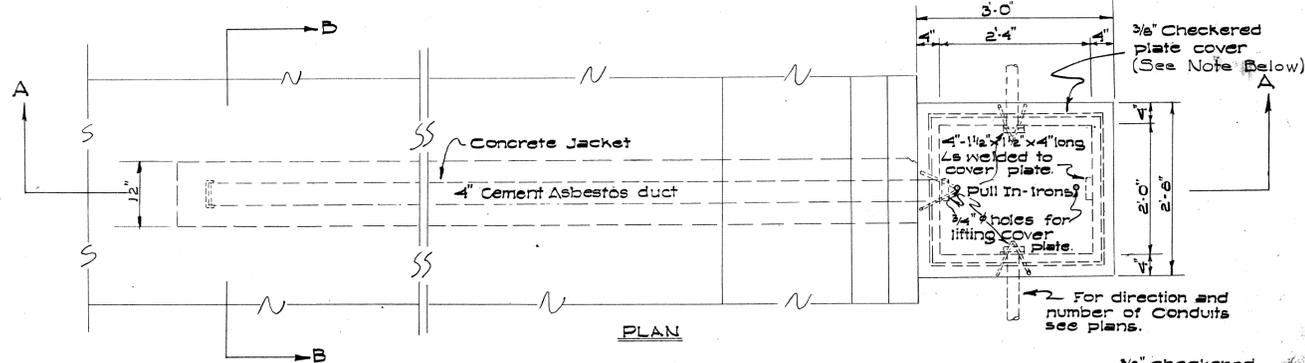


SECTION "A-A"
DETAIL OF TYPE "A" PULL BOX AND CEMENT-ASBESTOS DUCT FOR NON-DIRECTIONAL DETECTORS
Scale: 3/4" = 1'-0"

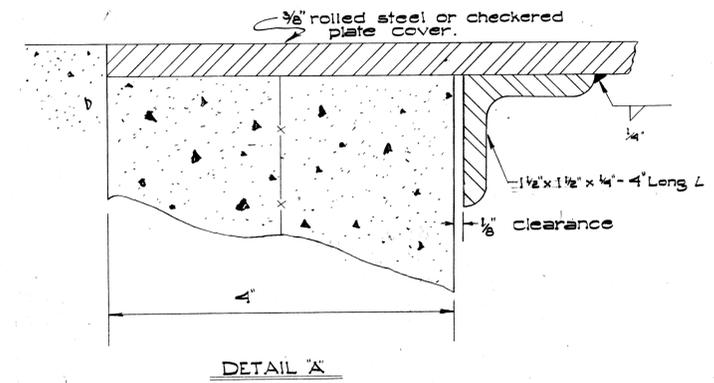


DETAIL "A"

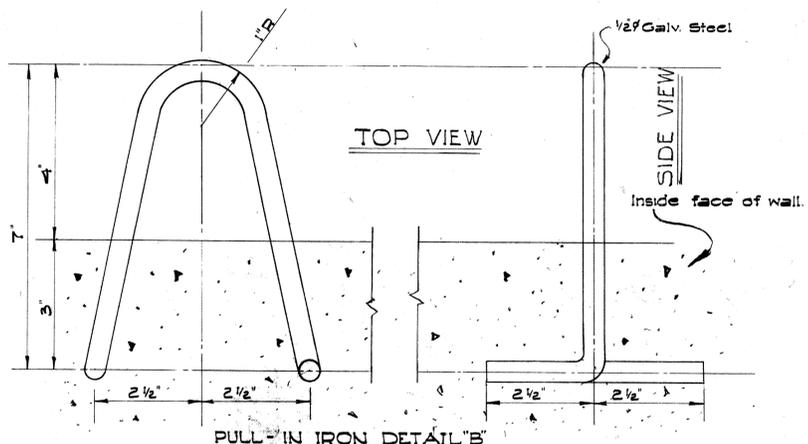


PULL-IN IRON DETAIL "B"
Scale: 1/2" = 1'-0"

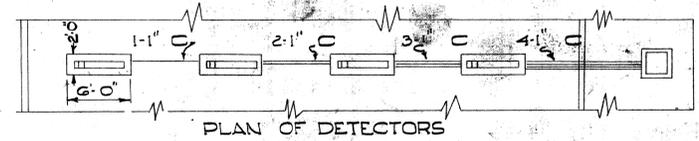

PLAN OF DETECTORS

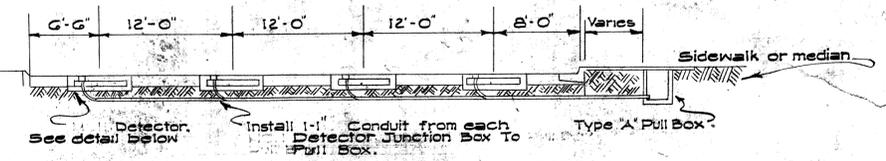


TYPICAL LAYOUT OF DIRECTIONAL DETECTORS IN CONCRETE JACKET
Scale: 1/8" = 1'-0"

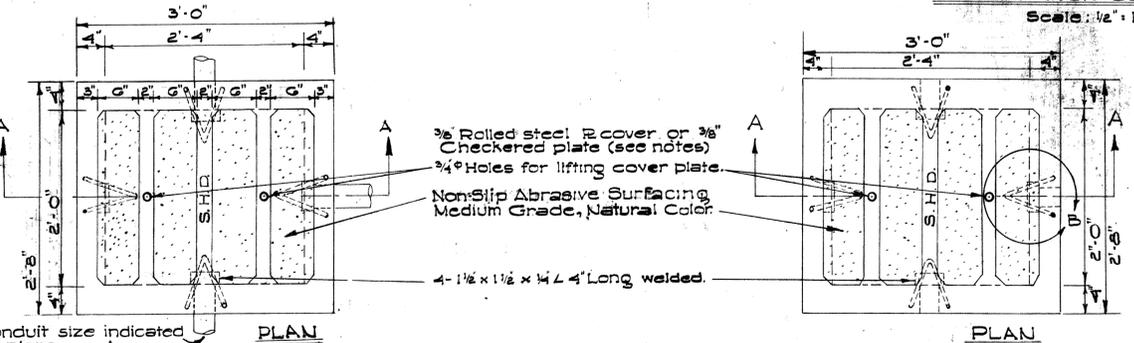

PLAN


PLAN

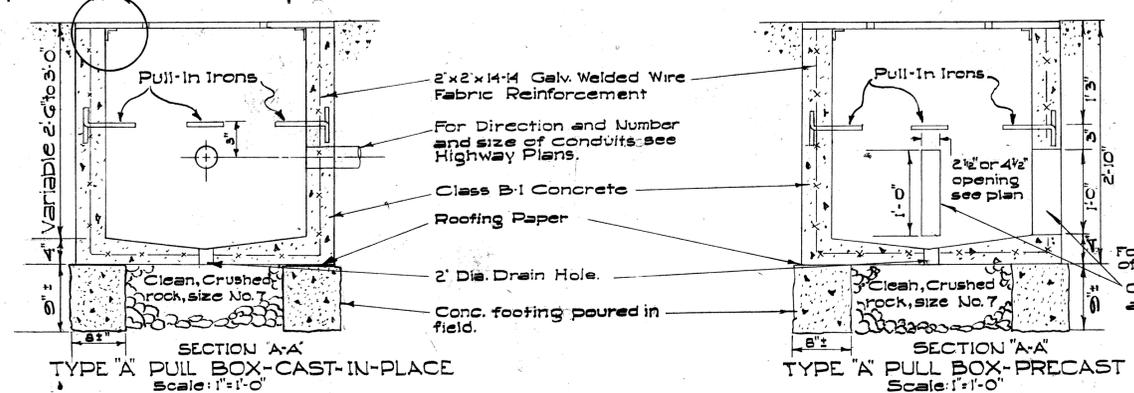

SECTION "A-A"
TYPE "A" PULL BOX-CAST-IN-PLACE
Scale: 1" = 1'-0"

SECTION "A-A"
TYPE "A" PULL BOX-PRECAST
Scale: 1" = 1'-0"

- NOTE:
1. 3/8" Rolled steel Plate Cover with non-slip Abrasive Surfacing Medium Grade, Natural Color shall be used on all Pull Boxes located on sidewalk areas where pedestrians are walking.
 2. 3/8" Checkered plate cover shall be used on median areas and other locations where there are no pedestrians walking.
 3. Pull Irons shall be placed opposite each conduit slot.
 4. Covers on all Pull Boxes located in sidewalk areas shall be set flush with the concrete sidewalk.
 5. Each Pull Box shall have a pair of pull irons opposite each other for lifting purposes.
- For direction and number and size of slots for conduits (see plan)
Grout Conduit Slot with 1:3 Cement Mortar after Conduit is placed.

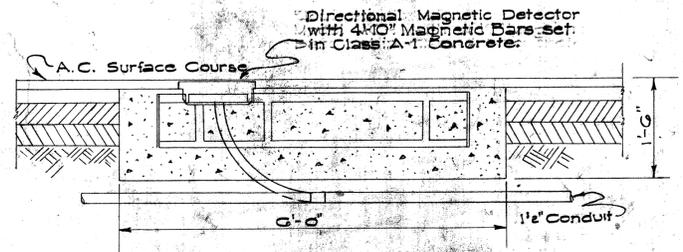

DETAIL OF DIRECTIONAL DETECTOR IN CONCRETE JACKET
Scale: 1/2" = 1'-0"

Note: Class "A-1" Concrete shall be used for Concrete Block.

APPROVED: _____ DATE: AUG 26, 1957
STATE HIGHWAY ENGINEER

DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
STATE OF HAWAII

STANDARD DETAILS
TRAFFIC SIGNAL SYSTEM
BASE, PULLBOX,
MAGNETIC DETECTORS






SHEET NO. 11 OF 12 SHEETS

SURVEY PLOTTED BY: _____ DATE: 7/11/57
 ORIGINAL PLAN DESIGNED BY: _____
 DRAWN BY: J. A. Narceli
 NOTE BOOK QUANTITIES BY: _____
 CHECKED BY: _____
 No. _____

10 109010200.79 U09810400.76 U07210300.164 124


NOTE:
 1. All signs and road delineators shall be placed 2' outside the usable roadway shoulder or 1' outside unmountable curbing present and within the limits shown below.
 2. Except as noted below, sign posts shall be 3" galv. std. pipe for signs larger than 24" in any dimension and 2" galv. std. pipe for signs not over 24" in any dimension, with two 5/8" φ bolt holes or adjustable band brackets.
 3. Sign shall be attached to post with 5/16" galvanized carriage bolts with nuts and 7/8" x 7/16" x .120 stainless-steel washers with neoprene rubber gasket.
 4. Clearance Markers (RM-4, RM-3) shall be installed with the inside edge of the marker in line with the inner edge of the obstruction.
 5. Signs 48" and wider or larger than 10 sq. ft. in area shall be mounted on two 3" galv. std. pipe with appropriate 3/8" bolt holes.

FED. ROAD DIST. No.	STATE	FED. AID PROJ. No.	FISCAL YEAR	SHEET No.	TOTAL SHEETS
HAWAII	HAW.	U-072-1(8)	1968	165	246
		U-078-1(4)	1963	77	93
		U-080-1(8)	1963	80	93

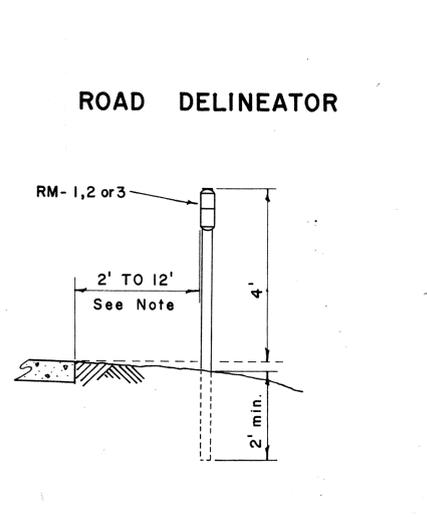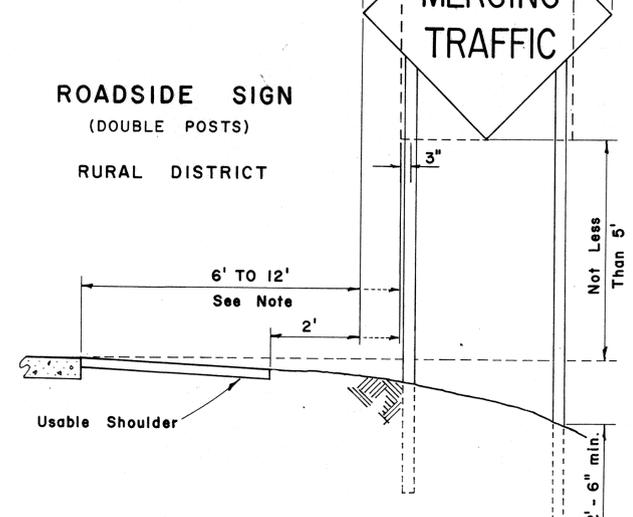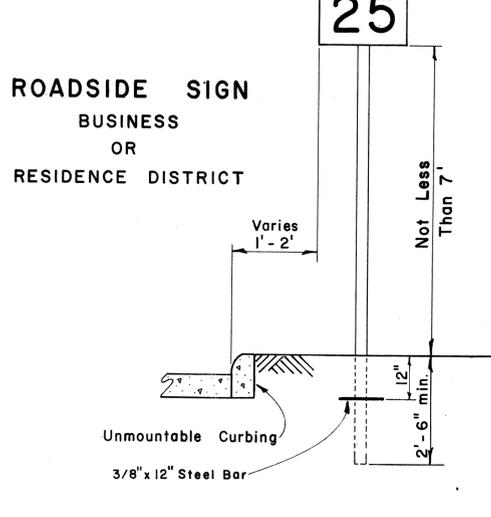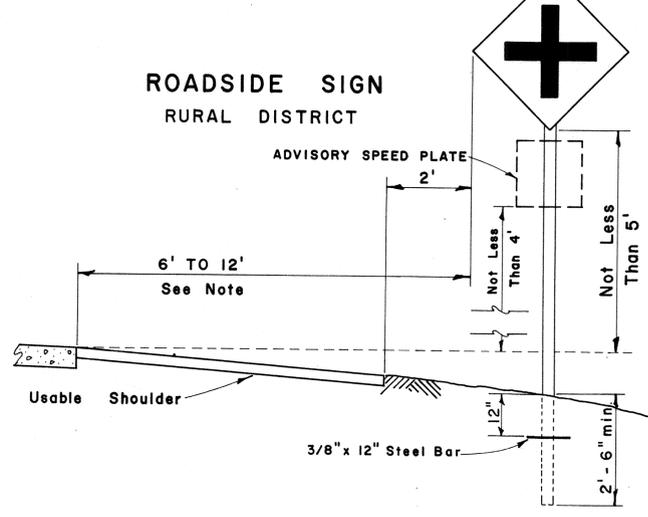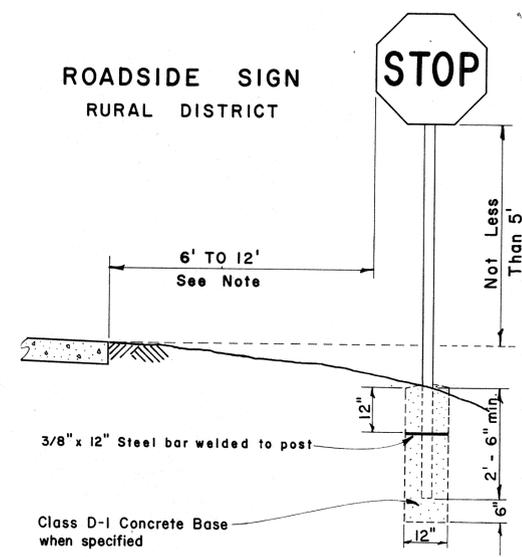


HEIGHT AND LATERAL LOCATION OF SIGNS - TYPICAL INSTALLATIONS


Scale: 1/2" = 1' - 0"

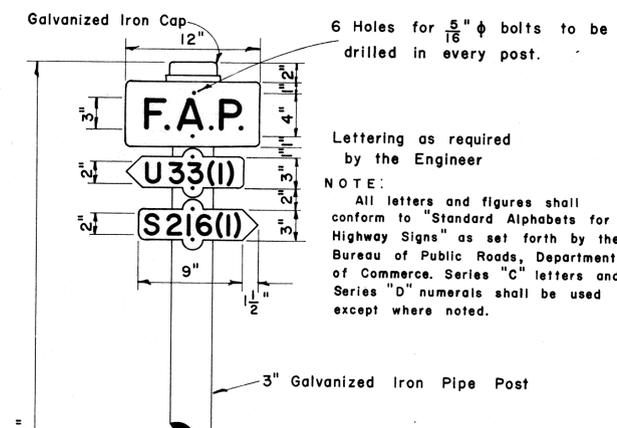


Lettering as required by the Engineer
 NOTE: All letters and figures shall conform to "Standard Alphabets for Highway Signs" as set forth by the Bureau of Public Roads, Department of Commerce. Series "C" letters and Series "D" numerals shall be used except where noted.

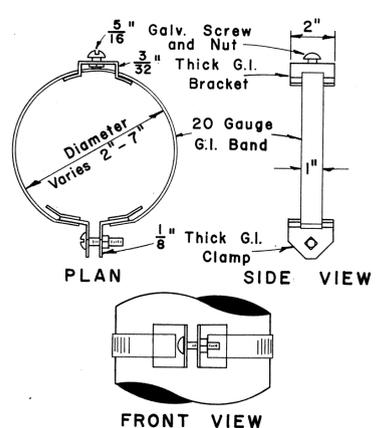


ADJUSTABLE BAND BRACKET FOR MOUNTING TRAFFIC SIGNS
 Scale: 3" = 1' - 0"

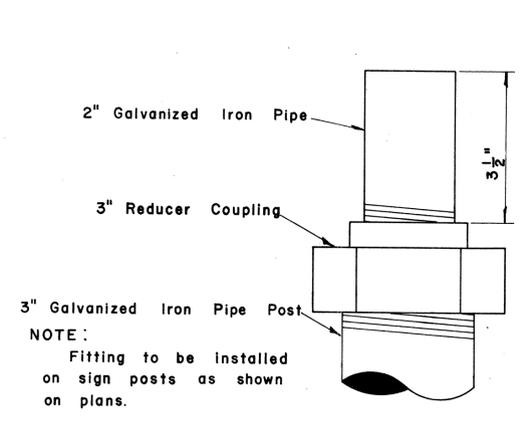


DETAIL OF SIGN POST FITTING FOR CITY & COUNTY STREET NAME SIGNS
 Scale: 1/2" = 1'

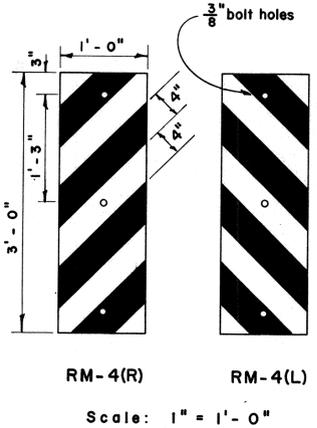

Scale: 1" = 1' - 0"

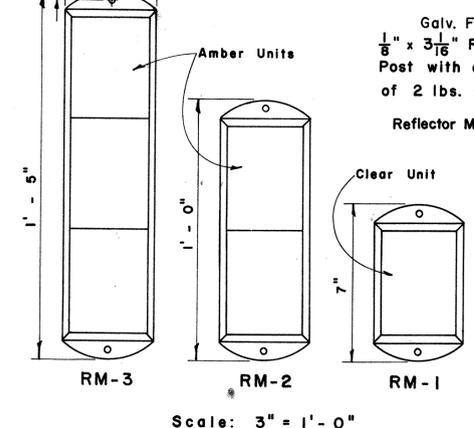


Scale: 3" = 1' - 0"

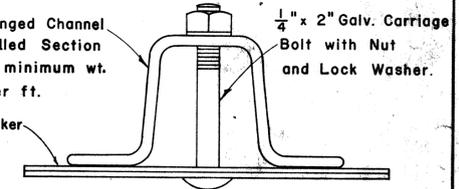


TYPICAL SECTION OF ROAD DELINEATOR
 Full Size

NOTE: Reflector Units for RM-1,2,3 shall be 4" x 5" in size and shall consist of reflective sheeting encapsulated in acrylic plastic.


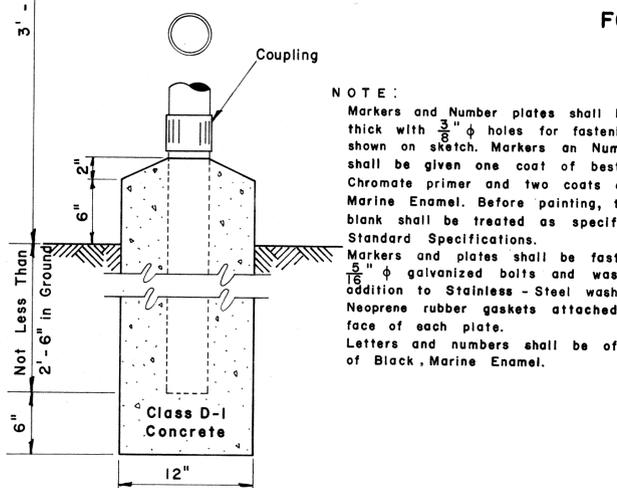


FEDERAL AID MARKER
 Scale: 1/2" = 1' - 0"

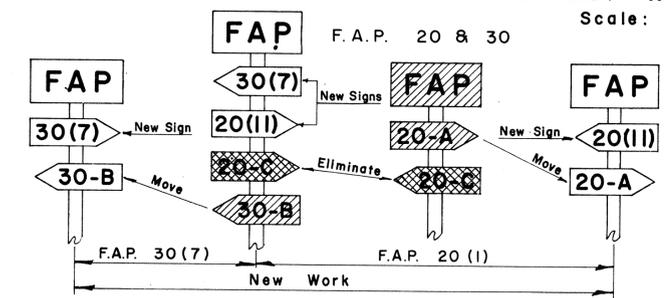

NOTE: Federal Aid Markers should be placed at the termini of suffix designated sections. Intermediate letter designated markers of adjacent sections located within the limits of new improvements should be moved to the terminl of the new work. The same procedure should be followed on each successive improvement until all markers for letter designated sections are eventually eliminated.

METHOD OF MARKING F.A. PROJECTS AT OVERLAPS (USING NUMBER SUFFIX ON NEW WORK)

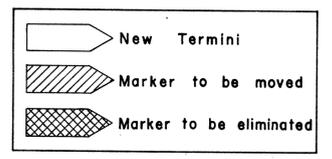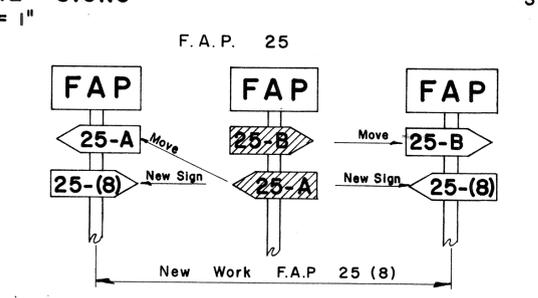

APPROVED: _____ DATE: 11/2/68
 DIRECTOR OF TRANSPORTATION

STATE OF HAWAII
 DEPARTMENT OF TRANSPORTATION
 HIGHWAYS DIVISION
STANDARD DETAILS
 F. A. MARKER
 AND
 MISCELLANEOUS SIGN
 DETAILS
 Scale: As Shown

1709010200.S0 W09S10400.77 W07210300.165 195