
## General Notes:


- 1. Pavement marking and striping shall conform to the latest "Manual on Uniform Traffic Control Devices for Streets and Highways" and as amended.
- 2. Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to installation work.
- 3. Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
- 4. Raised pavement markers shall not be installed within crosswalks.
- 5. Edge lines shall not be continued through intersections and shall not be broken for driveways unless otherwise shown or directed.
- 6. All pavement striping shall be as noted on the legend or plans.
- 7. All preformed pavement marking tapes over existing pavement shall be applied with an approved primer as recommended by the tape manufacturer and as approved by the Engineer. The primer shall be allowed to dry to the tacky stage prior to tape application.
- 8. Thermoplastic material shall be an alkyd-based compound formulated for profiled pavement marking. See specs subsection 629.03 for additional requirements.
- 9. Install white profiled thermoplastic stripes as lane line.
- 10. Pavement marking alphabets, numbers and symbols shall conform to Federal Highway Administration Manual on Uniform Traffic Control Devices (MUTCD) and Standard Highway Signs (SHS), and as amended on Standard Plan TE-30 and TE-31.

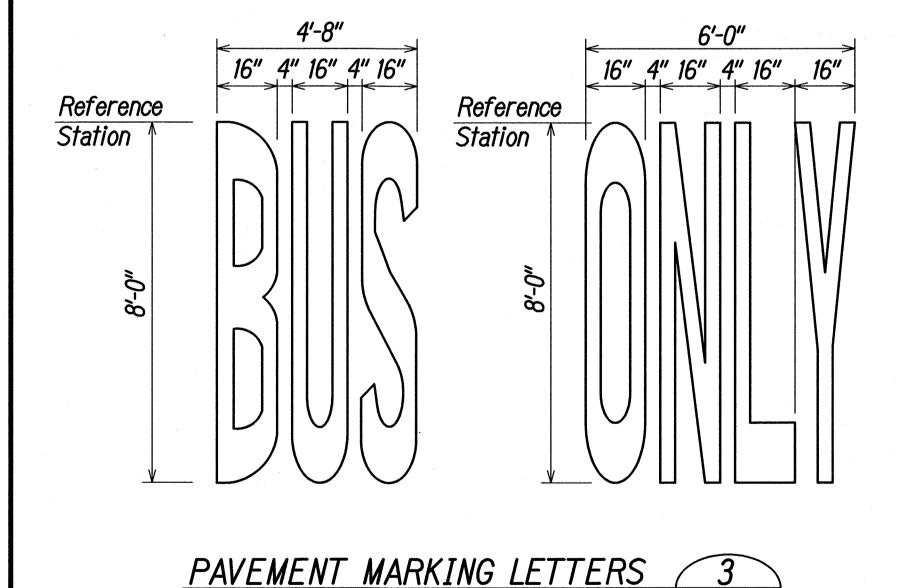


40'-0" O.C. As Shown on Plans

LANE LINE

NOT TO SCALE

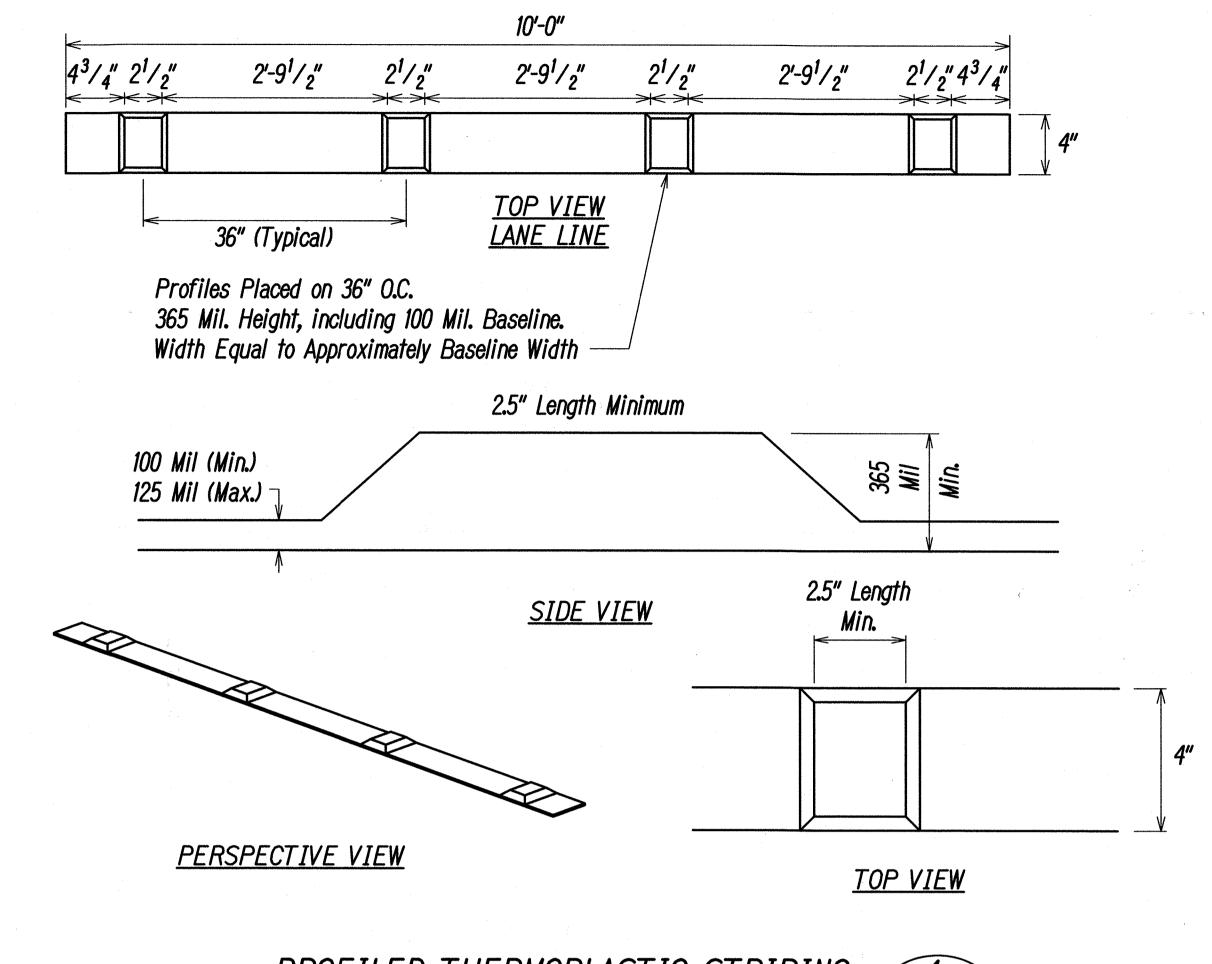

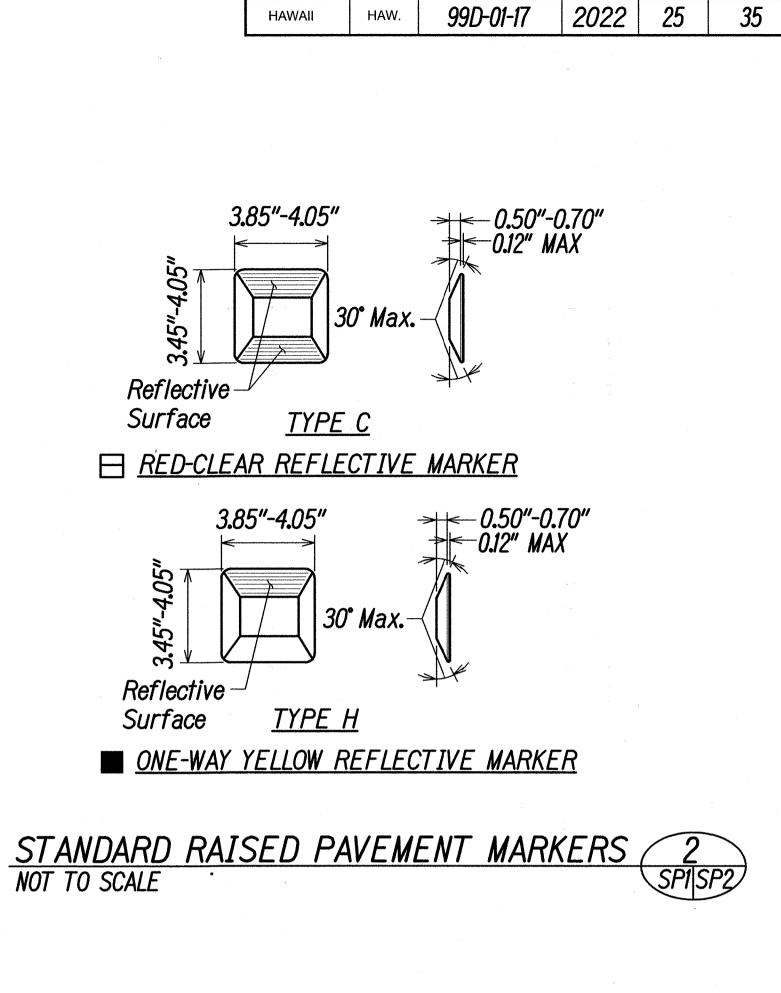

FED. ROAD DIST. NO.


STATE

FISCAL YEAR

PROJ. NO.

SHEET NO.



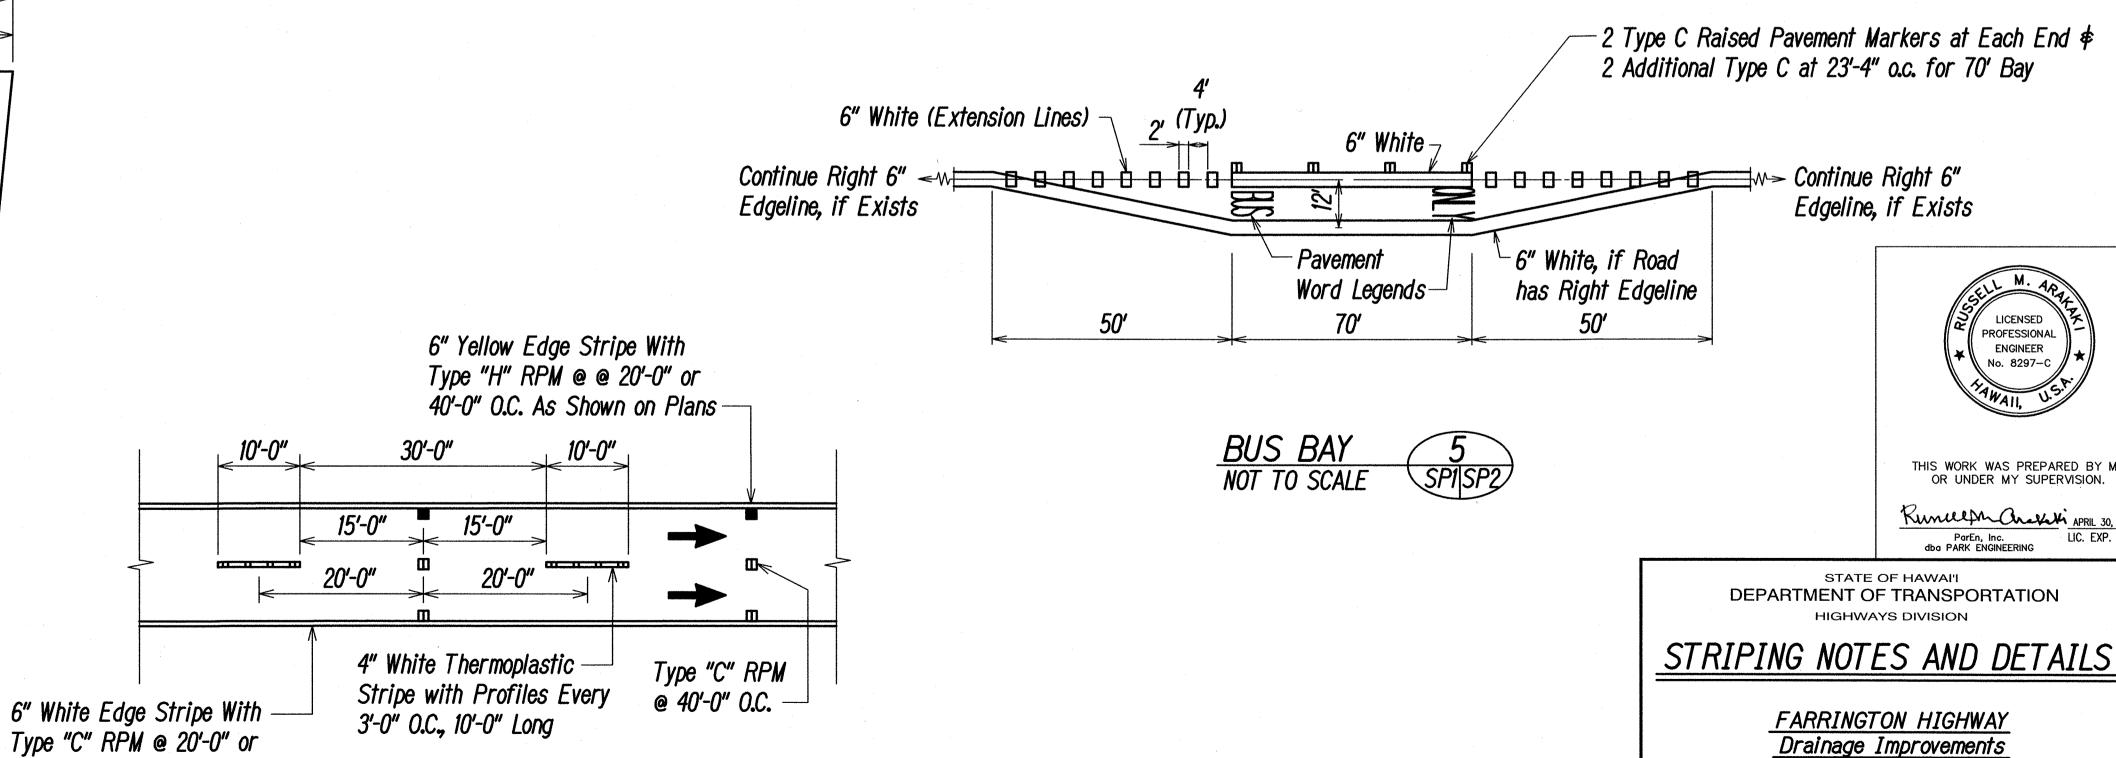

Date: June 2021

ENGINEER No. 8297-C

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION.

Runcel Marketi APRIL 30, 2027

ParEn, Inc. dba PARK ENGINEERING

Vicinity of Leeward Community College

PROJECT NO. 99D-01-17

SHEET No. SP2 OF SP2 SHEETS

Scale: As Shown