




































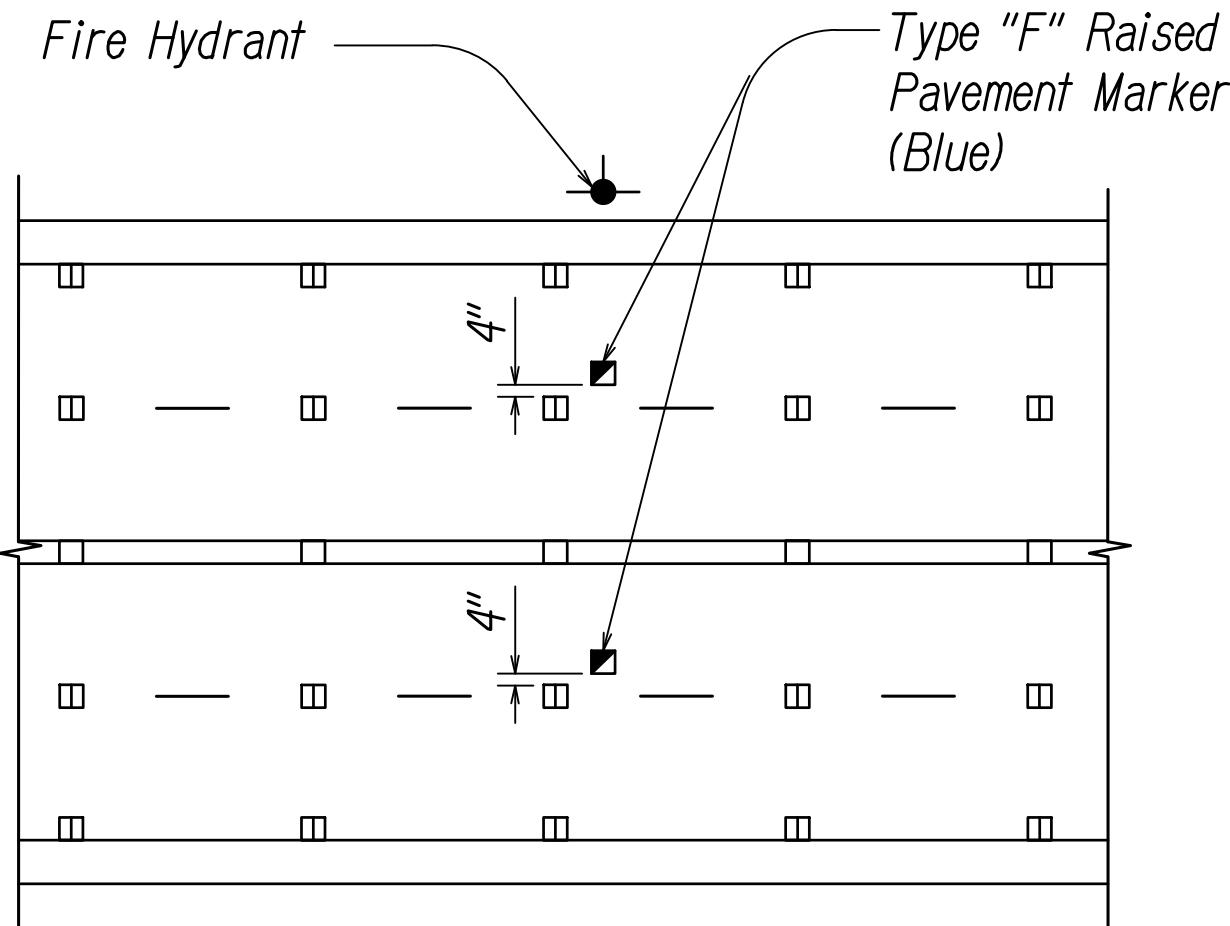
FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW	NH-099-1(031)	2020	46	125

LEGEND

- 
- 4" White Stripe @ 40'-0" o.c. (Thermoplastic Extrusion)
Type C Raised Pavement Markers @ 40'-0" o.c.
- 
- 4" Yellow Stripe @ 40'-0" o.c. (Thermoplastic Extrusion)
Type D Raised Pavement Markers @ 40'-0" o.c.
- 
- 8" White Stripe with Type C Raised Pavement Markers @ 20'-0" o.c. (Thermoplastic Extrusion)
- 
- 4" Double Solid Yellow with Type D Raised Pavement Markers @ 20'-0" o.c. (Thermoplastic Extrusion)
- 
- 4" Double Solid Yellow Stripes with Type H Raised Pavement Markers @ 20'-0" o.c. (Thermoplastic Extrusion)
- 
- 6" Yellow Edge Stripe with Type H Raised Pavement Markers @ 40'-0" o.c. (Thermoplastic Extrusion)
- 
- 4" Double Solid White Stripes with Type C Raised Pavement Markers @ 20'-0" o.c. (Thermoplastic Extrusion)
- 
- Lane Change Restriction Marking
4" White Stripe (Thermoplastic Extrusion) @ 40'-0" o.c.
Type C Raised Pavement Markers @ 20'-0" o.c.
4" White Stripe (Thermoplastic Extrusion)
- 
- 6" or 8" White Edge Stripe with Type C Raised Pavement Markers @ 40'-0" o.c. (Thermoplastic Extrusion)
- 
- 4" White Stripe (Thermoplastic Extrusion)
- 
- Transverse Median Marking (Thermoplastic Extrusion)
- 
- Transverse Shoulder Marking (Thermoplastic Extrusion)
- 
- Channelizing Island or Deceleration Lane Gore (Thermoplastic Extrusion)
- 
- Crosswalk and Stop Line. All Stop Lines shall be 10'-0" from Crosswalk unless otherwise noted. The circled number indicates the number of lanes for payment (Thermoplastic Extrusion)
- 
- Pavement Arrow (Thermoplastic Extrusion)
- 
- STOP Pavement Word (Thermoplastic Extrusion)
- 
- 4" Wide x 10'-0" Long Yellow Stripe (Thermoplastic Extrusion)
Type D Raised Pavement Markers @ 40'-0" o.c.
Type H Raised Pavement Markers (Reflective Surface facing no-passing direction)
- 
- 4" Single Solid Yellow Stripe (Thermoplastic Extrusion)
- 
- Extension of Edge Line, 4" Wide x 2'-0" Long White Stripe @ 10'-0" o.c. w/Type C Markers @ 40'-0" o.c. (Thermoplastic Extrusion)


NOTES

- Layout of pavement markings and striping shall be done by the Contractor and approved by the Engineer prior to any installation work.
- Existing pavement markings not incorporated in the final traffic pattern shall be removed as directed by the Engineer. Costs shall be incidental to the various pavement marking items.
- Raised pavement markers shall not be installed within crosswalks.
- Final locations of all Stop Lines shall be approved by the Engineer prior to installation.
- All pavement striping shall be as noted on the legend or plans.




FIRE HYDRANT MARKER LOCATION

Not to Scale

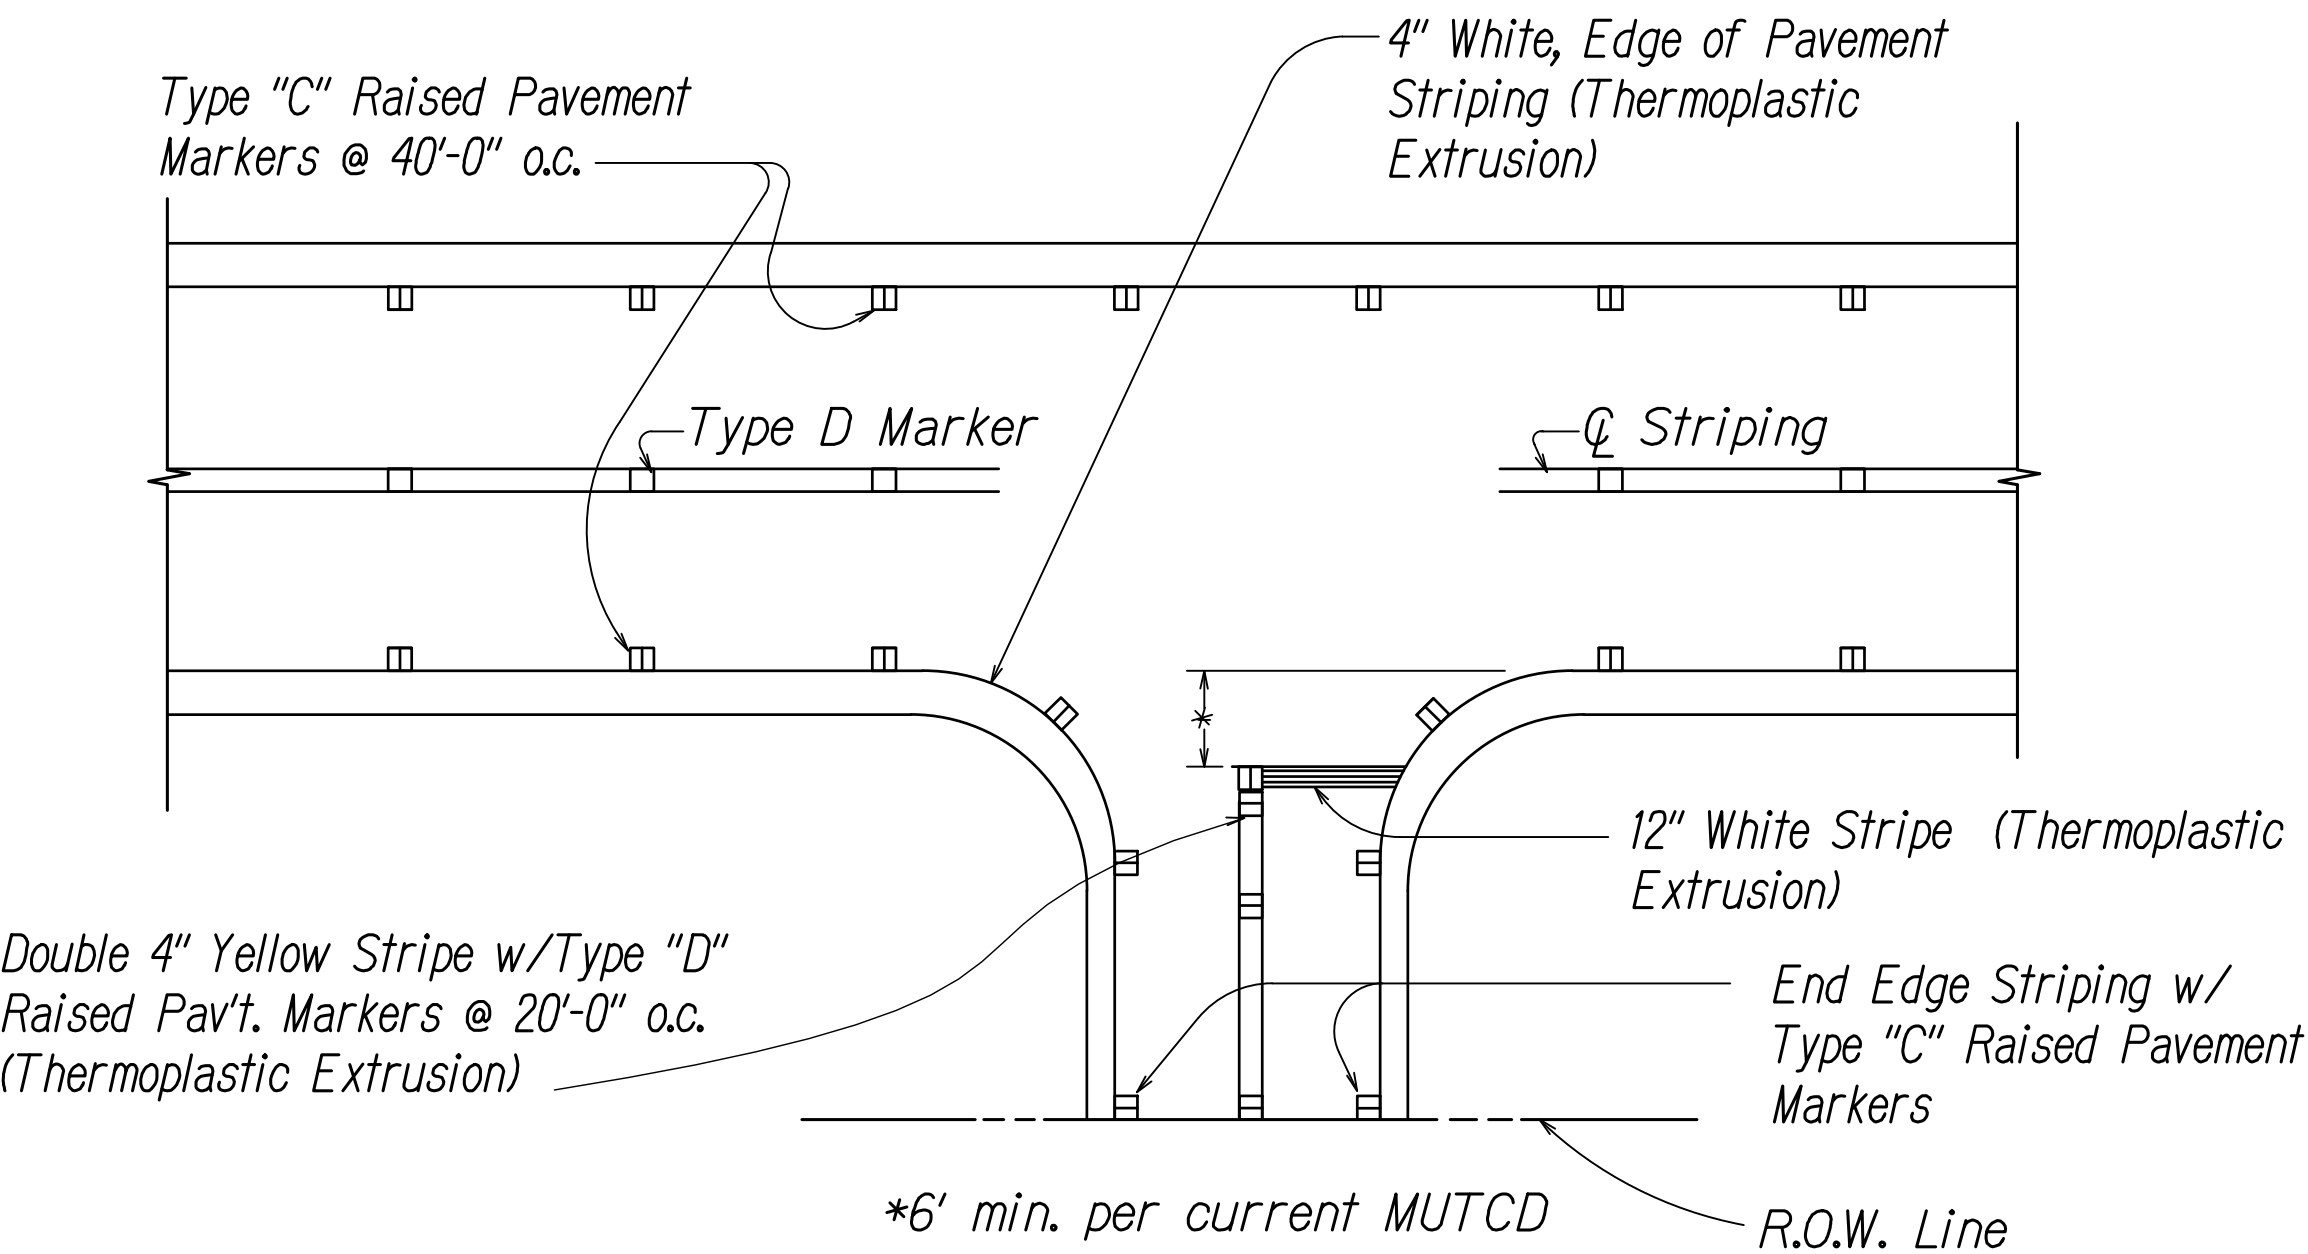

TYPICAL EDGE OF PAVEMENT MARKING

Not to Scale



This work was prepared by me or under my supervision

Chad M. McDonald
MITSUNAGA & ASSOCIATES, INC. EXP. DATE

NOTE: Contractor to check and verify dimensions at job before proceeding with work.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PAVEMENT MARKINGS

Kamehameha Hwy, Kamananui Rd and Wilikina Dr
Rehabilitation Weed Circle to Interstate Route H-2
Project No. NH-099-1(031)

Scale: As Noted Date: August 2020

SHEET No. **C44** OF **125** SHEETS