| FED. ROAD DIST. NO. | STATE | PROJ. NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|------------------------|-------|-------------|----------------|--------------|-----------------|
| HAWAII | HAW. | 7345A-01-91 | 1991 | 3 | 6 |


TRAFFIC SIGNAL NOTES


- 1. ALL TRAFFIC SIGNAL CONTROLLER EQUIPMENT SHALL BE COMPLETELY WIRED IN THE CABINET AND SHALL CONTROL THE TRAFFIC SIGNALS AS CALLED FOR IN THE PLANS.
- 2. SIGNAL INDICATIONS DURING CLEARANCE INTERVAL:
 - A. IF A SIGNAL IS G OR <G AND WILL REMAIN G OR <G DURING THE NEXT PHASE, IT SHALL BE G OR <G DURING THE CLEARANCE INTERVAL.
 - B. IF A SIGNAL IS G OR <G AND WILL BECOME R OR EXTINGUISHED DURING THE NEXT PHASE, IT SHALL BE Y OR <Y DURING THE CLEARANCE INTERVAL.
 - C. IF A SIGNAL IS R AND WILL REMAIN R OR BECOMES G DURING THE NEXT PHASE, IT SHALL REMAIN R DURING THE CLEARANCE INTERVAL.
- 3. A SOLID #8 BARE COPPER WIRE SHALL BE PULLED WITH THE TRAFFIC CONTROL CABLE FOR EQUIPMENT GROUND. COST SHALL BE INCIDENTAL TO THE INSTALLATION OF THE CONTROL CABLE.
- 4. CONTRACTOR SHALL INSTALL METER SOCKET AND BREAKER ON THE POWER POLE AS SHOWN ON PLANS IN ACCORDANCE WITH HECO REQUIREMENTS. METER SHALL BE MOUNTED BETWEEN 5' AND 7' ABOVE GROUND. METER SOCKETS SHALL BE 4-PRONG, COMPLETE WITH A MANUAL CIRCUIT CLOSING DEVICE.
- 5. THE LOOP AMPLIFIER UNITS FURNISHED FOR THIS PROJECT SHALL BE CAPABLE OF OPERATING THE LOOP DETECTOR CONFIGURATIONS SHOWN ON THE PLANS.
- 6. DETECTOR ASSIGNMENT SHALL BE PER CALIFORNIA DEPARTMENT OF TRANSPORTATION "TRAFFIC SIGNAL CONTROL LOCAL INTERSECTION PROGRAM," JULY 1978.
- 7. THE CONTRACTOR SHALL FURNISH 50 AMP CIRCUIT BREAKERS.

SL = STREET LIGHT

CONSTRUCTION NOTES

- 1. LOCATIONS OF EXISTING UNDERGROUND STRUCTURES AND UTILITIES SUCH AS PIPE—LINES, CONDUITS, CABLES, ETC., SHOWN ON PLANS ARE APPROXIMATE ONLY. IT IS NOT THE INTENT OF THESE PLANS TO SHOW THE EXACT LOCATION OF ALL UNDER—GROUND UTILITIES AND STRUCTURES. IT IS THE RESPONSIBILITY OF THE CONTRAC—TOR TO VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES WITH THE RESPECTIVE OWNERS. EXISTING UTILITIES DAMAGED BY THE CONTRACTOR SHALL BE REPAIRED BY THE CONTRACTOR AT HIS OWN COST.
- 2. THE LOCATIONS OF THE TRAFFIC SIGNAL STANDARDS, TRAFFIC SIGNAL STANDARDS WITH MAST—ARM, PEDESTRIAN PUSH BUTTONS, TRAFFIC CONTROLLER, PULLBOXES, CONDUITS AND LOOP DETECTORS SHALL BE STAKED OUT IN THE FIELD BY THE CONTRACTOR AND APPROVAL OF THE LOCATIONS SHALL BE OBTAINED FROM THE ENGINEER PRIOR TO CONSTRUCTON AND INSTALLATION.
- 3. ALL TRAFFIC SIGNAL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS," FEDERAL HIGHWAY ADMINISTRATION (1984) AND AMENDMENTS.
- 4. LOCATIONS OF TRAFFIC MARKINGS AND MARKERS (LANE LINES, STOP LINES, CROSS—WALK, ETC.) SHOWN ON THE PLANS SHALL BE VERIFIED WITH THE ENGINEER PRIOR TO THE INSTALLATION OF THE TRAFFIC SIGNAL SYSTEM.
- 5. MAINTENANCE OF TRAFFIC THROUGH THE CONSTRUCTION AREA SHALL BE IN ACCORDANCE WITH PART VI OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS," FEDERAL HIGHWAY ADMINISTRATION (1984) AND AS SPECIFIED IN THE SPECIAL PROVISIONS. THE CONTRACTOR SHALL FURNISH AND MAINTAIN ADEQUATE BARRICADES, BLINKERS, CONSTRUCTION SIGNS, ETC., FOR THE SAFETY OF THE MOTORING PUBLIC.
- 6. DEPARTMENT OF TRANSPORTATION SERVICES, CITY AND COUNTY OF HONOLULU, WILL ASSIST THE ENGINEER IN CONSTRUCTION INSPECTION FOR THE TRAFFIC SIGNAL SYSTEM.
- 7. WHERE REQUIRED BY THE PLANS, SIGNS AND/OR POSTS SHALL BE REMOVED. COSTS SHALL BE INCIDENTAL TO OTHER ITEMS OF WORK.

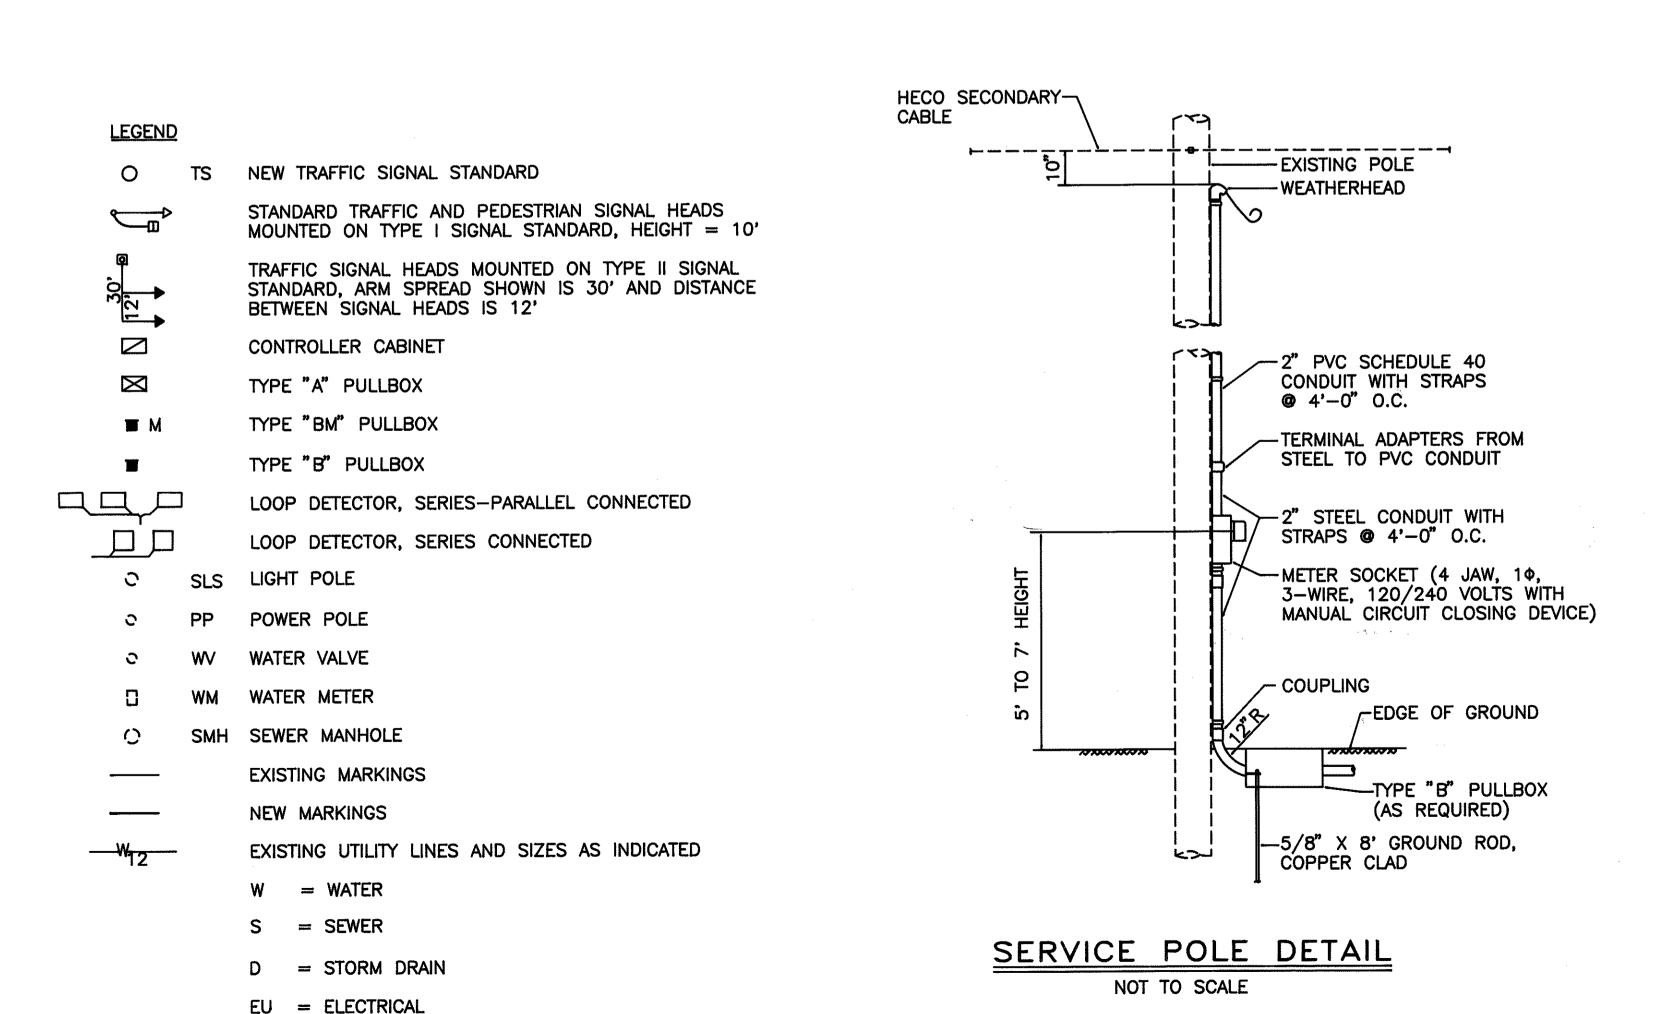

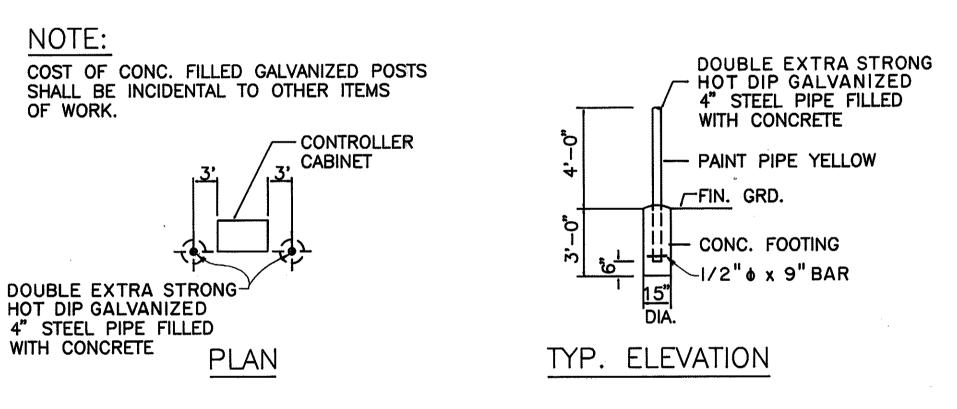

PIPE GUARD DETAIL NOT TO SCALE

EXIST. CONDUIT
ENCASED IN
CONCRETE

NO CLEARANCE
REQUIRED

ENCASE IN
CONCRETE

CONDUIT BY-PASS DETAIL

NOT TO SCALE

THIS WORK WAS PREPARED BY MB
OR UNDER MY SUPERVISION
Shordon & Kanchi and

ES. KAW

REGISTERED

PROFESSIONAL ENGINEER

No. 3244-C

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

LEGEND, NOTES AND DETAILS

JARRETT WHITE ROAD
TRAFFIC SIGNALS AT
ALA MAHAMOE STREET

PROJECT NO. 7345A-01-91

SCALE: AS NOTED DATE: AUGUST 1991

SHEET NO. 1 OF 1 SHEETS

10/24/91 8222D.DWG