













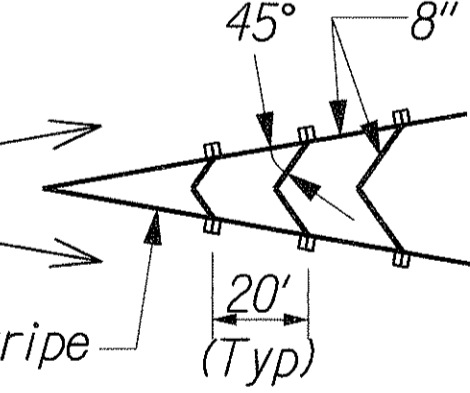

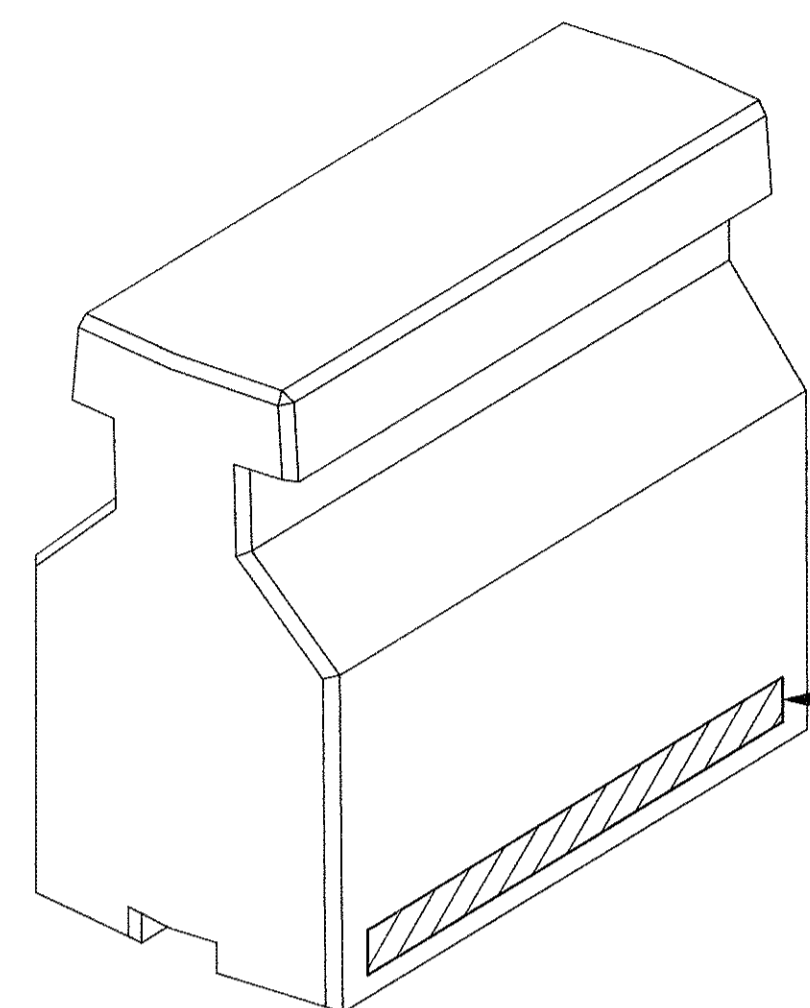


FED. ROAD DIST. NO.	STATE	FEDERAL AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	NH-HI-1(246)	2004	54	105

LEGEND:

-  4" White Edge Stripe
-  4" White Edge Stripe with 4 Type C Markers at 40'
-  4" Yellow Stripe with Type H Markers at 40'
-  4 Type A Markers and Type C Markers at 40'
-  8" White Stripe with Type C Markers at 20'
-  8" Yellow Stripe with Type H Markers at 20'
-  4" Yellow Guide Lines, 2' long at 6' o.c.
-  Type H Markers at 20' o.c. and 4 Type J Markers at 40' o.c. along existing edge stripe
-  New or Relocated Sign & Post
-  Existing Sign & Post
-  Direction of Traffic
-  Existing Pavement Arrow
-  Existing Traffic Cones
-  Traffic Cones
-  Channelizing Island
45°
8" Stripe
8" Stripe
20' (Typ)
-  Type II Barricade w/ Amber Flasher and Sandbag weights @ 5' o.c.



4" Yellow Stripe
(Tape, Type II or Thermoplastic Extrusion Both Sides of Barrier).
Payment shall be considered incidental to Item No. 694.1000 Concrete Movable Barrier - Installed.

STRIPING ON STATE-FURNISHED MOVABLE BARRIER
Not to Scale

SIGNING NOTES:

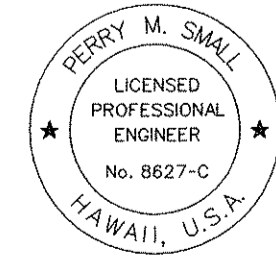
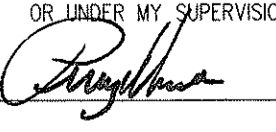
1. Sign details shall conform to the latest editions and amendments of the following FHWA publications: "Manual on Uniform Traffic Control Devices for Streets and Highways", "Standard Highway Signs" and "Standard Alphabets for Highway Signs".
2. For Miscellaneous Sign Details, see Standard Plan TE-01 to TE-18.
3. The Contractor shall backfill all holes, depressions and pits left by the removal of the existing signs with embankment material and grass all areas exposed in accordance with Specifications Section 618-Grassed Surfaces.
4. All existing signs shall remain unless noted. Removal of signs shall also include the removal of post and foundation to a minimum depth of 1-foot below the ground. Payment for the removal of signs shall be considered incidental to the various contract items.

PAVEMENT MARKING NOTES:

1. Pavement edge striping shall be reflective thermoplastic compound pavement markings or permanent preformed pavement marking tape Type II. Lane striping shall be reflective thermoplastic compound pavement markings or permanent preformed pavement marking tape Type I. Symbols, legends and intersection markings shall be reflective thermoplastic compound pavement markings or permanent preformed pavement marking tape Type III.
2. Location of pavement markers is shown schematically. For exact location of markers in relation to stripe, see Standard Plans TE-30, TE-31, TE-32 & TE-33.
3. The Contractor shall install a one inch White Barrier Guide Stripe, beginning at H-1 & Sta. 66+50 and ending at Nimitz Connector & Sta. 40+54.74, along the deployed barrier alignment shown on Plan Shts. C1 to C20. Dimensions shown for deployment are to the centerline of the barrier.

DESIGNED BY	DATE
PLANNED BY	
FRACED BY	
DESIGNED BY	
QUANTITIES BY	
CHECKED BY	
NO.	

\\ZIPPER_EXTENSION\SIGN\SS-NOTES.dgn

 <p>THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION.</p> 	<p>STATE OF HAWAII DEPARTMENT OF TRANSPORTATION HIGHWAYS DIVISION</p> <p>SIGNING AND PAVEMENT MARKINGS</p> <p>NOTES & LEGEND</p> <p>INTERSTATE ROUTE H-1 ZIPPER LANE EXTENSION RADFORD DRIVE OVERPASS TO KEEHI INTERCHANGE FEDERAL AID PROJECT NO. NH-HI-1(246)</p> <p>Scale: None Date: Mar. 2, 2004</p>
	SHEET No. P1 OF 19 SHEETS