

| FED. ROAD DIST. NO. | STATE | PROJ. NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|---------------------|-------|-----------|-------------|-----------|--------------|
| HAWAII | HAW. | 56A-01-97 | 1998 | 3 | 8 |


GENERAL NOTES

- The scope of work for this project includes but is not limited to removal of existing pavement markings and traffic signs, installation of new pavement markings and traffic signs, placing base courses, paving asphalt concrete pavement, grading, demolition and removal of drainage structure, installation of drain inlet and drain pipes, and dressing of shoulders.
- The Contractor is reminded of the requirements of Subsection 108.01 - Subletting of Contract, which requires him to perform work amounting to not less than 50 percent of the total contract cost less deductible items. Non-compliance with this Subsection may be grounds for rejection of bid.
- The Contractor's attention is directed to the following Sections of the Special Provisions: Subsection 107.13 - Public Convenience and Safety, Subsection 107.21 - Contractor's Responsibility for Utility Property and Services, Section 645 - Traffic Control.
- At the end of each day's work, the Contractor shall remove all equipment and other obstructions to permit free and safe passage of public traffic.
- The existence and location of underground utilities, manholes, monuments and structures as shown on the plans are from the latest available data but the accuracy is not guaranteed. The encountering of other obstacles during the course of the work is possible. The Contractor shall be held liable for any damages incurred to the existing facilities and/or improvements as a result of his operations.
- The Contractor shall notify the State in writing, two (2) weeks prior to starting paving operations.
- Smooth riding connections shall be constructed at all limits of new A.C. pavement including the beginning and end of project, connecting approaches, side streets and driveways as shown on the plans and/or as directed by the Engineer.
- Dressing of shoulder, shall consist of clearing, grubbing, grading, reshaping, and compacting the unpaved shoulders with suitable excavated material as shown on the plans and/or as directed by the Engineer. This work shall be considered incidental to the various contract items.
- Earth swale shall be graded to drain. This work shall be considered incidental to the various contract items.
- Contractor shall provide for access to and from all existing side streets and/or driveways at all times.
- All saw cutting work shall be considered incidental to A.C Pavement, Mix No. IV.

LEGEND

| | | | |
|--|------------------------------|--|------------------------------------|
| | Reconstruction Areas | | Existing Sewer Line |
| | Cold Planing Areas | | Existing Sewer Manhole |
| | Resurfacing Limits | | Existing Sewer Cleanout |
| | Existing Joint Pole | | Existing Mailbox |
| | Existing Power Pole | | Existing Sidewalk |
| | Existing Guy Pole | | Existing Highway Lighting Standard |
| | Existing Telephone Pole | | Existing Traffic Sign |
| | Existing TV Cable Pullbox | | Existing Flashing Light Signal |
| | Existing Water Meter | | Existing Guard Rail |
| | Existing Water Valve Box | | Existing Chain Link Fence |
| | Existing Fire Hydrant | | Existing Edge Shoulder |
| | Existing Water Line | | New Edge Shoulder |
| | Existing Grated Drain Inlet | | Existing Edge Pavement |
| | Existing Catch Basin | | New Edge Pavement |
| | Existing Storm Drain Manhole | | Existing Highway Right of Way |
| | Existing Drain Line | | Existing Contour |
| | Existing Headwall | | |
| | Existing Swale | | |

| | |
|-------------------|------|
| SURVEY PLOTTED BY | DATE |
| DRAWN BY | DATE |
| DESIGNED BY | DATE |
| CHECKED BY | DATE |
| ORIGINAL PLAN | |
| NOTE BOOK | |
| No. | |

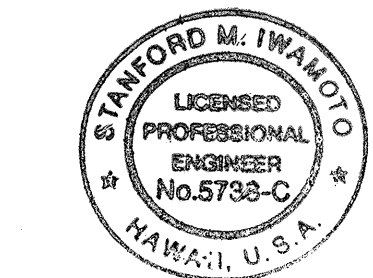

THIS WORK WAS PREPARED BY ME
OR UNDER MY SUPERVISION

Signature

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

GENERAL NOTES AND LEGEND

KUHIO HIGHWAY,
LEFT TURN STORAGE LANE TO
HAUAALA ROAD AND KAWAIHAU ROAD
Proj. No. 56A-01-97

Scale: None

Date: May, 1998

SHEET No. / OF / SHEETS