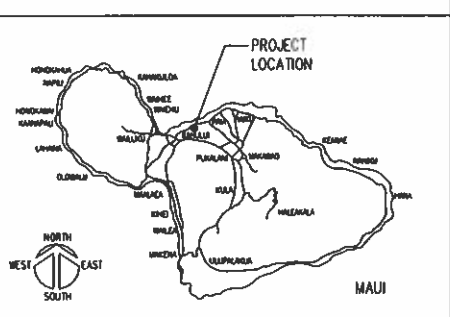
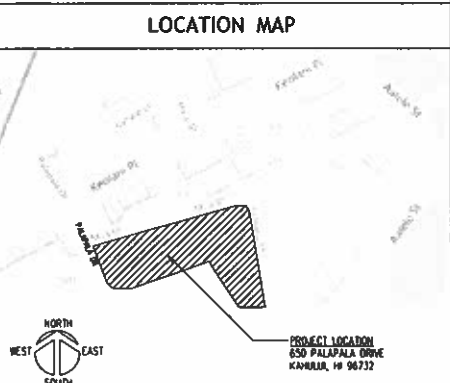


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	HWY-M-03-22M	2022	1	15

DISTRICT OF KAHULUI
ISLAND OF MAUI

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	HWY-M-03-22M	2022	1	15

VICINITY MAP	DRAWING INDEX	GENERAL NOTES
	<p>SHT NO. SHEET DESCRIPTION</p> <p>T-1 TITLE SHEET</p> <p>ARCHITECTURAL</p> <p>A-1 ABBREVIATIONS, DRAWING SYMBOLS & PLAN SYMBOLS</p> <p>A-2 PARTIAL SITE PLAN</p> <p>A-3 FLOOR PLANS</p> <p>A-4 ROOF PLANS</p> <p>A-5 REFLECTED CEILING PLANS</p> <p>A-6 ELEVATIONS</p> <p>A-7 WALL SECTION & MISCELLANEOUS DETAILS</p> <p>STRUCTURAL</p> <p>S-1 GENERAL STRUCTURAL NOTES</p> <p>S-2 PARTIAL EXISTING FOUNDATION REPAIR PLAN</p> <p>S-3 PARTIAL EXISTING CEILING FRAMING REPAIR PLAN</p> <p>S-4 PARTIAL EXISTING ROOF FRAMING REPAIR PLAN</p> <p>S-5 SECTION & DETAILS</p> <p>S-6 DETAILS</p> <p>S-7 SECTIONS & DETAILS</p>	<p>1. ALL WORK SHOWN IS NEW UNLESS OTHERWISE NOTED.</p> <p>2. COMPLY WITH ALL APPLICABLE COUNTY OF MAUI, STATE, AND FEDERAL LAWS, BUILDING CODES, ORDINANCES, AND AMENDMENTS IN THE CONSTRUCTION OF THIS PROJECT.</p> <p>3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONFORMANCE WITH THE APPLICABLE PROVISIONS OF CHAPTER 54, WATER QUALITY STANDARDS, AND CHAPTER 55, WATER POLLUTION CONTROL, OF TITLE 11, HAWAII ADMINISTRATIVE RULES OF THE STATE DEPARTMENT OF HEALTH.</p> <p>4. WORKMANSHIP SHALL CONFORM TO THE STATE BUILDING CODE. HOWEVER, WHERE REFERENCE IS MADE TO PERFORMANCE CONFORMING WITH OTHER STANDARDS, THE MORE STRINGENT SHALL APPLY.</p> <p>5. VERIFY AND CHECK ALL DIMENSIONS AND DETAILS SHOWN ON THE DRAWINGS PRIOR TO THE START OF CONSTRUCTION. CONTRACTOR SHALL BE AWARE OF ALL EXISTING CONDITIONS INVOLVED IN THE WORK. NOTIFY THE ARCHITECT IMMEDIATELY, IN WRITING, OF ANY DISCREPANCIES OR DISCREPANCIES BETWEEN THE DRAWINGS AND CONDITIONS IN THE FIELD, INCLUDING, BUT NOT LIMITED TO, DIMENSIONS, ELEVATIONS, ETC.</p> <p>6. CAUTION SHALL BE EXERCISED SO THAT NO EXISTING AREAS TO REMAIN ARE DAMAGED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY/ALL CORRECTIVE WORK REQUIRED TO RESTORE DAMAGE TO THE SITE, EXISTING STRUCTURE, AND/OR EXISTING SURFACES. DAMAGED SURFACES SHALL BE CORRECTED TO MATCH EXISTING ADJACENT SURFACES & PAID FOR BY THE CONTRACTOR.</p> <p>7. THE CONTRACTOR SHALL RESTORE TO THE ORIGINAL OR BETTER CONDITION ALL IMPROVEMENTS AND VEGETATION DAMAGED AS A RESULT OF THE CONSTRUCTION INCLUDING PAVEMENTS, CURBMENTS, CURBS, SIGNS, LANDSCAPING, STRUCTURES, UTILITY, WALLS, FENCES, ETC. UNLESS PROVIDED FOR SPECIFICALLY IN THE PROPOSAL, DEMOLITION AND RESTORATION OF EXISTING ITEMS SHALL BE INCIDENTAL.</p> <p>8. ALL EXISTING UTILITIES, WHETHER OR NOT SHOWN ON THE PLANS, SHALL BE PROTECTED AT ALL TIMES BY THE CONTRACTOR DURING CONSTRUCTION AND ANY DAMAGE TO THE EXISTING UTILITIES SHALL BE REPAIRED AND PAID FOR BY THE CONTRACTOR.</p> <p>9. THE CONTRACTOR SHALL NOTIFY ALL AGENCIES TO VERIFY THE ACTUAL LOCATION OF ALL UTILITIES IN THE PROJECT AREA PRIOR TO EXCAVATION. THE CONTRACTOR SHALL COORDINATE THE WORK WITH THE UTILITY AGENCIES.</p> <p>10. ALL REQUIRED UTILITY ADJUSTMENTS SUCH AS MANHOLE AND/OR VALVE BOX FRAMES AND COVERS SHALL BE DONE BY THE CONTRACTOR AND SHALL BE CONSIDERED INCIDENTAL TO THE WORK.</p> <p>11. THE CONTRACTOR SHALL NOTIFY THE ONE CALL CENTER AT (808) 423-7287 AT LEAST 5 WORKING DAYS PRIOR TO THE START OF EXCAVATION OR TRENCHING.</p> <p>12. EXCEPT WHERE OTHERWISE DIRECTED BY OWNER, ALL DISPLACED MATERIALS HAVING SALVAGE VALUE SHALL BE CAREFULLY AND HEAVILY STACKED OR STORED ON THE PREMISES WHERE DIRECTED BY OWNER AND SHALL REMAIN THE PROPERTY OF THE OWNER. ALL DISMANTLED AND DEMOLISHED MATERIALS HAVING NO SALVAGE VALUE AS DETERMINED BY THE OWNER, SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE COMPLETELY REMOVED AND HAULED AWAY FROM THE PREMISES.</p> <p>13. THE FACILITY SHALL REMAIN OPEN DURING THE CONSTRUCTION PERIOD. THE CONTRACTOR SHALL PROVIDE, INSTALL, AND MAINTAIN ALL NECESSARY TEMPORARY CONSTRUCTION ZONE WARNING SIGNS, LIGHTS, FLARES, BARRICADES, BARRIERS, CONES, AND OTHER PROTECTIVE FACILITIES FOR THE PROTECTION OF LIFE AND SAFETY. CONTRACTOR SHALL TAKE NECESSARY PRECAUTIONS FOR THE PROTECTION, CONFORMANCE, AND SAFETY OF THE PUBLIC THROUGHOUT THE CONSTRUCTION PERIOD.</p> <p>14. CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE JOB SITE IN A NEAT AND SAFE CONDITION. ALL WORK SHALL BE PERFORMED WITHIN LIMITS OF WORK AREAS COORDINATED WITH THE OWNER. DELIVERY OF MATERIALS AND EQUIPMENT SHALL BE COORDINATED TO MINIMIZE DISRUPTION OF FACILITY OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR CONTROL OF NOISE, DUSTS AND DUST TO PREVENT DISRUPTION OF FACILITY OPERATIONS. CONTRACTOR SHALL PROVIDE AND MAINTAIN SUITABLE BARRIERS AS REQUIRED TO PREVENT PUBLIC ENTRY, AND TO PROTECT THE WORK AND ADJACENT BUILDINGS, AREAS, AND PROPERTIES FROM CONSTRUCTION ACTIVITIES. BARRIERS SHALL BE REMOVED WHEN NO LONGER REQUIRED.</p> <p>15. THE CONTRACTOR AGREES TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR THE JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY, AND THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORK HOURS.</p> <p>16. THE JOB SITE MUST BE LEFT IN A SAFE, SECURE CONDITION AT THE END OF EACH CONSTRUCTION WORK DAY, CLEAN UP AND REMOVE FROM THE JOB SITE ALL MATERIALS AND MAINTAIN THE PREMISES IN A CLEAN, ORDERLY CONDITION AT ALL TIMES.</p> <p>17. UPON COMPLETION OF CONSTRUCTION, THE ENTIRE JOB SITE SHALL BE CLEANED OF ALL RUBBERSTAMP AND DEBRIS.</p> <p>18. AREAS FOR CONTRACT ZONE LIMITS, MATERIALS STORAGE, SCHEDULING OF WORK, TRASH DISPOSAL, WORKER'S PARKING, ETC., SHALL BE COORDINATED WITH THE OWNER.</p> <p>19. WHERE PEDESTRIAN WALKWAYS EXIST, THEY SHALL BE MAINTAINED IN PASSABLE CONDITION OR OTHER FACILITIES FOR PEDESTRIANS SHALL BE PROVIDED. TEMPORARY PASSAGEWAYS SHALL BE ACCESSIBLE PER 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN CHAPTER 2, SECTION 201.3 AND 206.1.</p> <p>20. THE CONTRACTOR SHALL MAKE ARRANGEMENTS FOR TEMPORARY UTILITIES SUCH AS ELECTRICITY, WATER, ETC. REQUIRED FOR CONSTRUCTION OPERATIONS AND ALL SUCH COSTS SHALL BE BORNE BY THE CONTRACTOR.</p> <p>21. ALL WORK SHOWN SHALL CONFORM WITH THE 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN.</p>
<p>LOCATION MAP</p> 		<p>DEPARTMENT OF TRANSPORTATION STATE OF HAWAII</p> <p>APPROVED: _____</p> <p>HIGHWAYS ADMINISTRATOR DATE</p> <p>SHEET NO. T-1 OF 15 SHEETS</p>