




FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	NH-0900(080)	2013	28	47




DETECTABLE WARNING AT CURB RAMP




TRANSITION RAMP WITH DETECTABLE WARNING

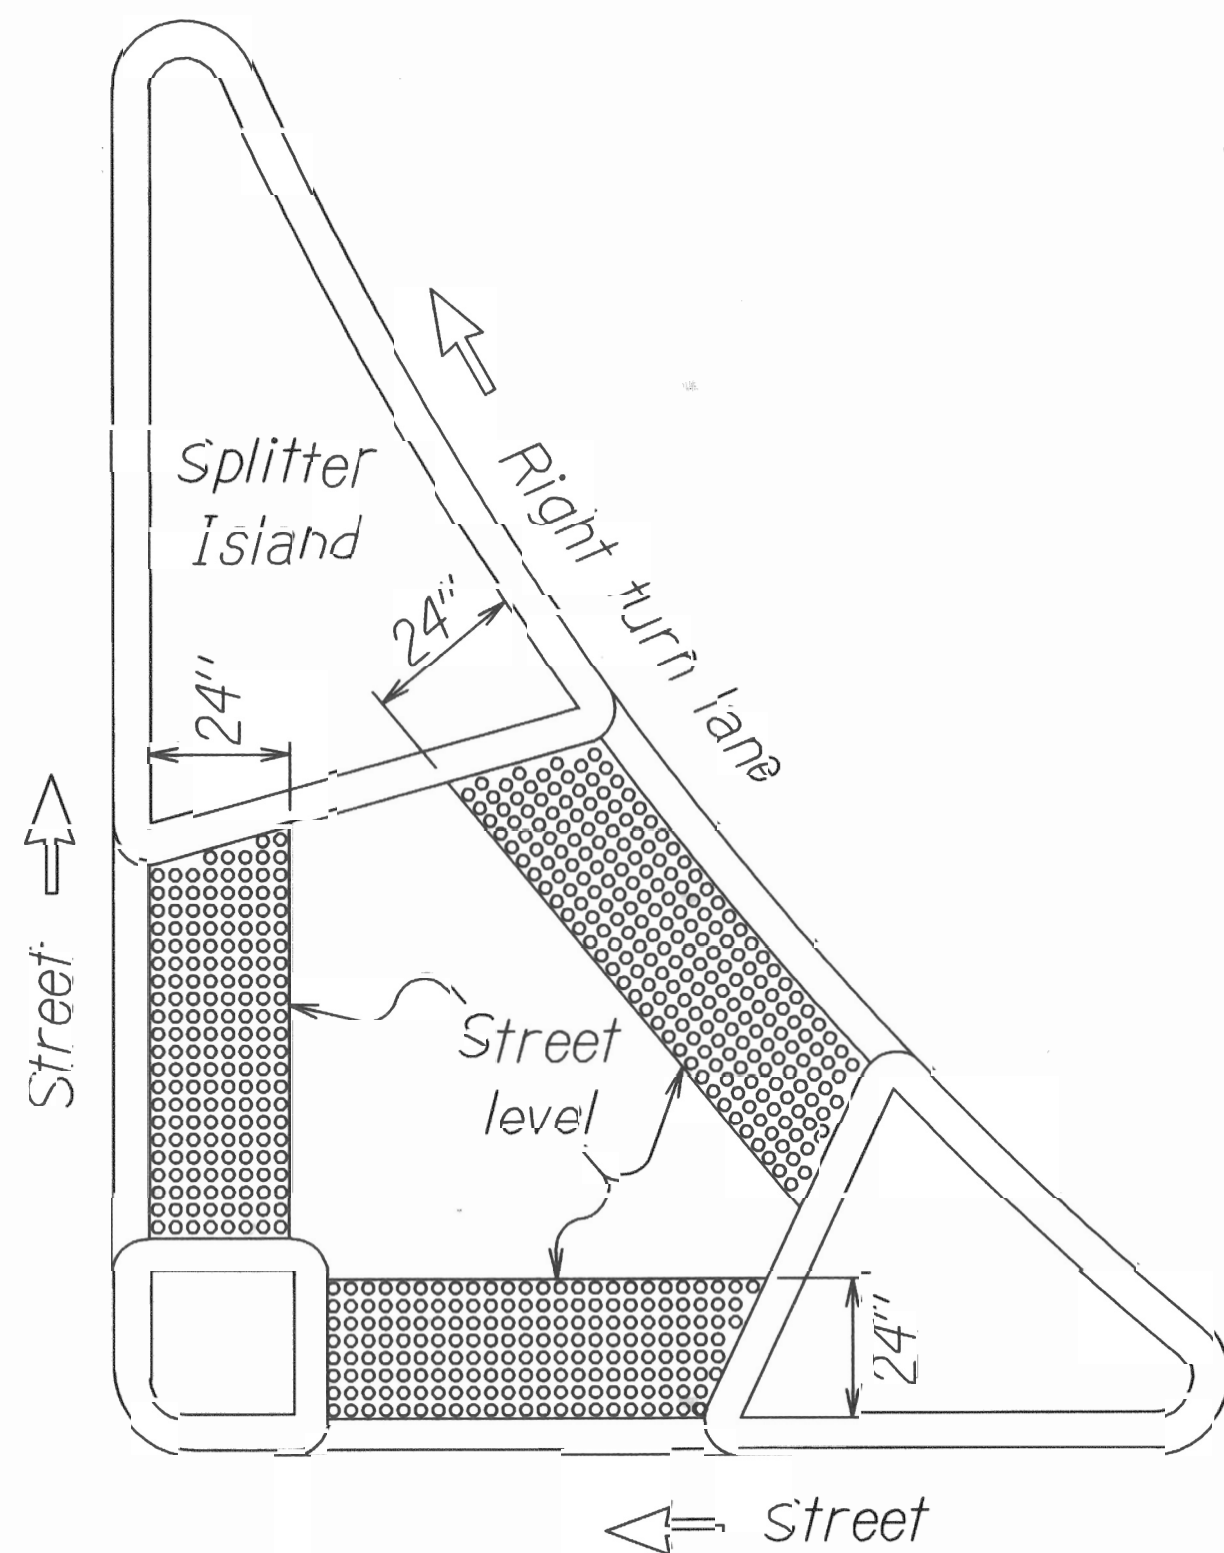

REFUGE ISLAND WITH DETECTABLE WARNING



SHARED CURB RAMP WITH DETECTABLE WARNING

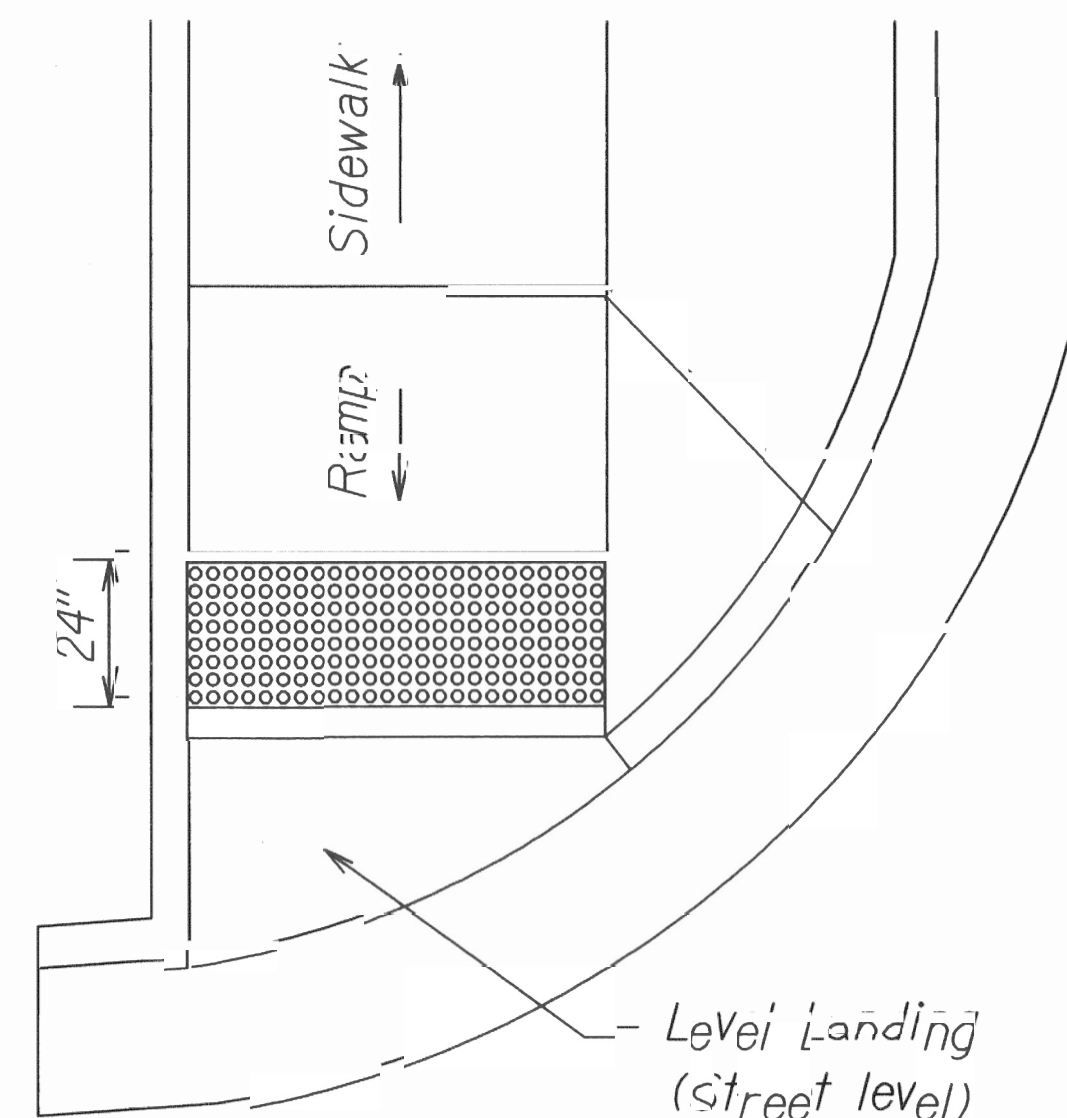


END OF SIDEWALK CURB RAMP WITH DETECTABLE WARNING

TYPICAL INSTALLATION OF DETECTABLE WARNINGS


Not to Scale

NOTES:

1. Detectable warnings shall be 24 inches in the direction of travel and extend the full width of the curb ramp or flush surface (does not include flares).
2. Truncated domes shall have a diameter of 0.9 to 1.4 inch at the bottom, a diameter of 50%-65% of the base diameter at the top, a height of 0.2 inch and a center-to-center spacing of 1.6 to 2.4 inches measured along one side of a square arrangement.
3. Domes shall be aligned on a square grid in the predominant direction of travel to permit wheels to roll between the domes.
4. There shall be a minimum of 70 percent contrast in light reflectance between the detectable warning and an adjoining surface, or the detectable warning shall be "safety yellow".
5. The material used to provide visual contrast shall be an integral part of the detectable warning surface.
6. The detectable warning shall be located so that the edge nearest the curb line or other potential hazard is 6 to 8 inches from the curb line.



ENLARGEMENT



DOMES SECTION

DETECTABLE WARNING DETAIL

Not to Scale

STATE OF HAWAII  
DEPARTMENT OF TRANSPORTATION  
HIGHWAYS DIVISION

**DETECTABLE WARNING DETAILS**

KUIHELANI HIGHWAY & HONOAPIILANI HIGHWAY  
PAVEMENT PREVENTIVE MAINTENANCE  
Puunene Avenue to Honoapiilani Highway  
and Kuihelani Highway to Kapoli Street  
Federal-Aid Project No. NH-0900(080)

Scale: as noted Date: May, 2012

SHEET No. 1 OF 1 SHEETS

I:\1\usr2\traffic\std\curbramp\detect-r12-06-06.dgn

TE-XX sht. 9 of 9

ORIGINAL PLAN	DATE
NOTED BY	DATE
DESIGNED BY	DATE
CHECKED BY	DATE
IN CHARGE	DATE