


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	360A-01-97	1998	5	9

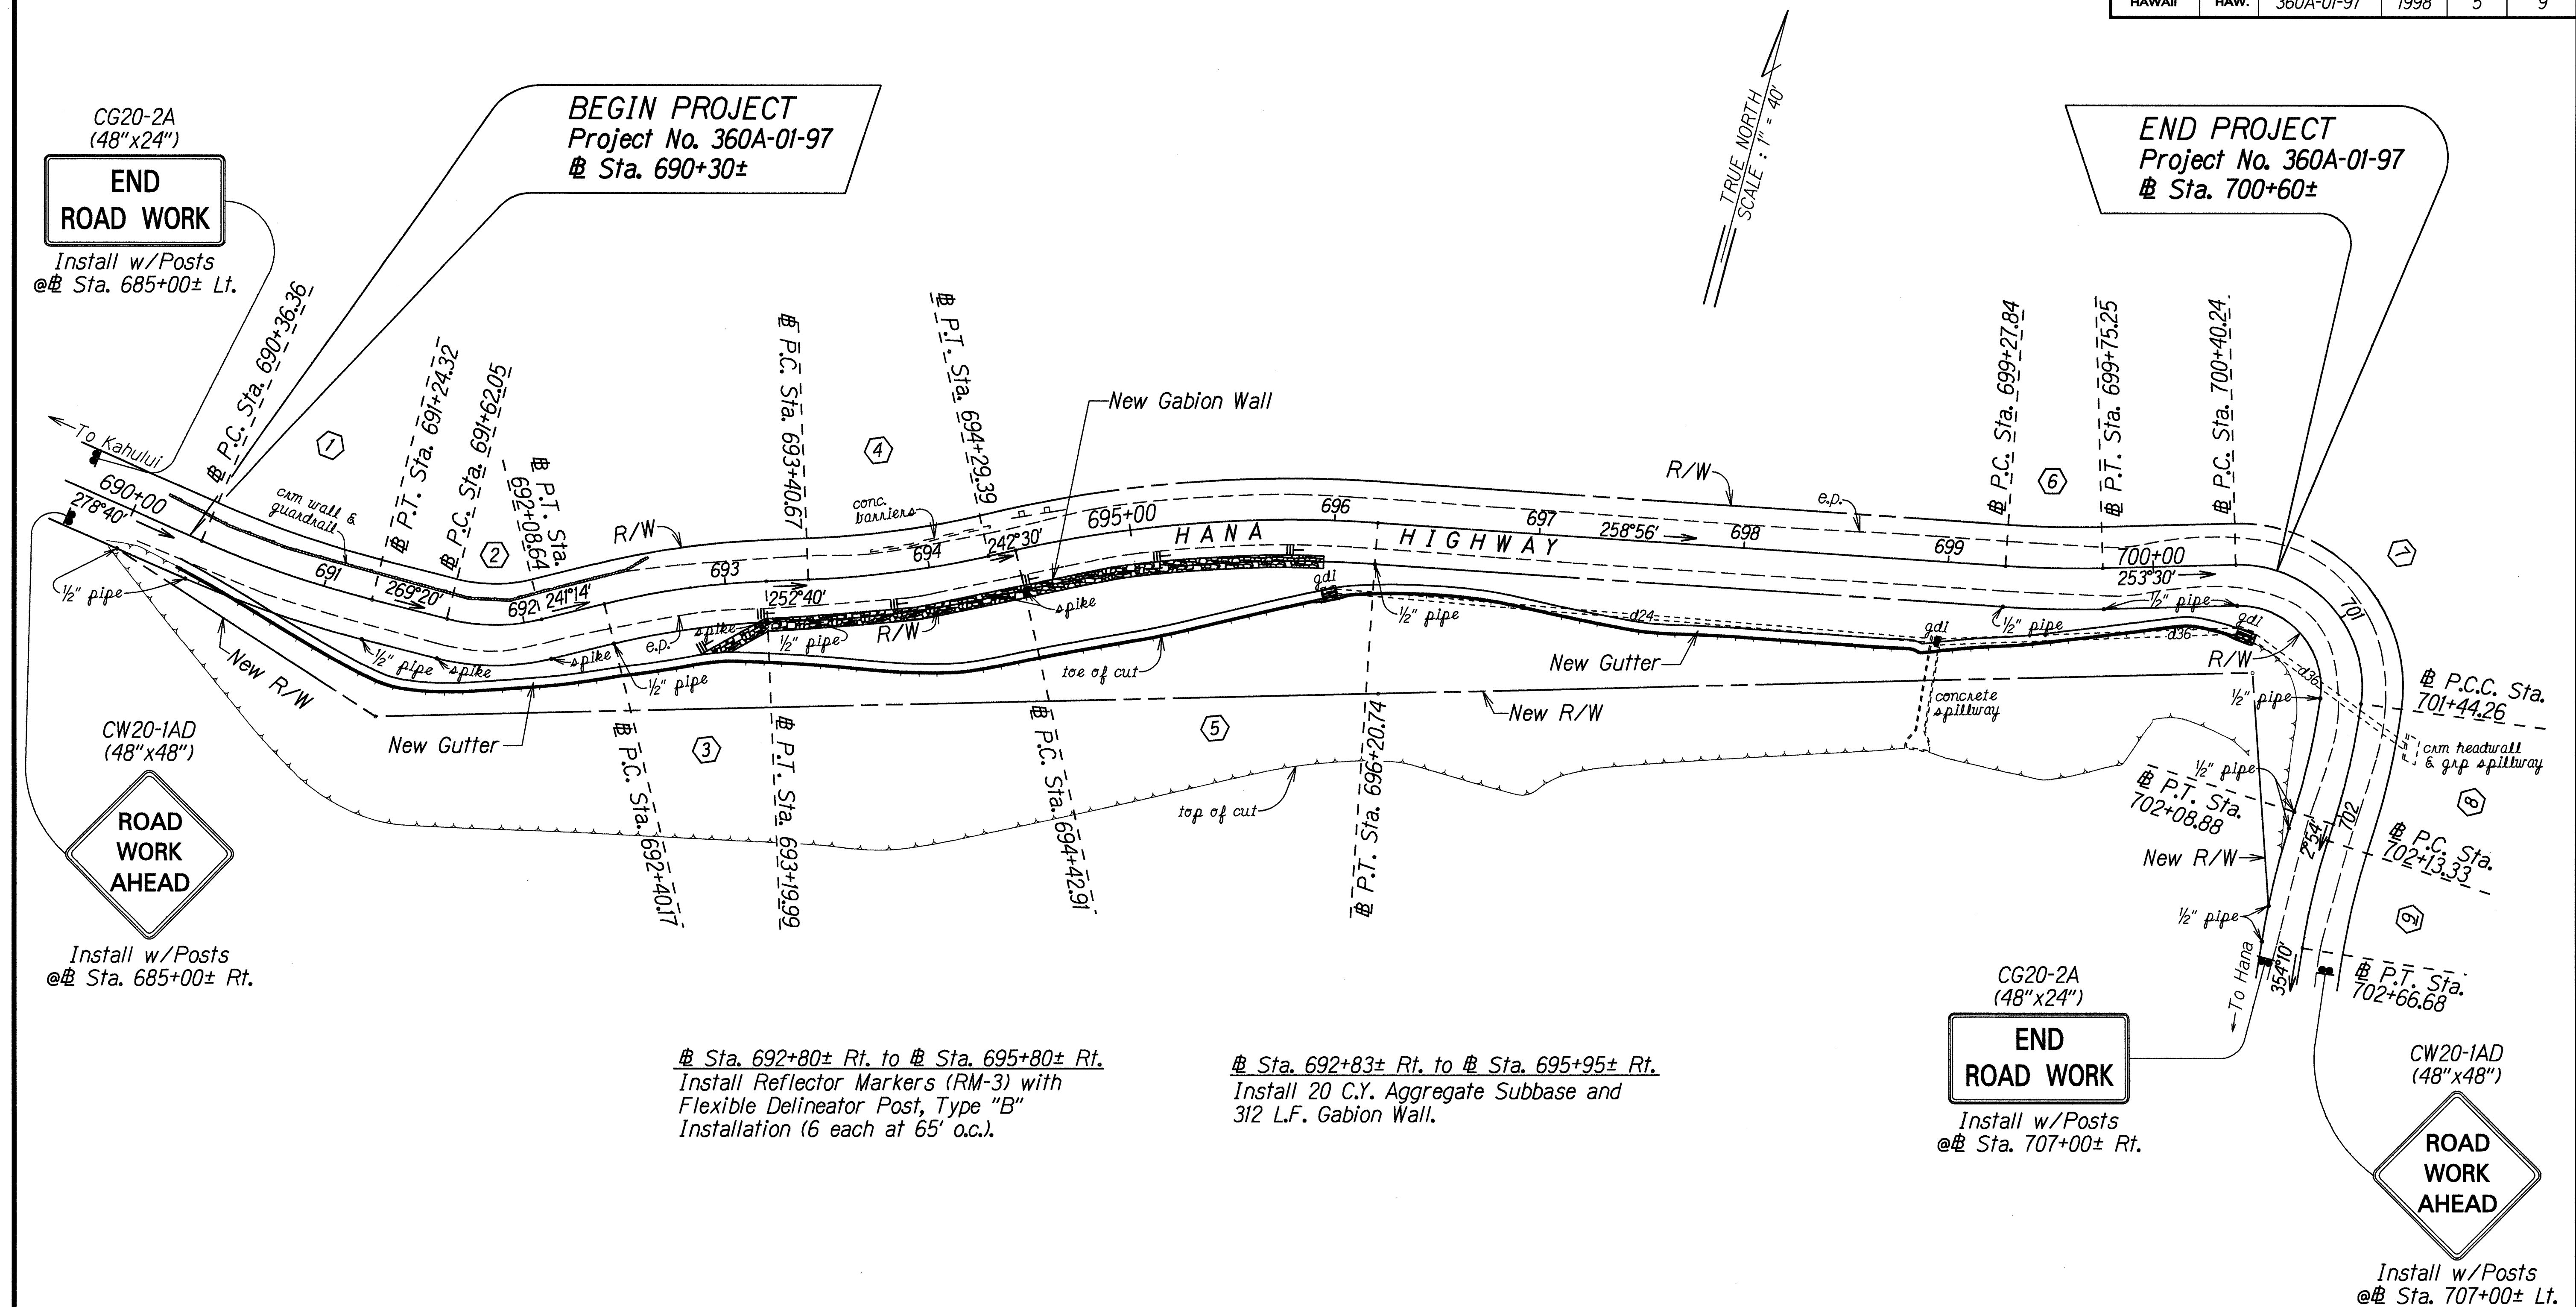

Sta. 692+80± Rt. to Sta. 695+80± Rt.
Install Reflector Markers (RM-3) with
Flexible Delineator Post, Type "B"
Installation (6 each at 65' o.c.).

Sta. 692+83± Rt. to Sta. 695+95± Rt.
Install 20 C.Y. Aggregate Subbase and
312 L.F. Gabion Wall.

CG20-2A
(48"x24")
END ROAD WORK
Install w/Posts
@ Sta. 707+00± Rt.

CW20-1AD
(48"x48")
ROAD WORK AHEAD
Install w/Posts
@ Sta. 707+00± Lt.

CURVE DATA									
	①	②	③	④	⑤	⑥	⑦	⑧	⑨
Δ	9°20'	28°06'	11°26'	10°10'	16°26'	5°26'	99°20'	10°04'	8°44'
Δ/2	4°40'	14°03'	5°43'	5°05'	8°13'	2°43'	49°40'	5°02'	4°22'
R	540.00'	95.00'	400.00'	500.00'	620.00'	500.00'	60.00'	345.00'	350.00'
T	44.08'	23.77'	40.04'	44.48'	89.53'	23.73'	70.67'	30.39'	26.73'
C	87.87'	46.13'	79.69'	88.60'	177.22'	47.40'	91.48'	60.54'	53.30'
Lc	87.96'	46.59'	79.82'	88.72'	177.83'	47.41'	104.02'	60.62'	53.35'

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN

HANA HIGHWAY
Improvements in the Vicinity of
Keanae (M.P. 16.13)
Project No. 360A-01-97

Scale: 1" = 40' Date: March 1998

SHEET No. 1 OF 1 SHEETS