

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ADDENDUM NO. 1

FOR

HANA HIGHWAY IMPROVEMENTS

HUELO TO HANA
M.P. 4.20 TO M.P. 23.70

PROJECT NO. 360AB-02-00

DISTRICTS OF MAKAWAO AND HANA
ISLAND OF MAUI


FY 2004

Amend the Bid Documents as follows:

A. SPECIAL PROVISIONS


1. Replace page 401-21a dated 7/14/03 with the attached page 401-21a dated 10/29/03.

Please acknowledge receipt of the Addendum No. 1 by recording the date of its receipt in the space provided on page P-4 of the Proposal.

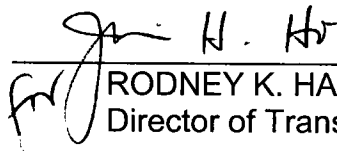

RODNEY K. HARAGA
Director of Transportation

TABLE IV – SLIDING SCALE PAY FACTOR	
Percent Compaction	Percent Payment
>98	Removal
98	95
92 – 97	100
90 – 91	80
<90	Removal

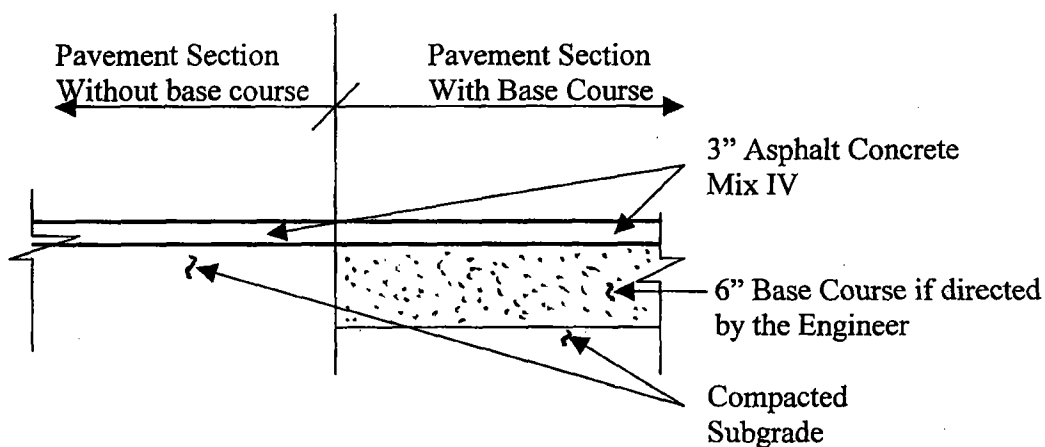

PAVEMENT SECTION FOR ASPHALT CONCRETE FOR PULL-OUT AREAS, MIX NO. IV
NOT TO SCALE

- NOTES:
1. The above pavement section applies to paving roadway shoulder pullout areas at Mile Post Nos. 4.32, 5.08, 5.10, 6.10, 6.20, 6.60, and 7.00.
 2. Paving limits at each of the above Mile Post locations will be determined by the Engineer. Pavement areas will vary from 200 to 400 square feet per location.
 3. If 90% minimum compaction of the AC Pavement cannot be achieved on compacted subgrade areas, the Contractor shall notify the Engineer and inform him of the steps taken to achieve compaction. The Engineer may accept the AC Pavement in-place and pay for accepted work at 100% of the contract unit price.

END OF SECTION