


1. COMPLETE ISOLATED SPALL REPAIRS WHERE INDICATED ON ENLARGED PLANS. PER SHEET S-200
2. VERIFY REMAINING ROADWAY PAVEMENT CONCRETE IS SOUND. ANY LOOSE OR DELAMINATED SPALLS FOUND DURING CONSTRUCTION SHALL BE REPORTED TO DOTA AND REPAIRED FOLLOWING PROJECT SPALL REPAIR DETAILS UPON APPROVAL.
3. COMPLETE EXPANSION JOINT REPAIRS PER DEMOLITION DETAIL 1/S-502 AND REPAIR DETAIL 4/S-301.
4. GRAVITY FEED EPOXY RESIN IN CRACKS ALONG ROADWAY FOLLOW DETAIL 1/S-202. THERE IS AN ESTIMATED QUANTITY OF 4" OF EXISTING CRACKS FOR EVERY SQUARE FOOTAGE OF ROADWAY.
5. INSTALL EPOXY OVERLAY WITH EMBEDDED AGGREGATE ALONG FULL SURFACE OF ROADWAY

VERIFY SPALL AND DELAMINATION DIMENSIONS IN FIELD BY CHAIN
DRAGGING OR HAMMER SOUNDING. REPORT ANY DISCREPANCIES
TO DOT-A. FOR SPALL REPAIR DETAIL SEE SHEET S-200 TO S-201


EWA 3RD FLOOR ROADWAY SPALL QUANTITY					
SPALL NO.	TYPE	SIZE	QTY (SF)	LOCATION	REPAIR DETAIL
E3-WD-D739	DELAMINATION	4'-6" X 4'-6"	21	S-E-301	1/S-200
E3-WD-D524	DELAMINATION	4'-0" X 1'-6"	6	S-E-302	1/S-200
E3-WD-D507	DELAMINATION	2'-0" X 1'-0"	2	S-E-303	1/S-200
E3-WD-D260	DELAMINATION	24'-0" X 1'-0"	24	S-E-306	1/S-200
E3-WD-D250	DELAMINATION	23'-0" X 0'-6"	11.5	S-E-307	1/S-200
E3-WD-D257	DELAMINATION	23'-0" X 0'-6"	11.5	S-E-307	1/S-200
E3-WD-S239	SPALL	23'-0" X 0'-6"	11.5	S-E-308	1/S-200
E3-WD-D243	DELAMINATION	3'-0" X 2'-0"	6	S-E-308	1/S-200
E3-WD-S191	SPALL	6'-0" X 1'-0"	6	S-E-310	1/S-200
E3-WD-D196	DELAMINATION	23'-0" X 0'-6"	11.5	S-E-310	1/S-200
E3-WD-D197	DELAMINATION	17'-0" X 1'-0"	17	S-E-310	1/S-200
E3-WD-S176	SPALL	23'-0" X 1'-0"	23	S-E-311	1/S-200
E3-WD-D187	DELAMINATION	2'-6" X 2'-6"	6.25	S-E-311	1/S-200
E3-WD-D188	DELAMINATION	1'-0" X 1'-0"	1	S-E-311	1/S-200
E3-WD-S158	SPALL	1'-0" X 1'-0"	1	S-E-312	1/S-200
E3-WD-D175	DELAMINATION	23'-0" X 1'-0"	23	S-E-312	1/S-200
E3-WD-D069	DELAMINATION	1'-0" X 1'-0"	1	S-E-313	1/S-200
E3-WD-D070	DELAMINATION	17'-0" X 11'-0"	187	S-E-313	1/S-200
E3-WD-D071	DELAMINATION	11'-0" X 1'-0"	11	S-E-313	1/S-200
E3-WD-D004	DELAMINATION	1'-0" X 1'-0"	1	S-E-314	1/S-200
E3-WD-S016	DELAMINATION	2800'-0" X 0'-6"	1400	S-E-314	1/S-200
E3-WD-D034	DELAMINATION	11'-0" X 1'-0"	11	S-E-314	1/S-200
TOTAL			1793.25		

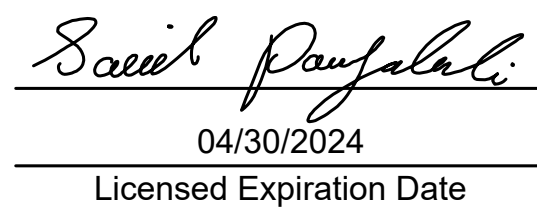

This work was prepared by me or under my supervision

DSGN.	DRWN.	CHKD.	APPD.
MG	MG	SP	

EWA WING

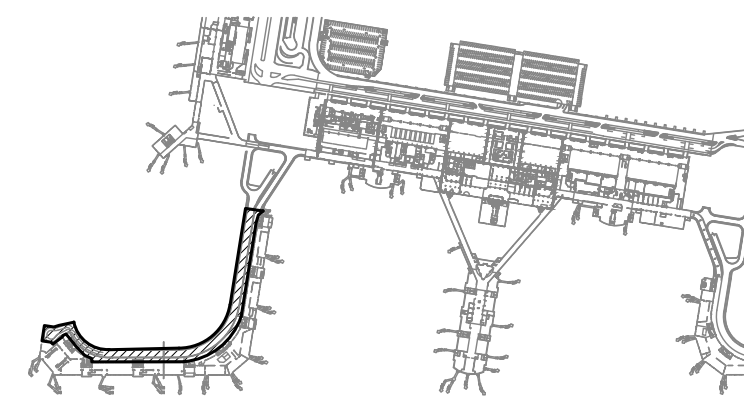

NO.	DATE	REVISIONS

SEPTEMBER, 2022
DATE

EWA AND DH CONCOURSE ROADWAY IMPROVEMENTS PHASE 1

AT
DANIEL K. INOUE INTERNATIONAL AIRPORT
HONOLULU, OAHU, HAWAII

AO1043-32

EWA WING - THIRD FLOOR PLAN

DATE :	DWG. NO. S-E-300
SEPTEMBER, 2022	
SHEET :	
76 OF 247 SHEETS	