


WALL ON SOUTH CORNER AT
LAIMI ROAD
Scale: 1" = 20'-0"

GENERAL NOTES FOR CRM WALL

1. All dimensions and elevations shall be confirmed in the field.
2. Footing excavation shall be continued to elevation necessary to obtain suitable foundation.
3. CRM shall be made with approved stones laid in full mortar beds not closer than $\frac{3}{4}$ " to the exposed face of work and with a minimum of visible pointing.

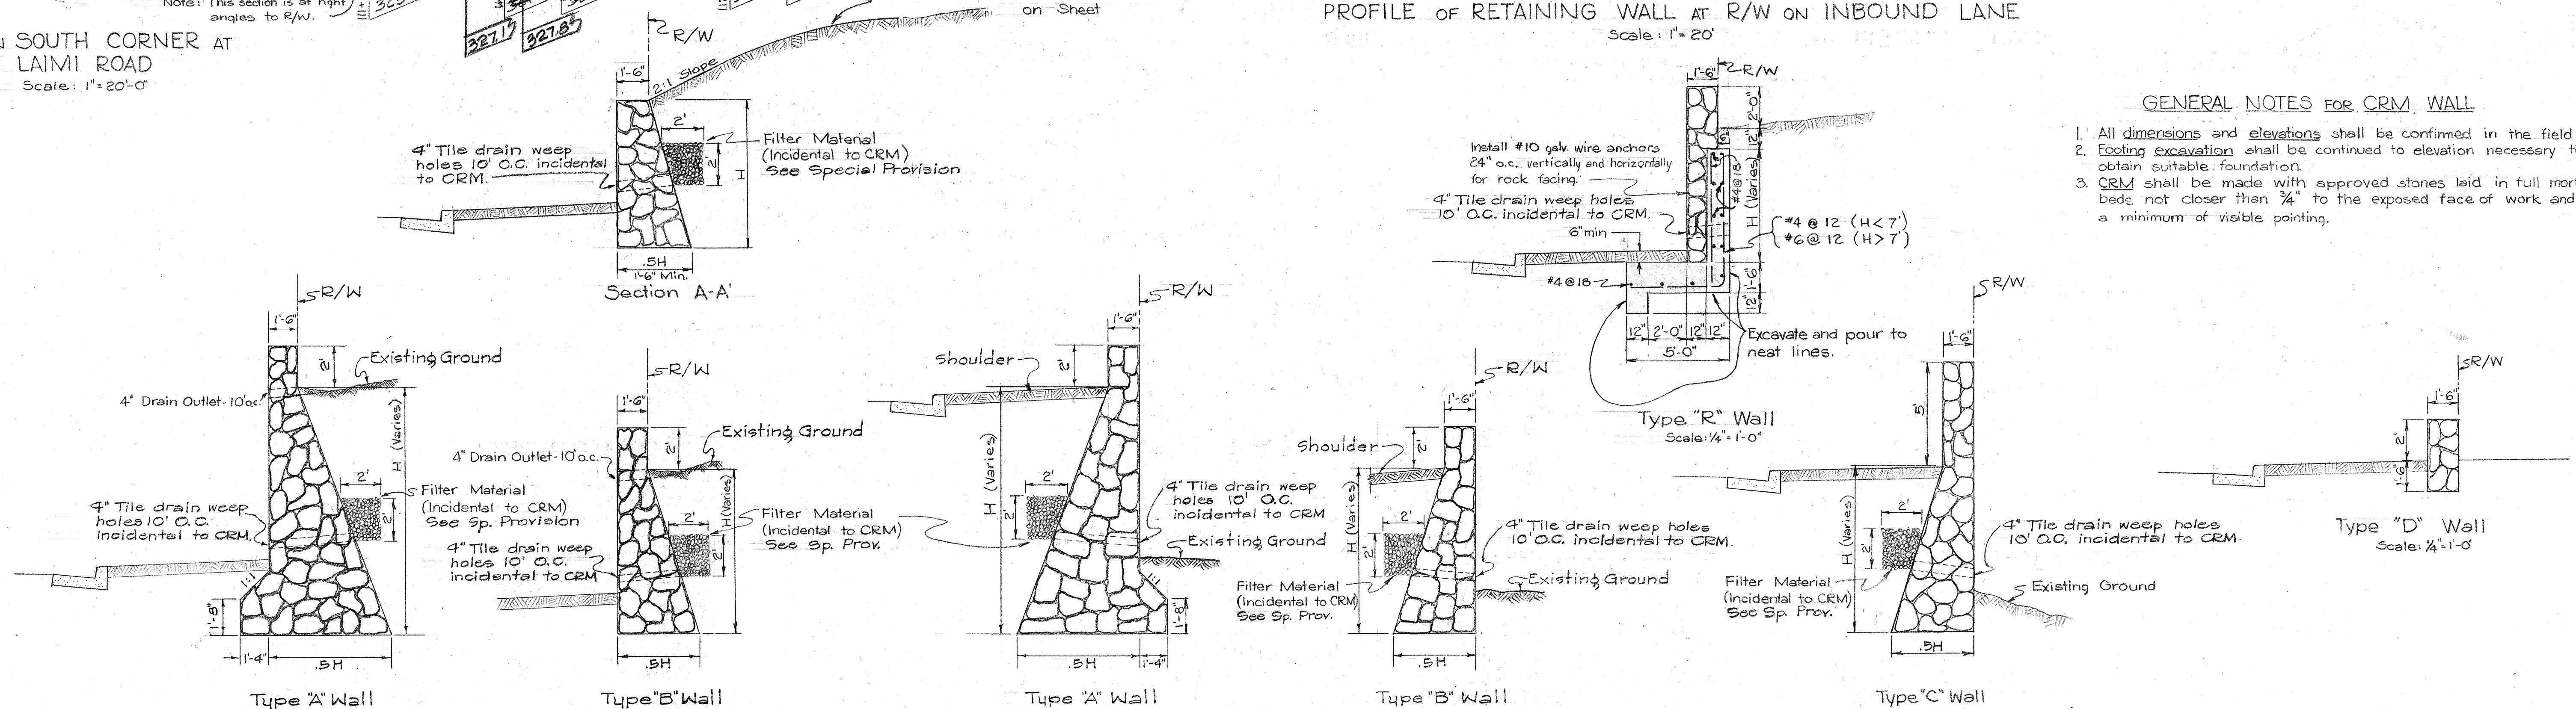

TYPICAL SECTION OF RETAINING WALL IN CUT
Scale: $\frac{1}{4}" = 1'-0"$

TYPICAL SECTION OF RETAINING WALL IN FILL
Scale: $\frac{1}{4}" = 1' - 0"$

	ESTIMATED QUANTITIES				
	Struc. Exc.	Class A-I Cont.	Reinf. Steel	CRM	
Outbound	768 cu. yd.	276 cu. yd.	248 lb.	717 cu. yd.	
Inbound	608 cu. yd.	352 cu. yd.	1560 lb.	826.56 cu. yd.	
Total	1376 cu. yd.	628 cu. yd.	2408 lb.	1543.56 cu. yd.	

TERRITORIAL HIGHWAY DEPARTMENT
TERRITORY OF HAWAII

RETAINING WALLS
PROJ. NO. US 0610(2)

Scale: As Noted Jan. 1956

SHEET No. | OF | SHEETS