




| FED. ROAD DIST. NO. | STATE | PROJ. NO. | FISCAL YEAR | SHEET NO. | TOTAL SHEETS |
|---------------------|-------|-----------|-------------|-----------|--------------|
| HAWAII              | HAW.  | 64A-01-92 | 1993        | 6         | 6            |

TRUE NORTH  
SCALE: 1" = 20'

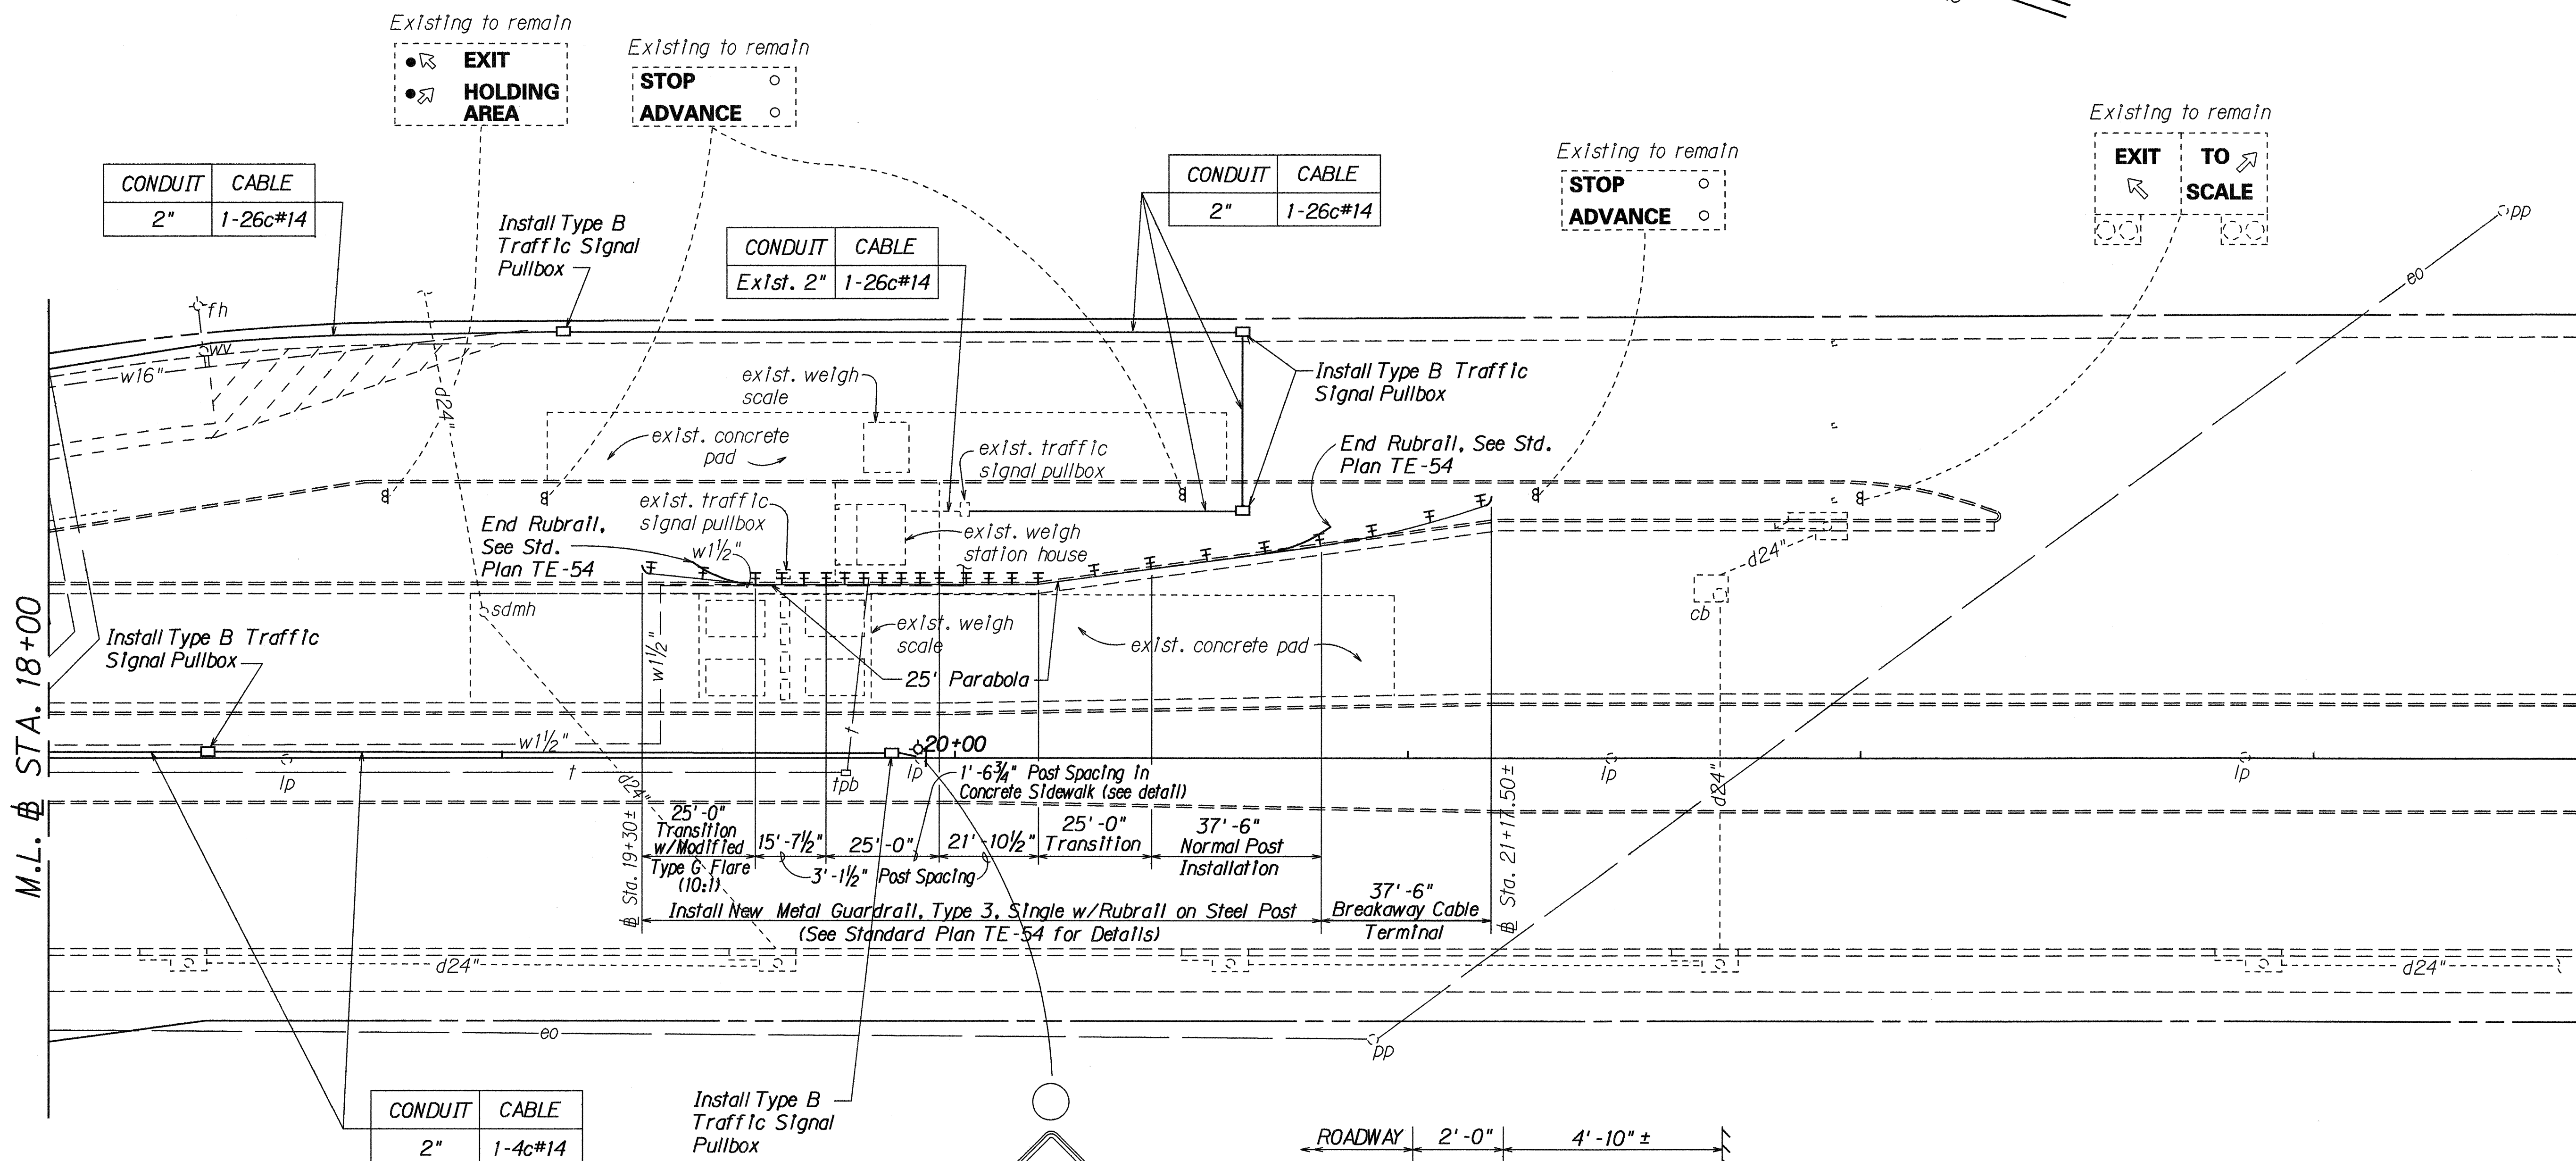

**NOTE:**  
Install a customized operator's console inside the weigh station house to operate the traffic signal system. The operating console (desk top type) shall enable the operator to manually control the traffic signals, flashing yellow lights and to display the traffic signals status. This work will be paid for under Item No. 623.2003 - Customized Operator's Console.

Install Sign & 12" Flashing Yellow Light with Bracket Mounting 12-Foot High on Exst. Hwy. Light Standard. Flasher to operate only during phase 2 and 6 yellow and red intervals.

Where guardrail posts are to be installed in concrete sidewalk, provide neat cut 7" square holes and patch with mortar. This work shall be considered incidental to the guardrail items. Any damage to the concrete sidewalk during installation by the Contractor shall be repaired at his expense.

**TYPICAL DETAIL**  
**GUARDRAIL INSTALLATION AT WEIGH STATION HOUSE**

Scale: 1/2" = 1'-0"

STATE OF HAWAII  
DEPARTMENT OF TRANSPORTATION  
HIGHWAYS DIVISION

**TRAFFIC SIGNAL PLAN**

**SAND ISLAND ACCESS ROAD**  
**Traffic Signals Vicinity of Weigh Station**

**PROJECT NO. 64A-01-92**

Scale: As Shown Date: Aug. 1992  
SHEET No. 2 OF 2 SHEETS