


FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	92A-01-67	1967	2	2

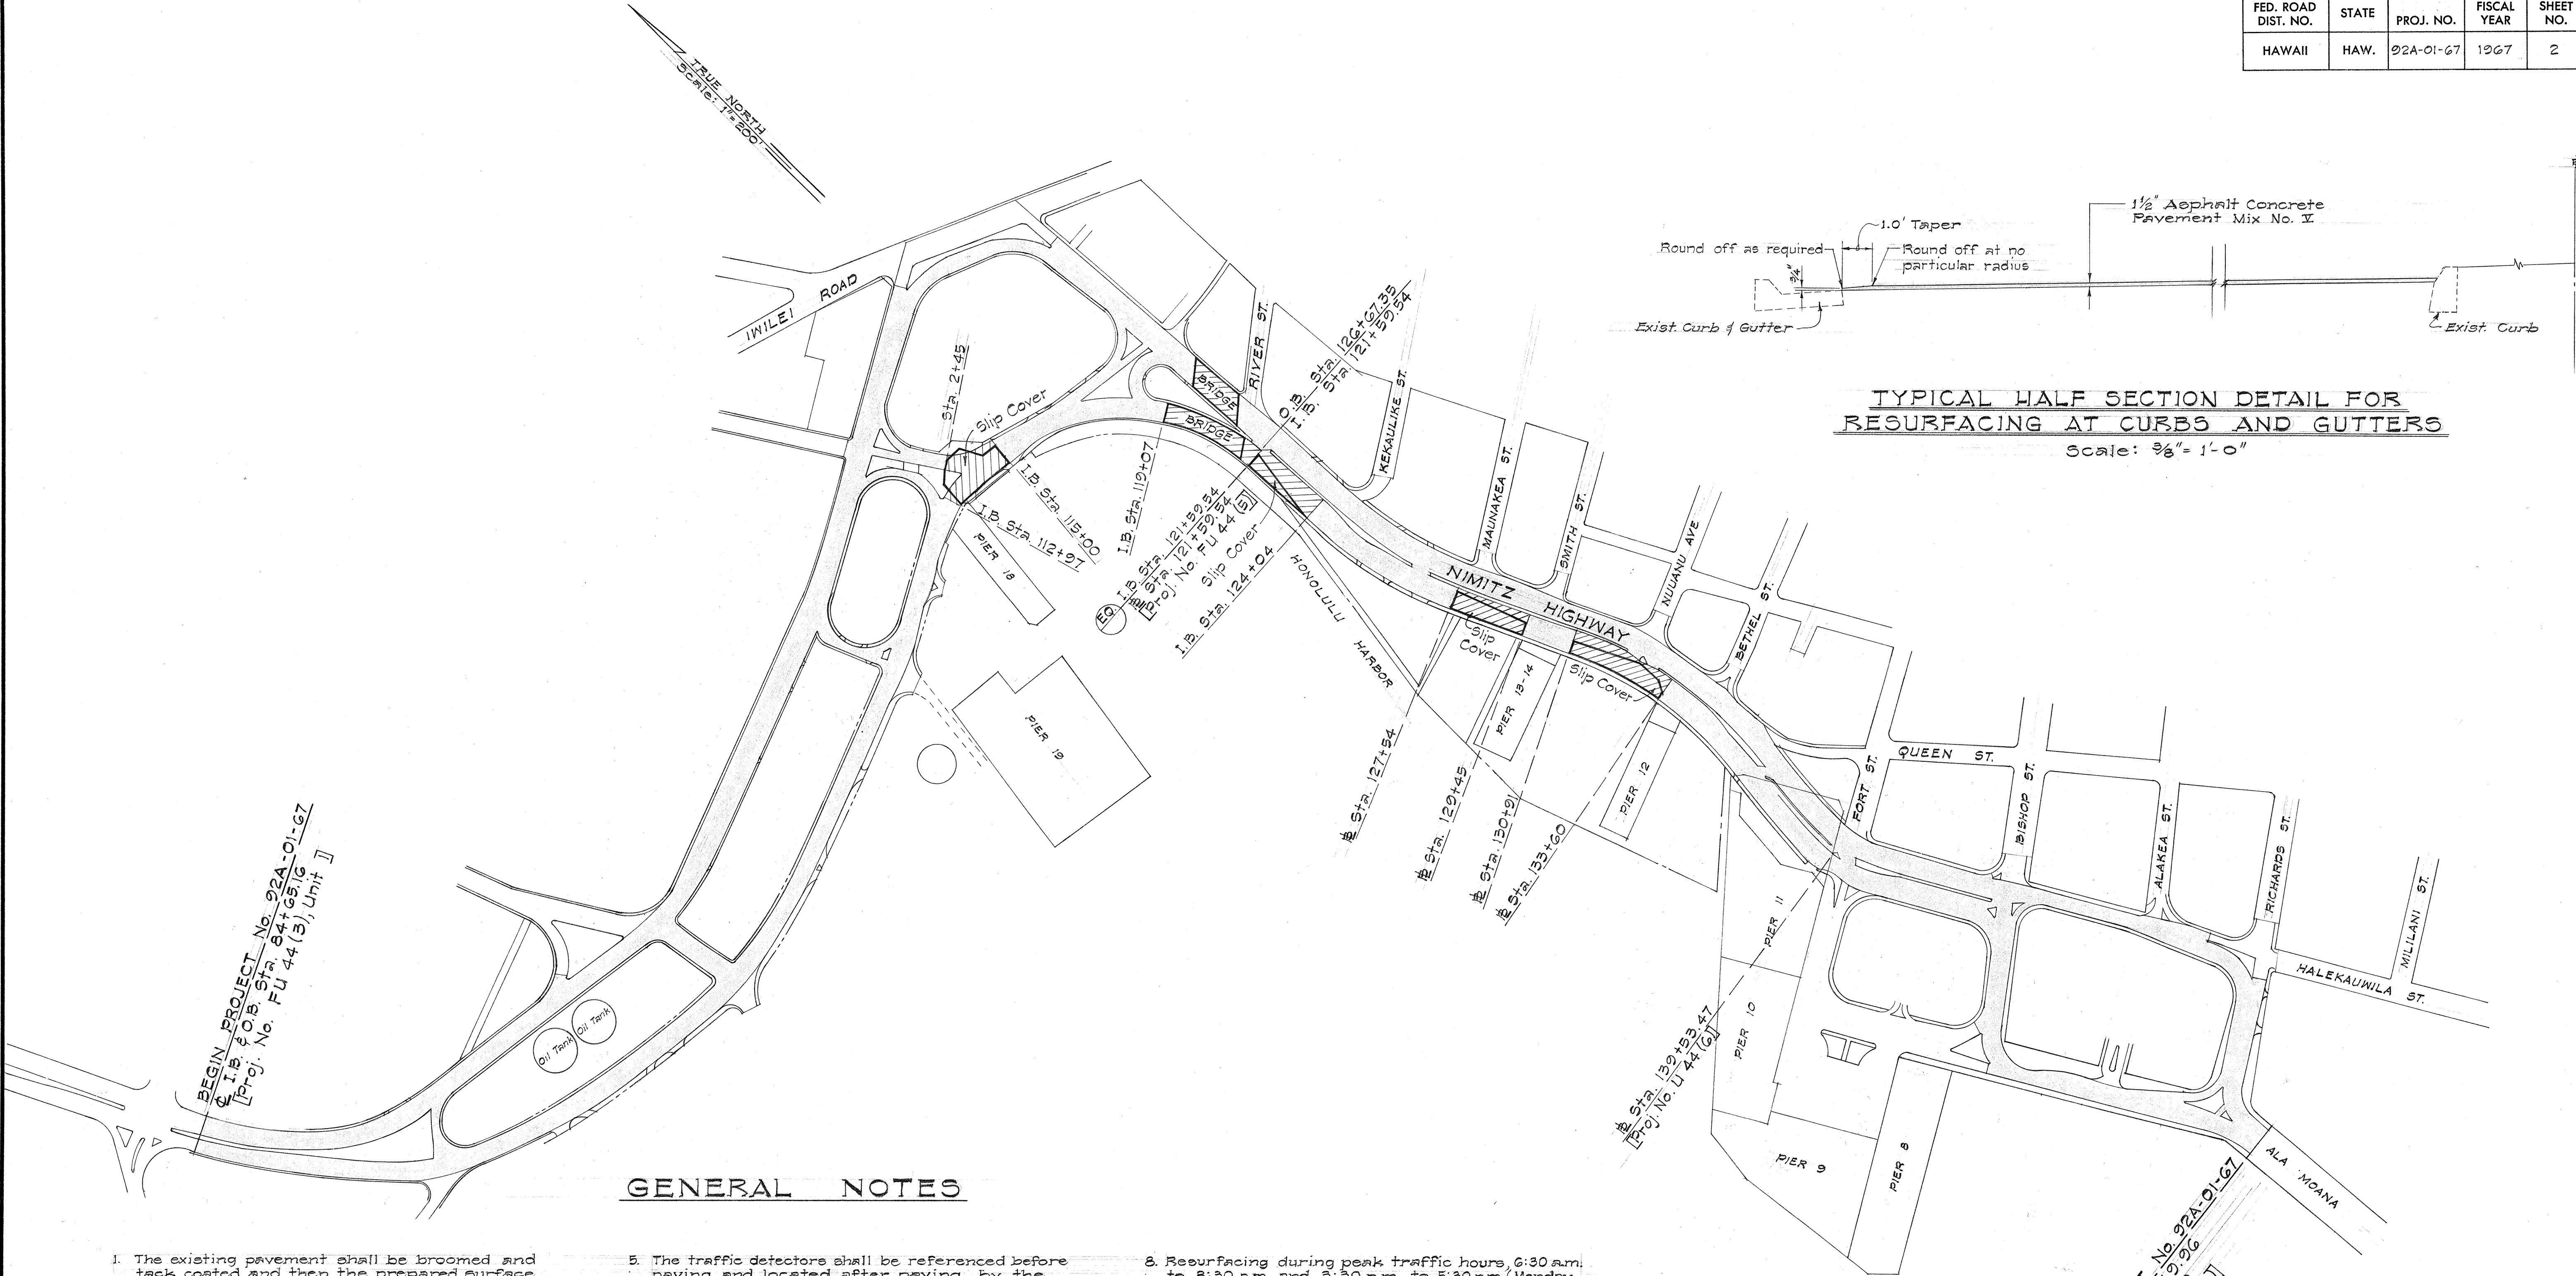

### GENERAL NOTES

- The existing pavement shall be broomed and tack coated and then the prepared surface shall be resurfaced with asphalt concrete to the thicknesses specified.
- Smooth riding connections shall be provided at the beginning and end of project and also at various side street connections. Smooth transitions shall also be provided between varying resurfacing thickness.
- All medial openings and acceleration and deceleration lanes shall be resurfaced.
- All existing centerline, baseline or reference monuments shall be referenced before resurfacing and exposed after resurfacing. Monuments with frame and cover shall be raised. This work is considered to be incidental to Asphalt Concrete Pavement and no separate payment will be made thereof.
- The traffic detectors shall be referenced before paving and located after paving by the Contractor in a manner satisfactory to the Engineer.
- Before paving, the Contractor shall reference all existing manholes in a manner satisfactory to the Engineer. In connection with this work, the Contractor shall notify all applicable utility agencies and/or companies including the U.S. Army, (Signal Corps) prior to beginning paving operations. All of this work is considered to be incidental to Asphalt Concrete Pavement and no separate payment will be made thereof.
- Hatched areas denote where bridge structures or slip covers are located and those areas as designated shall be paved with 3/4" Asphalt Concrete Mix No. V. The pavement thickness shall be transition 25 feet before and after the hatched areas.
- Resurfacing during peak traffic hours, 6:30 a.m. to 8:30 a.m. and 3:30 p.m. to 5:30 p.m. (Monday through Friday), will not be permitted and all eight lanes of Nimitz Highway shall be kept open to traffic. At all other times resurfacing shall be limited to one lane each in the inbound and outbound lanes.

BEGIN PROJECT No. 92A-01-67  
I.B. Sta. 127+45  
[Proj. No. FU 44(3), Unit ]

END PROJECT No. 92A-01-67  
O.B. Sta. 135+47  
[Proj. No. U 44(6)]

STATE OF HAWAII  
DEPARTMENT OF TRANSPORTATION  
HIGHWAYS DIVISION

RESURFACING A PORTION  
OF NIMITZ HIGHWAY  
PACIFIC ST. TOWARDS RICHARDS ST.

PROJECT No. 92A-01-67

Scale : As Noted      Date: August 1966

SHEET No. 1 OF 1 SHEETS

SURVEY PLOTTED BY	DATE
DRAWN BY	
TRACED BY	
CHECKED BY	
NOTE BOOK	
No.	