

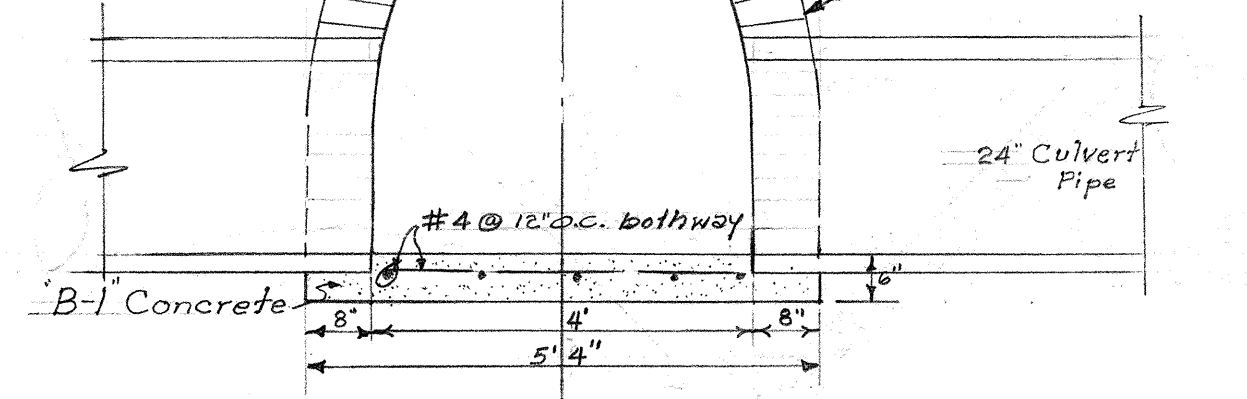



FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS

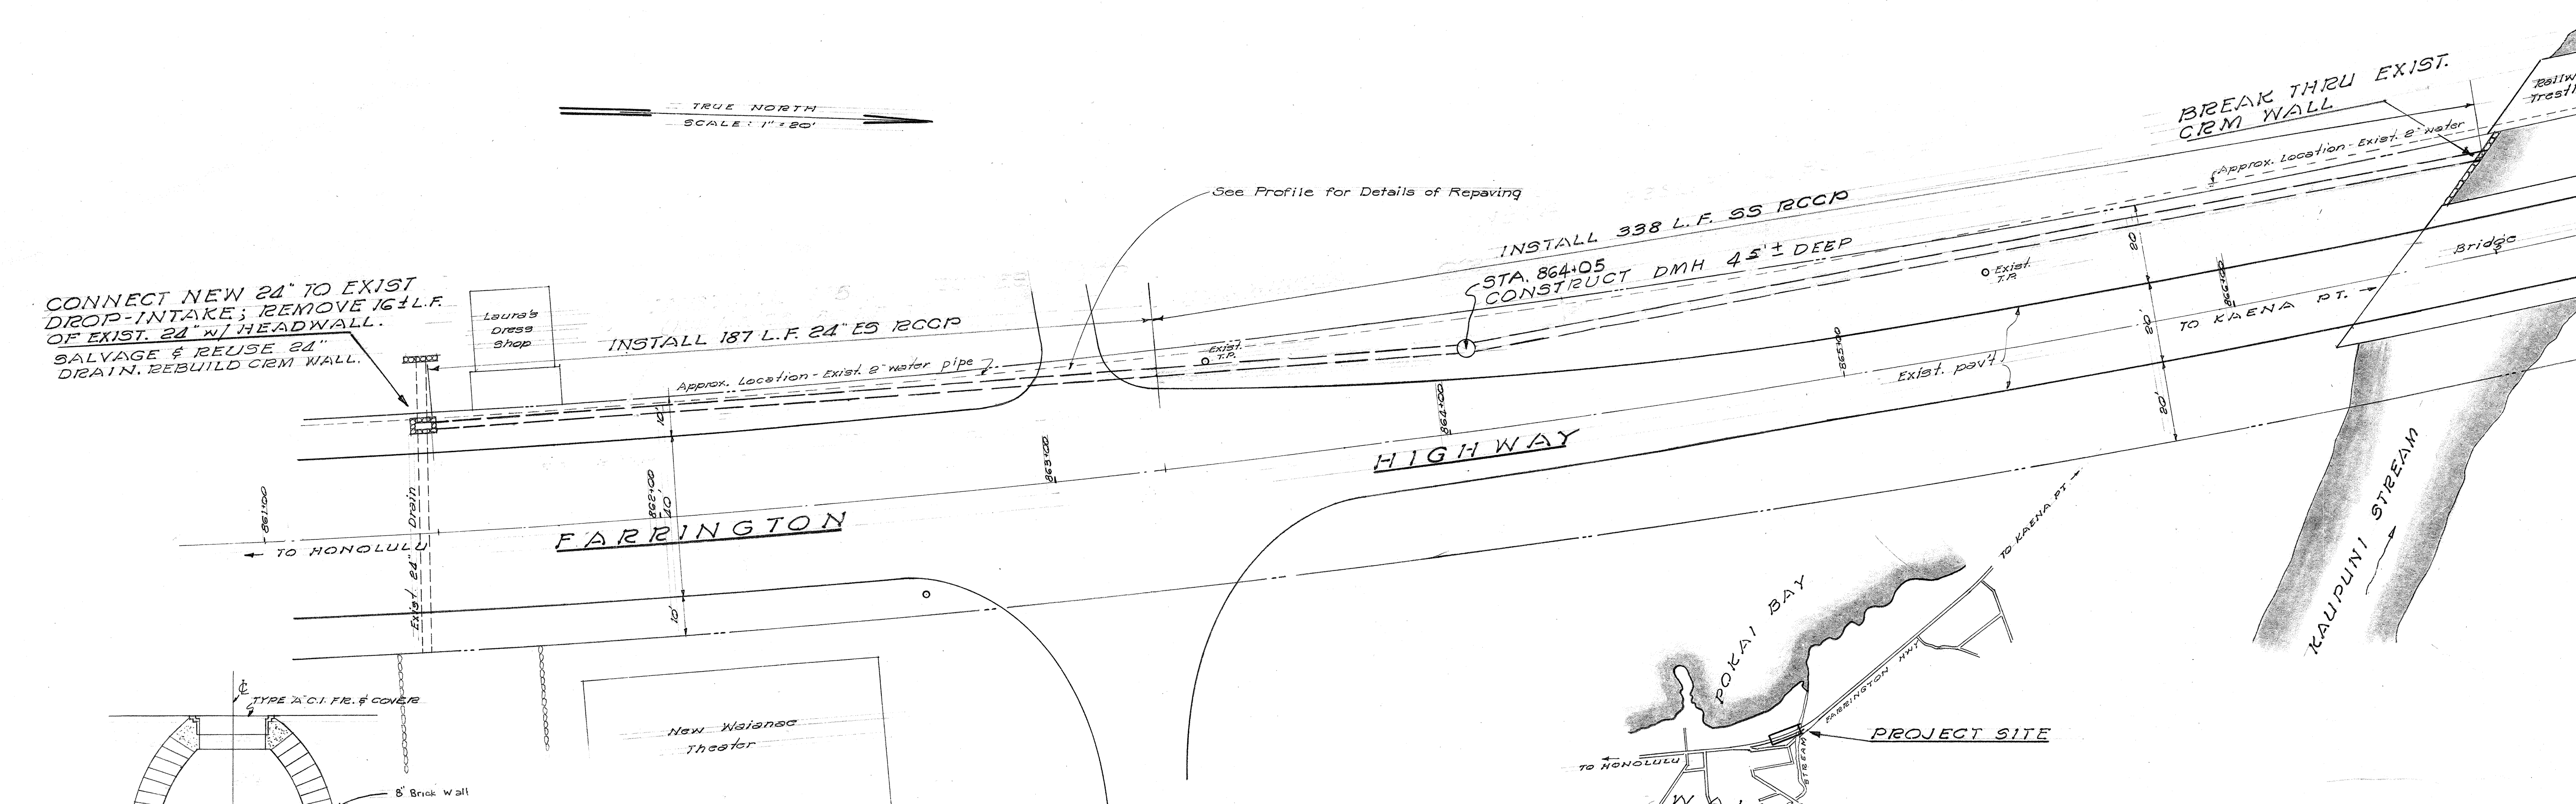

DETAIL-TYPE D DRAIN MANHOLE

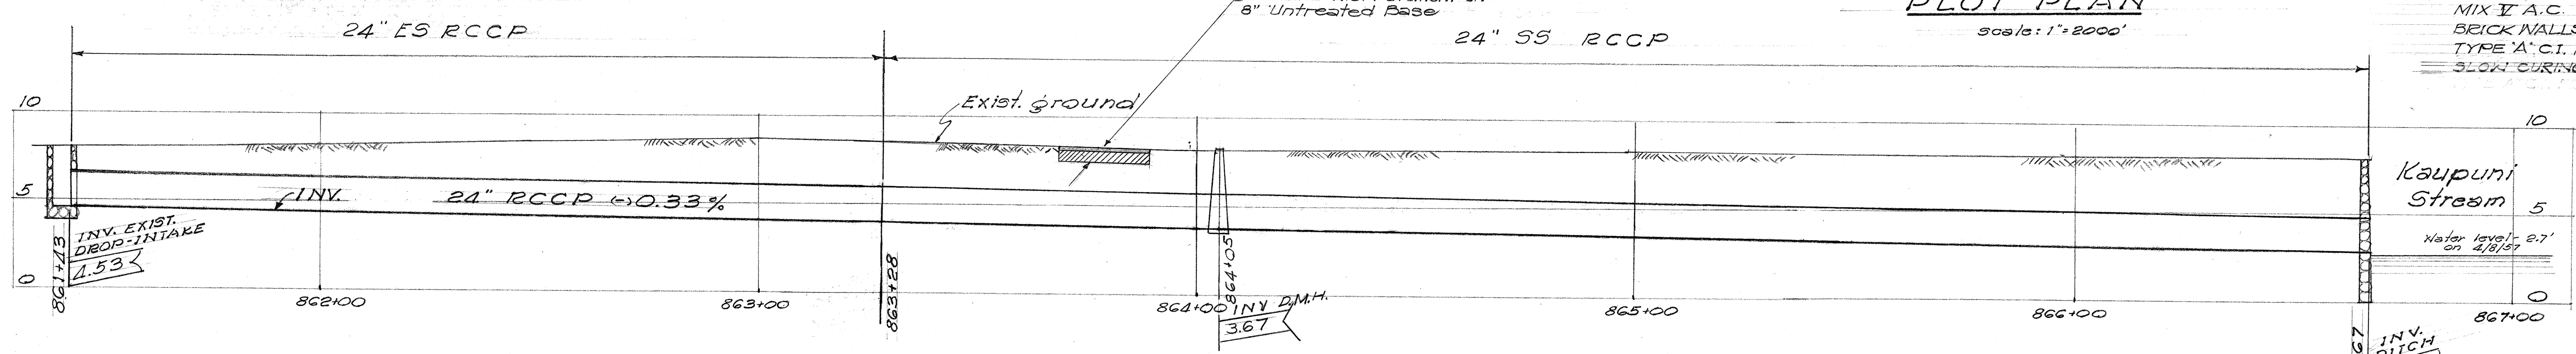

PROFILE

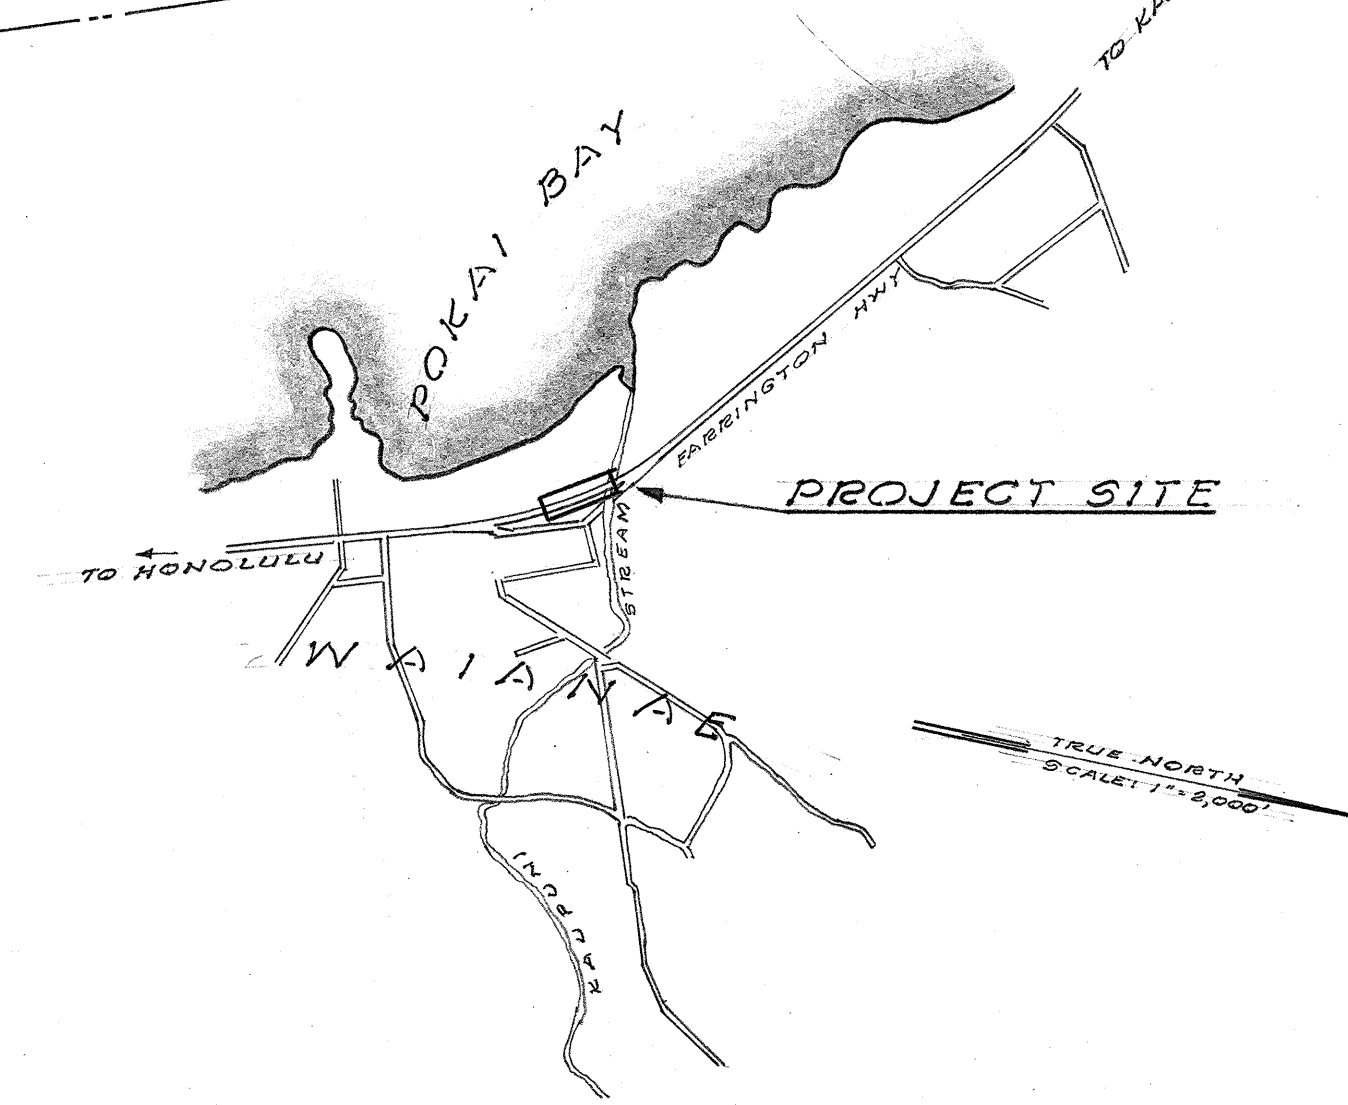

PLOT PLAN

ESTIMATED QUANTITIES

CLASS B-1 CONC.	1	cu. yd.
REINF. STEEL	30	lb.
STRUCT. EXCAV.	423	cu. yd.
24" E.S. RCCP	180	lin. ft.
24" S.S. RCCP	330	lin. ft.
CLEAN & RELAY EXIST. 24" RCCP	16	lin. ft.
CRM	2	cu. yd.
SPEINKLING	1	M. gal.
UNBEATED BASE	3	cu. yd.
MIX II A.C.	1.5	tons
BRICK WALLS FOR TYPE "A" DMH	5	lin. ft.
TYPE "A" C.I. FRAME & COVER	1	ea.
SLOW CURING ASPHALT PRIME COAT	1	gal.

TERRITORIAL HIGHWAY DEPARTMENT
TERRITORY OF HAWAII

WAIANAE DRAIN
STA. 861+43-866+67
OFF FARRINGTON HWY
JOB NO. 5929
SCALE: AS NOTED APRIL 10, 57

FILE	POCKET	FILE NO.	NO.
1577	1	3	69

SURVEY PLOTTED BY	HLI	DATE	1/57
DRAWN BY	HLI		
TRACED BY	HLI		
NOTES BY	HLI		
QUANTITIES CHECKED BY	HLI		
CHECKED BY	HLI		

5929.41