
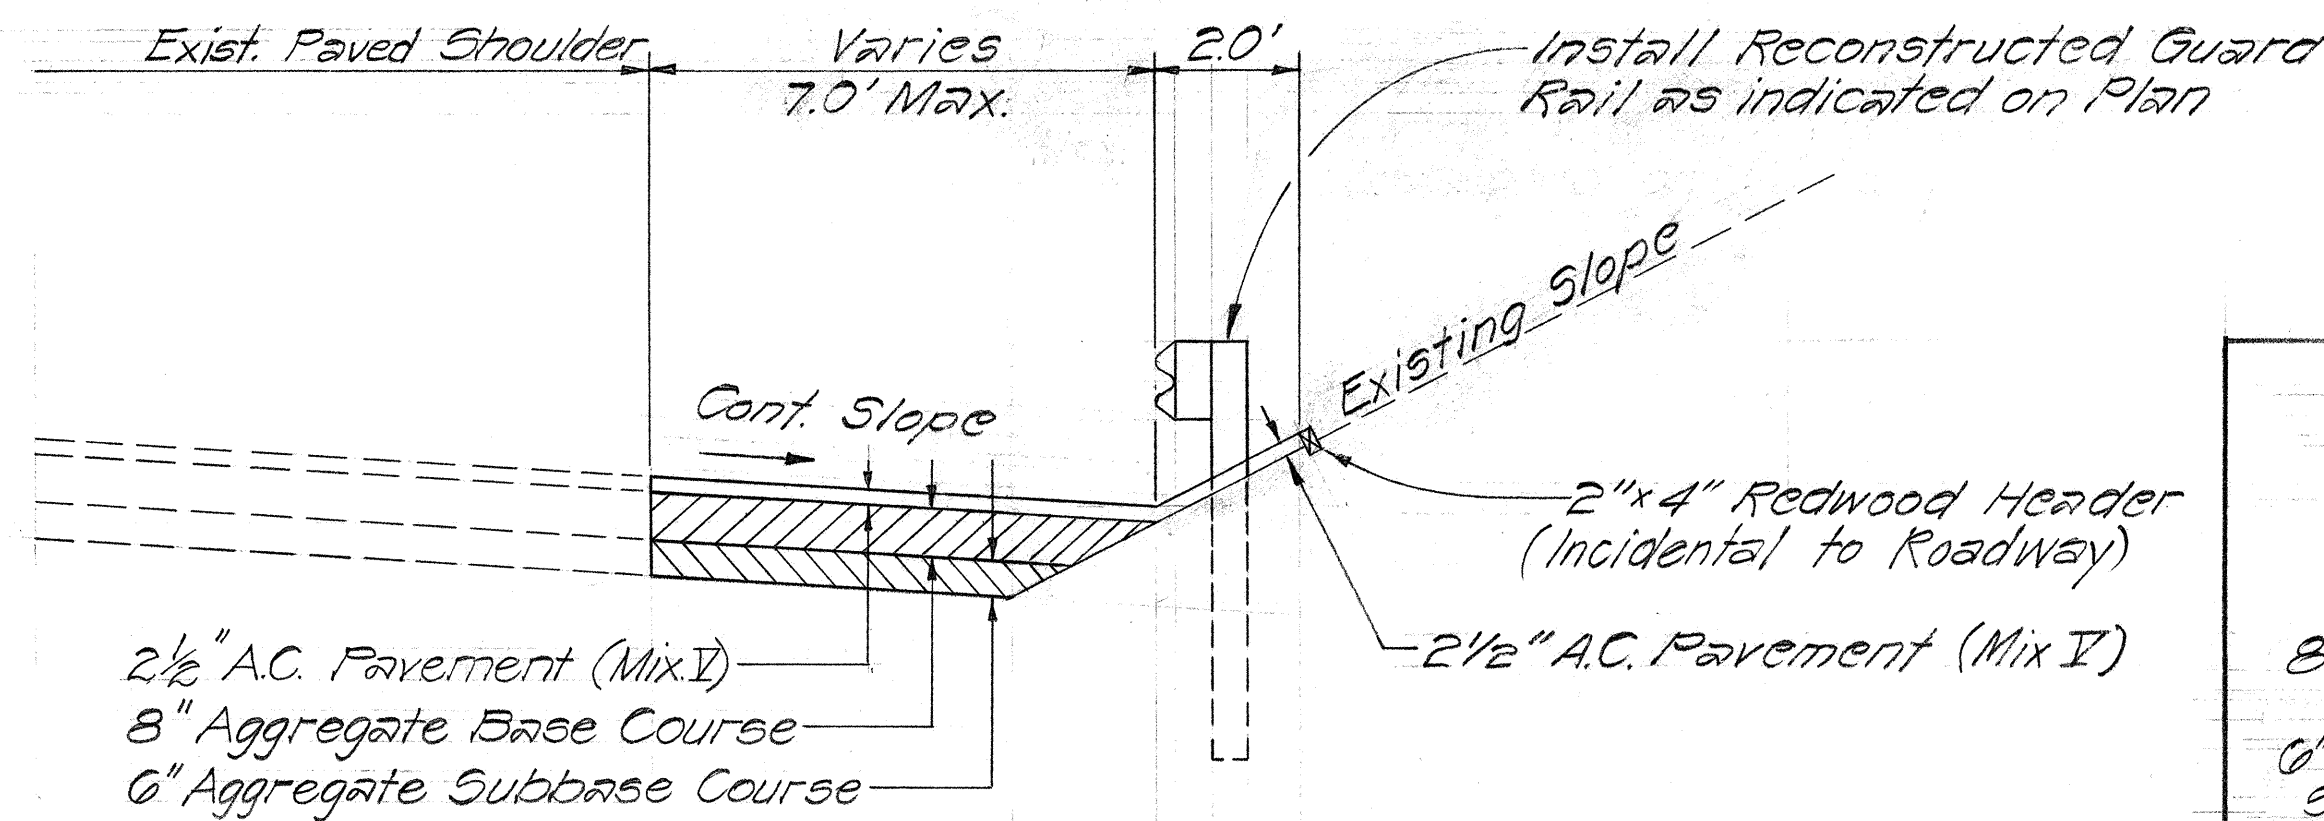



TRAFFIC SIGNAL NOTES

1. The Contractor shall coordinate all work with the City & County Department of Traffic to minimize disruption in service of the signal system. At least 3 days advance notice shall be given to the Dept. of Traffic before any work is done.
2. Splicing will be permitted however all splices shall be approved by the Dept. of Traffic.
3. All conduits under paved areas shall be encased in concrete.
4. Conduits shall be steel or PVC.
5. The existing sign on the signal standard shall be relocated with the standard.
6. Exact location of relocated signal standard to be approved by the City and County, Dept. of Traffic prior to construction.

FED. ROAD DIST. NO.	STATE	PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	20A-01-72	1972	2	10

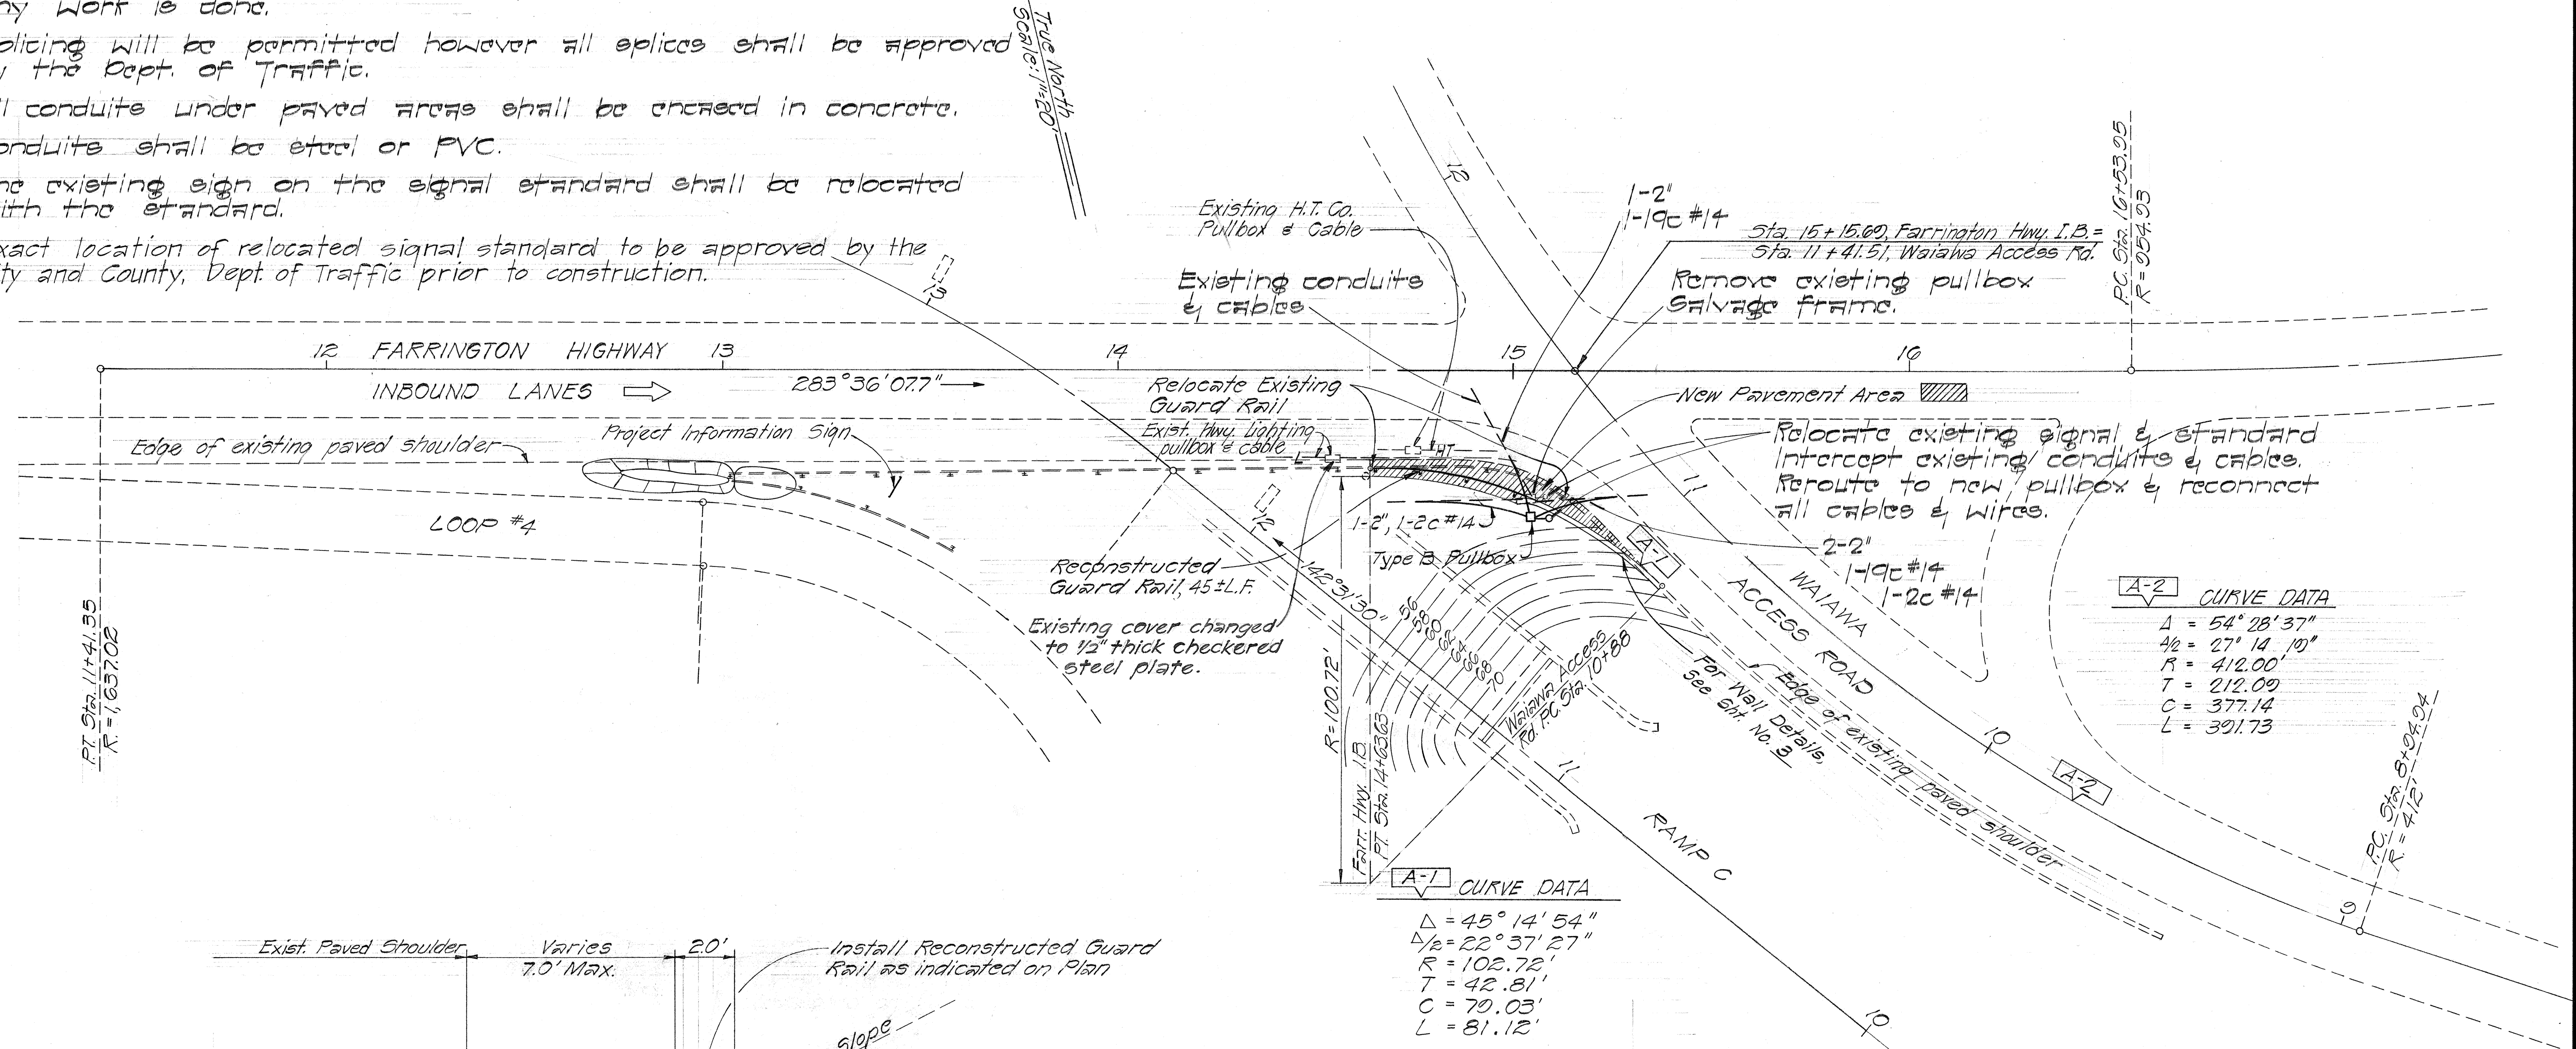


TYPICAL SECTION
Scale: 3/8"=1'-0"

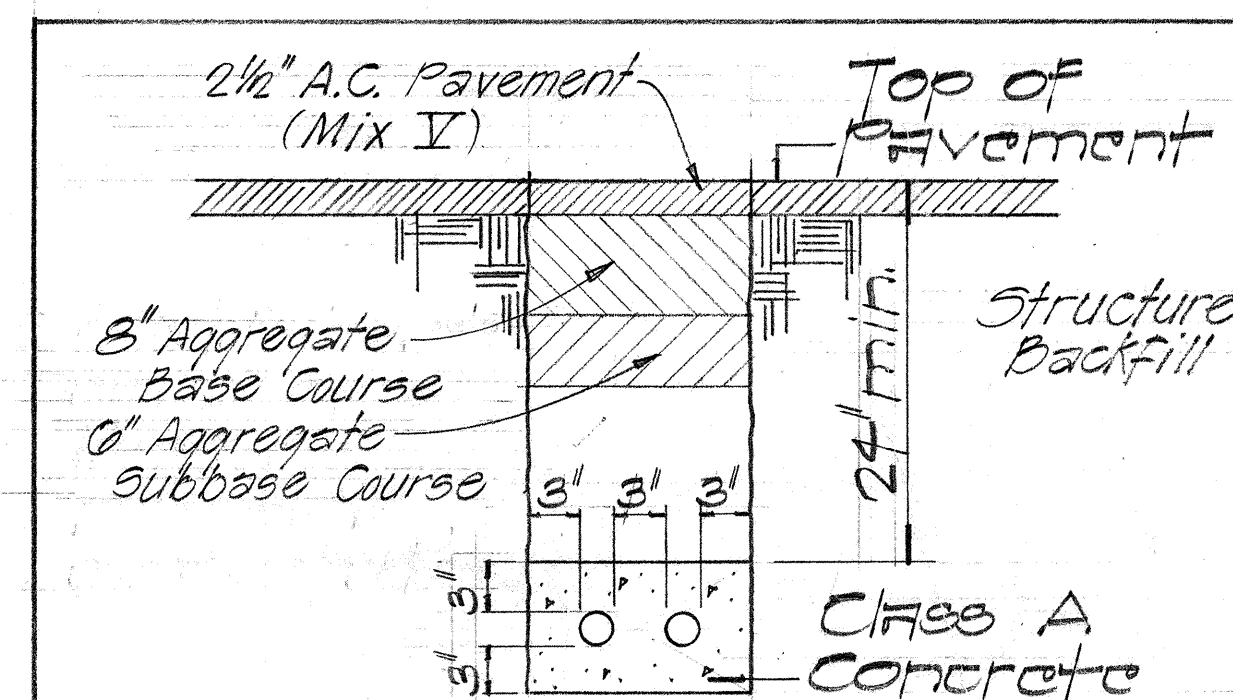

TYPICAL DETAIL OF CONDUITS ENCASED IN CONCRETE

NOT TO SCALE
NOTE: Pavement required only in roadway areas.

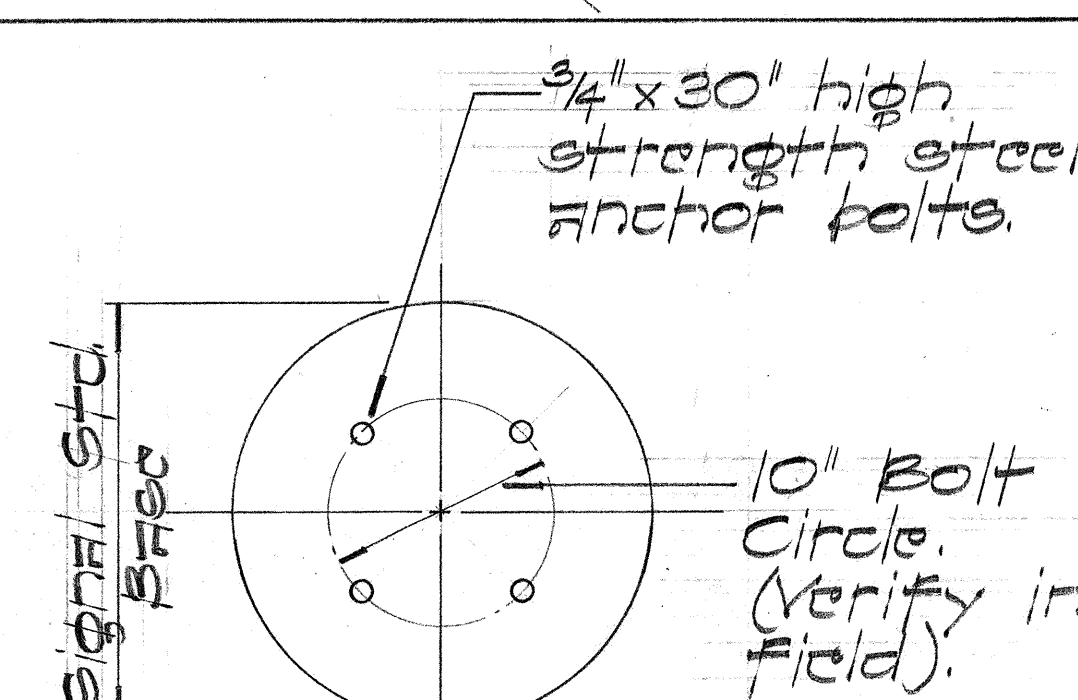

ANCHOR BOLT DATA
NOT TO SCALE

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ROADWAY DETAILS AND TRAFFIC SIGNAL SYSTEM

FARRINGTON HIGHWAY
I.B. Right Turn Lane to Leeward College
Project No. 20A-01-72

Scale: As Shown Date: Sept. 1972

SHEET No. 1 OF 1 SHEETS