


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	DE-0200(803)	2000	7	79

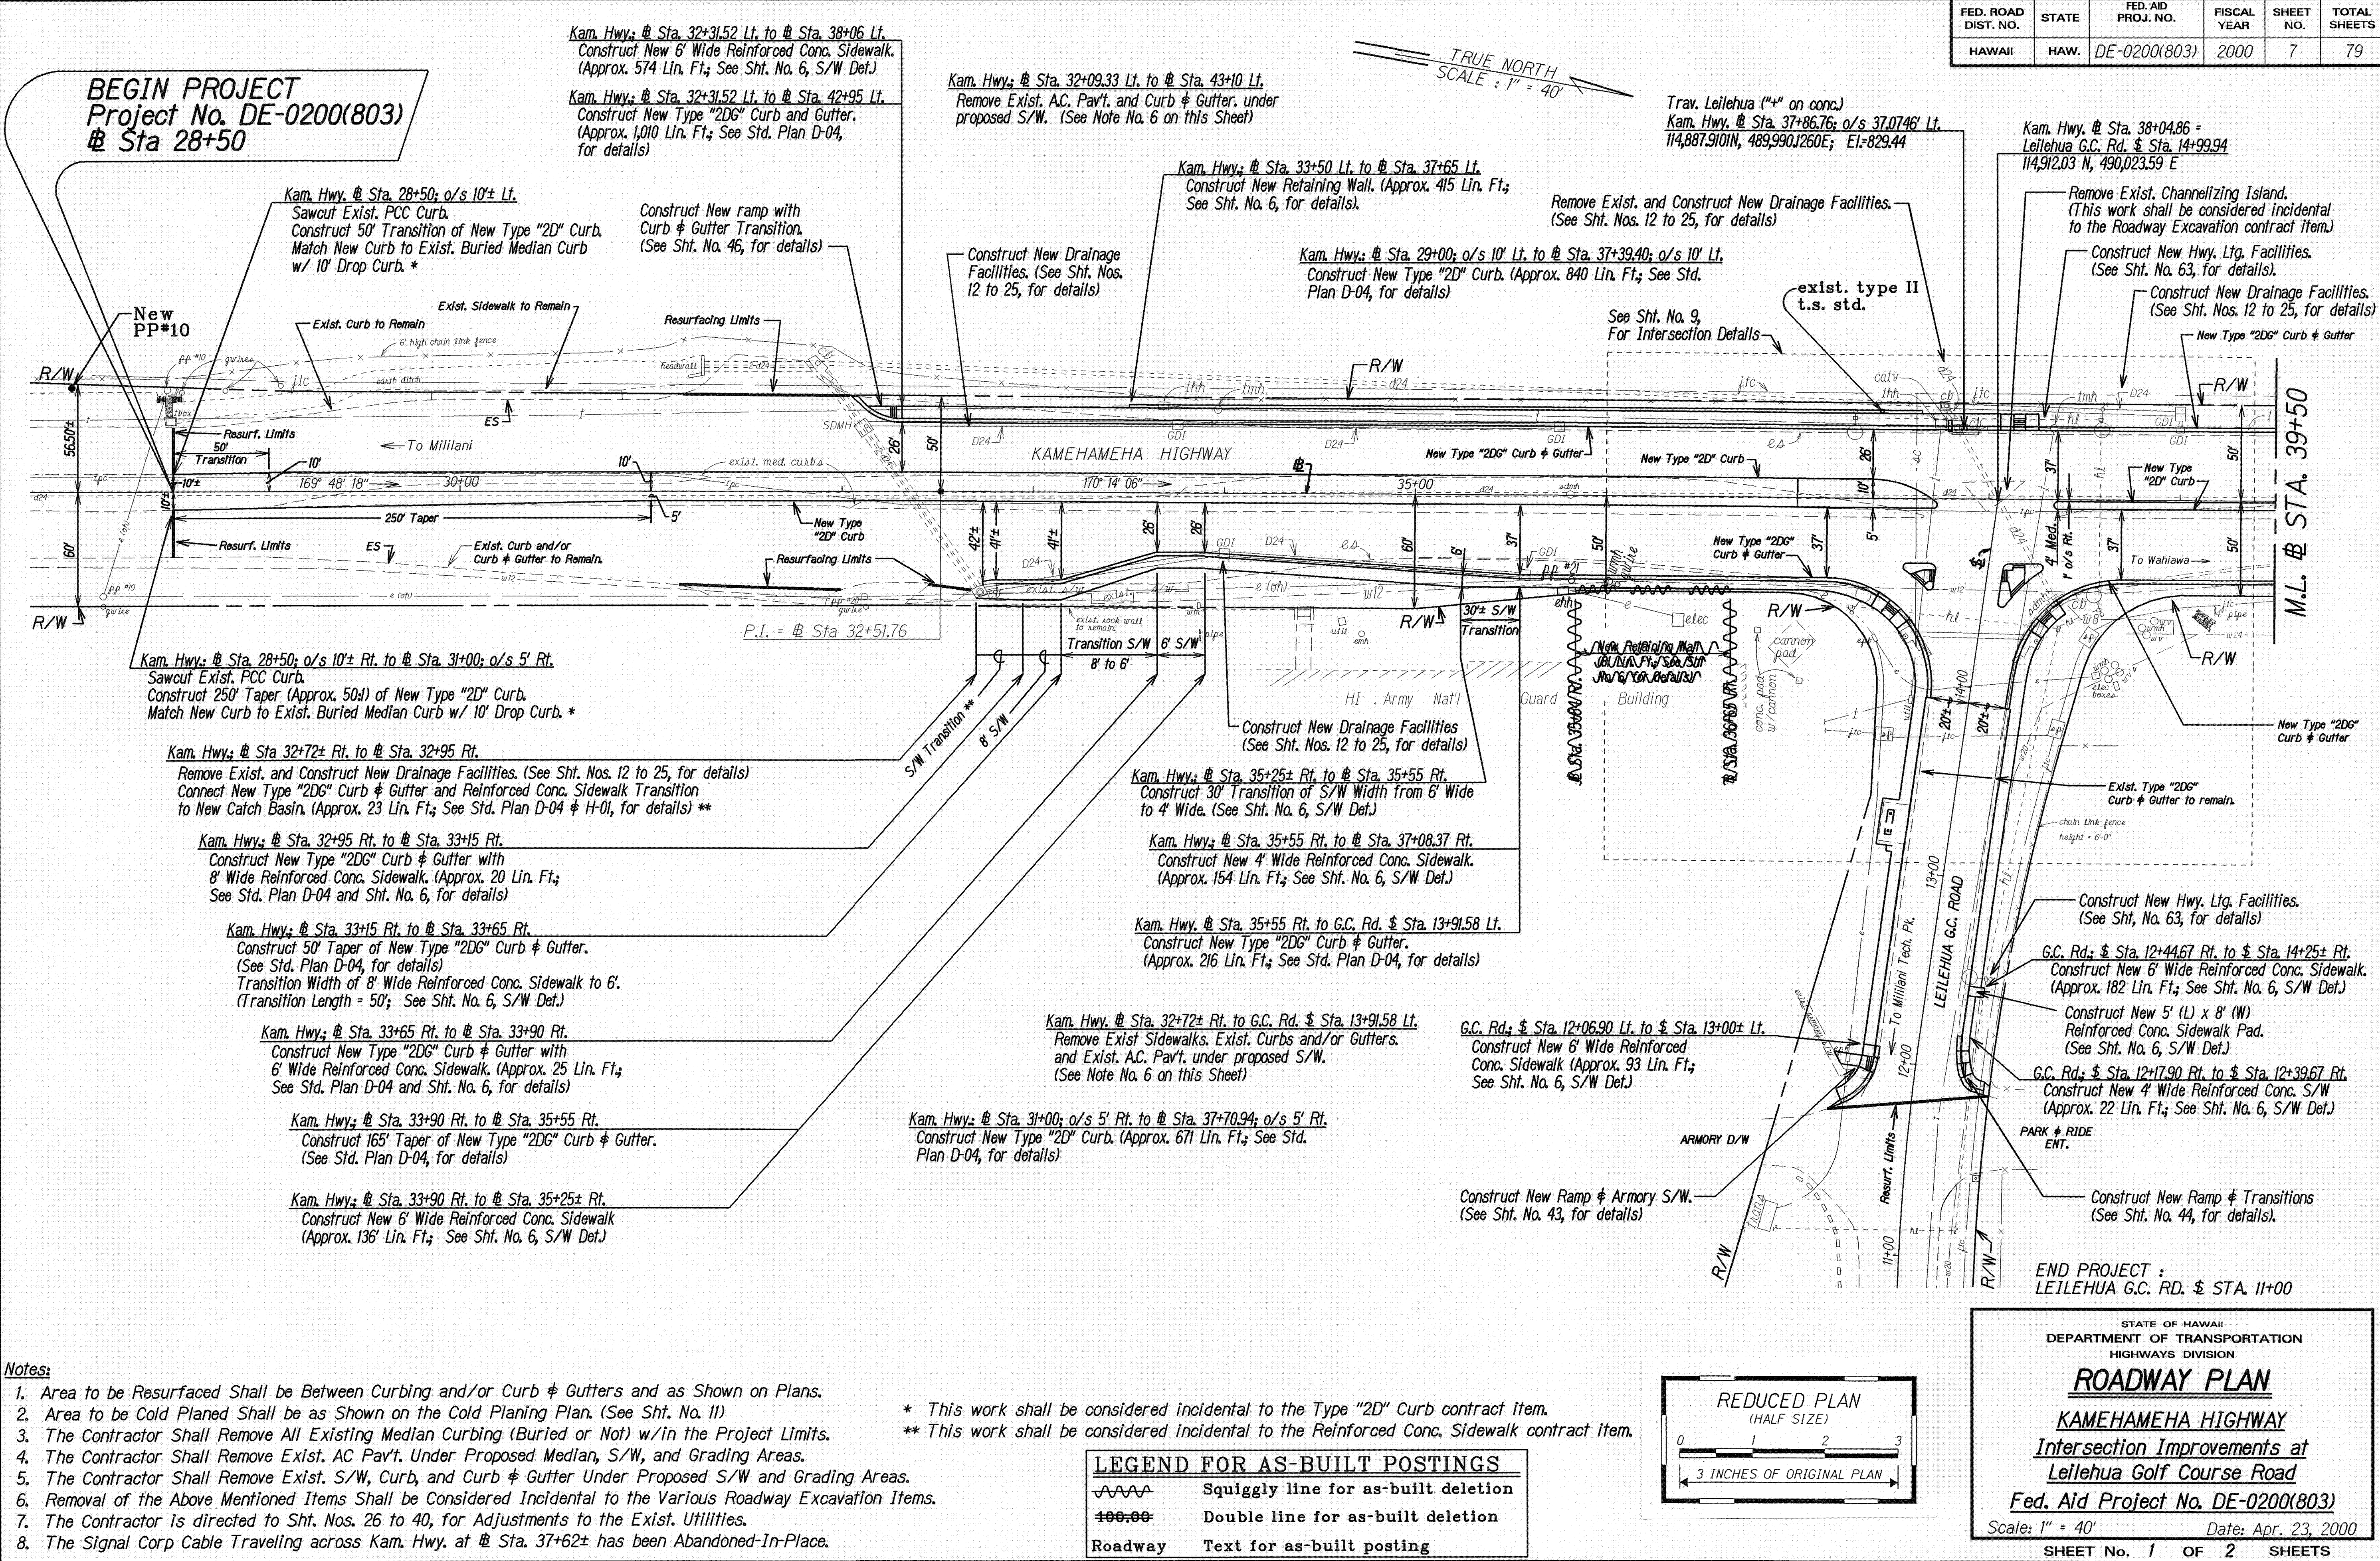


Notes:

1. Area to be Resurfaced Shall be Between Curbing and/or Curb & Gutters and as Shown on Plans.
2. Area to be Cold Planed Shall be as Shown on the Cold Planing Plan. (See Sht. No. 11)
3. The Contractor Shall Remove All Existing Median Curbing (Buried or Not) w/in the Project Limits.
4. The Contractor Shall Remove Exist. AC Pav't. Under Proposed Median, S/W, and Grading Areas.
5. The Contractor Shall Remove Exist. S/W, Curb, and Curb & Gutter Under Proposed S/W and Grading Areas.
6. Removal of the Above Mentioned Items Shall be Considered Incidental to the Various Roadway Excavation Items.
7. The Contractor is directed to Sht. Nos. 26 to 40, for Adjustments to the Exist. Utilities.
8. The Signal Corp Cable Traveling across Kam. Hwy. at Sta. 37+62± has been Abandoned-In-Place.

- * This work shall be considered incidental to the Type "2D" Curb contract item.
** This work shall be considered incidental to the Reinforced Conc. Sidewalk contract item.

FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	DE-0200(803)	2000	8	79

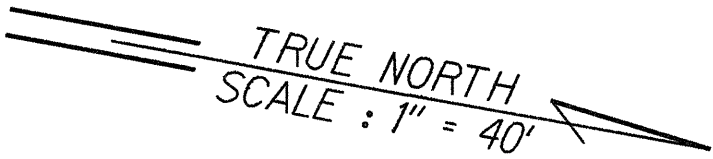

Kam. Hwy. @ Sta. 38+35.99; o/s 1' Rt. to @ Sta. 40+95; o/s 1' Rt.
Construct New Type "2D" Curb. (Approx. 259 Lin. Ft.; See Std. Plan D-04 for details)

Kam. Hwy. @ Sta. 40+95; o/s 1' Rt. to @ Sta. 42+60; o/s 10' Lt.
Construct 165' Taper (Approx. 154) of New Type "2D" Curb.
Connect New Curb to New Curbs at both ends


Kam. Hwy. @ Sta. 42+60; o/s 10' Lt. to @ Sta. 46+50; o/s 10' Lt.
Construct New Type "2D" Curb. (Approx. 390 Lin. Ft.; See Std. Plan D-04 for details)

Kam. Hwy. @ Sta. 40+95
End New Conc. Median
(See Sht. No. 6, Sidewalk Detail)

Kam. Hwy. @ Sta. 42+95 Lt. to @ Sta. 43+10 Lt.
Construct 15' Transition of New Type "2DG" Curb & Gutter.
Sawcut Existing Curb & Gutter at @ Sta. 43+10 Lt.
Match New Transition to Exist. Curb & Gutter at @ Sta. 43+10 Lt. **

Kam. Hwy. @ Sta. 47+00; o/s 10'± Rt.
Sawcut Exist. Buried Median Curb
Construct 50' Transition of New Type "2D" Curb.
Match New Curb to Exist. Buried Median Curb w/ 10' Drop Curb. *

END Project
Project No. DE-0200(803)
@ Sta 47+00

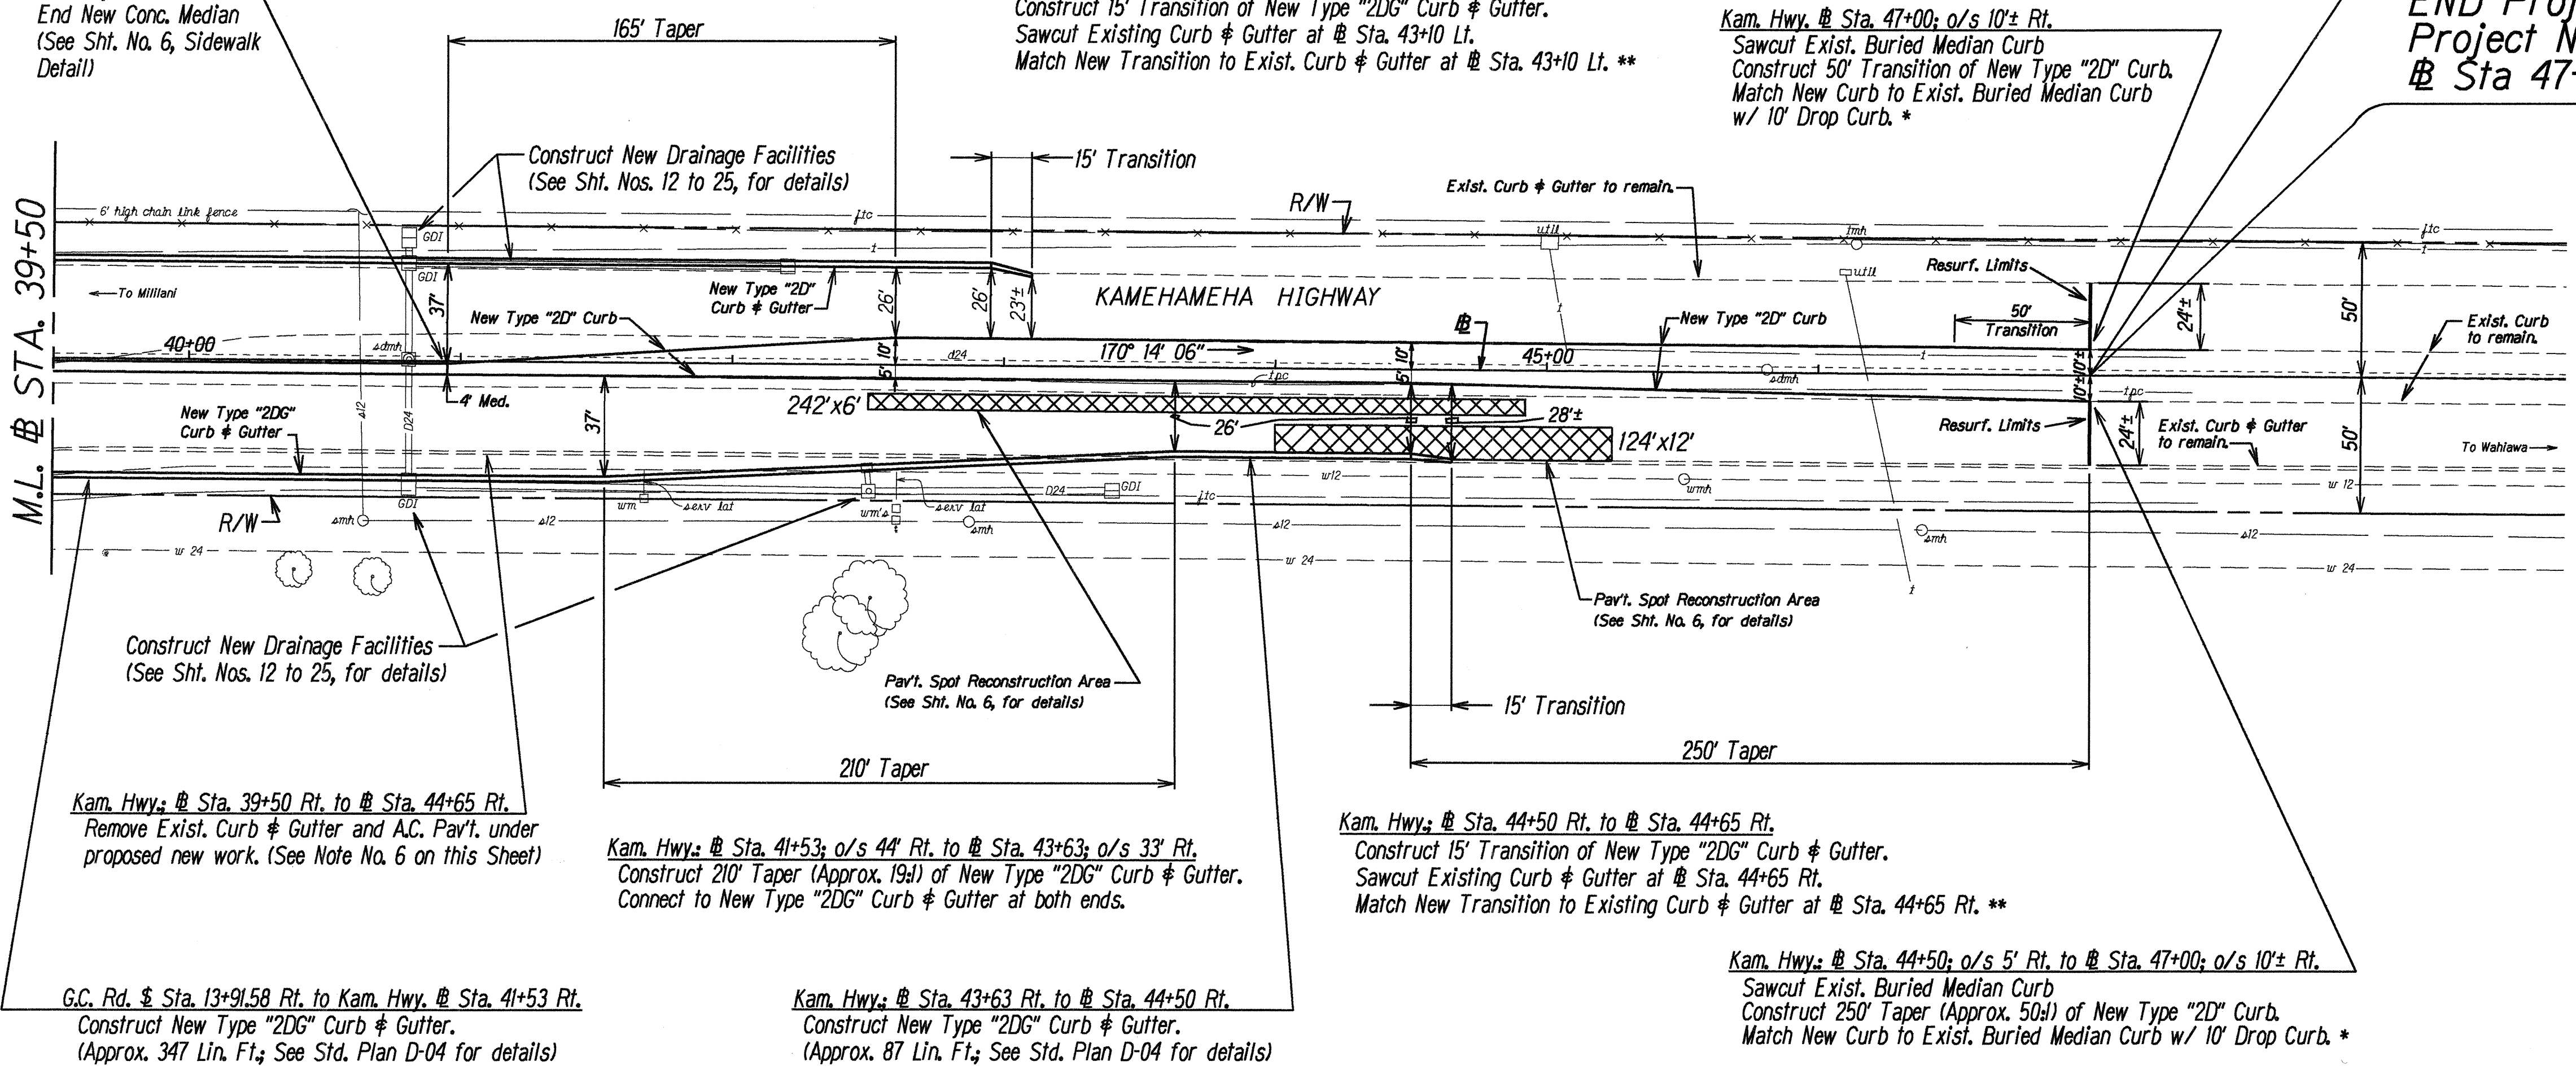

Kam. Hwy. @ Sta. 39+50 Rt. to @ Sta. 44+65 Rt.
Remove Exist. Curb & Gutter and A.C. Pav't. under proposed new work. (See Note No. 6 on this Sheet)

Kam. Hwy. @ Sta. 41+53; o/s 44' Rt. to @ Sta. 43+63; o/s 33' Rt.
Construct 210' Taper (Approx. 194) of New Type "2DG" Curb & Gutter.
Connect to New Type "2DG" Curb & Gutter at both ends.

Kam. Hwy. @ Sta. 44+50 Rt. to @ Sta. 44+65 Rt.
Construct 15' Transition of New Type "2DG" Curb & Gutter.
Sawcut Existing Curb & Gutter at @ Sta. 44+65 Rt.
Match New Transition to Existing Curb & Gutter at @ Sta. 44+65 Rt. **

Kam. Hwy. @ Sta. 44+50; o/s 5' Rt. to @ Sta. 47+00; o/s 10'± Rt.
Sawcut Exist. Buried Median Curb
Construct 250' Taper (Approx. 504) of New Type "2D" Curb.
Match New Curb to Exist. Buried Median Curb w/ 10' Drop Curb. *

G.C. Rd. @ Sta. 13+91.58 Rt. to Kam. Hwy. @ Sta. 41+53 Rt.
Construct New Type "2DG" Curb & Gutter.
(Approx. 347 Lin. Ft.; See Std. Plan D-04 for details)

Kam. Hwy. @ Sta. 43+63 Rt. to @ Sta. 44+50 Rt.
Construct New Type "2DG" Curb & Gutter.
(Approx. 87 Lin. Ft.; See Std. Plan D-04 for details)

Kam. Hwy. @ Sta. 38+35.99; o/s 5' Rt. to @ Sta. 44+50; o/s 5' Rt.
Construct New Type "2D" Curb. (Approx. 614 Lin. Ft.; See Std. Plan D-04 for details)

Notes:

1. Area to be Resurfaced Shall be Between Curbing and/or Curb & Gutters and as Shown on Plans.
2. Area to be Cold Planed Shall be as Shown on the Cold Planing Plan. (See Sht. No. 11)
3. The Contractor Shall Remove All Existing Median Curbing (Buried or Not) w/in the Project Limits.
4. The Contractor Shall Remove Exist. AC Pav't. Under Proposed Curb & Gutter, Median, and Grading Areas.
5. The Contractor Shall Remove Exist. Curb and/or Gutter Under Proposed Curb & Gutter, Median and Grading Areas.
6. Removal of the Above Mentioned Items Shall be Considered Incidental to the Various Roadway Excavation Items.
7. The Contractor is directed to Sht. Nos. 26 to 40, for Adjustments to the Exist. Utilities.

- * This work shall be considered incidental to the Type "2D" Curb contract item.
- ** This work shall be considered incidental to the Type "2DG" Curb & Gutter contract item.

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

ROADWAY PLAN

KAMEHAMEHA HIGHWAY

Intersection Improvements at
Leilehua Golf Course Road

Fed. Aid Project No. DE-0200(803)

Scale: 1" = 40' Date: May 2, 2000

SHEET No. 2 OF 2 SHEETS