


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-710(1)	1998	5	16

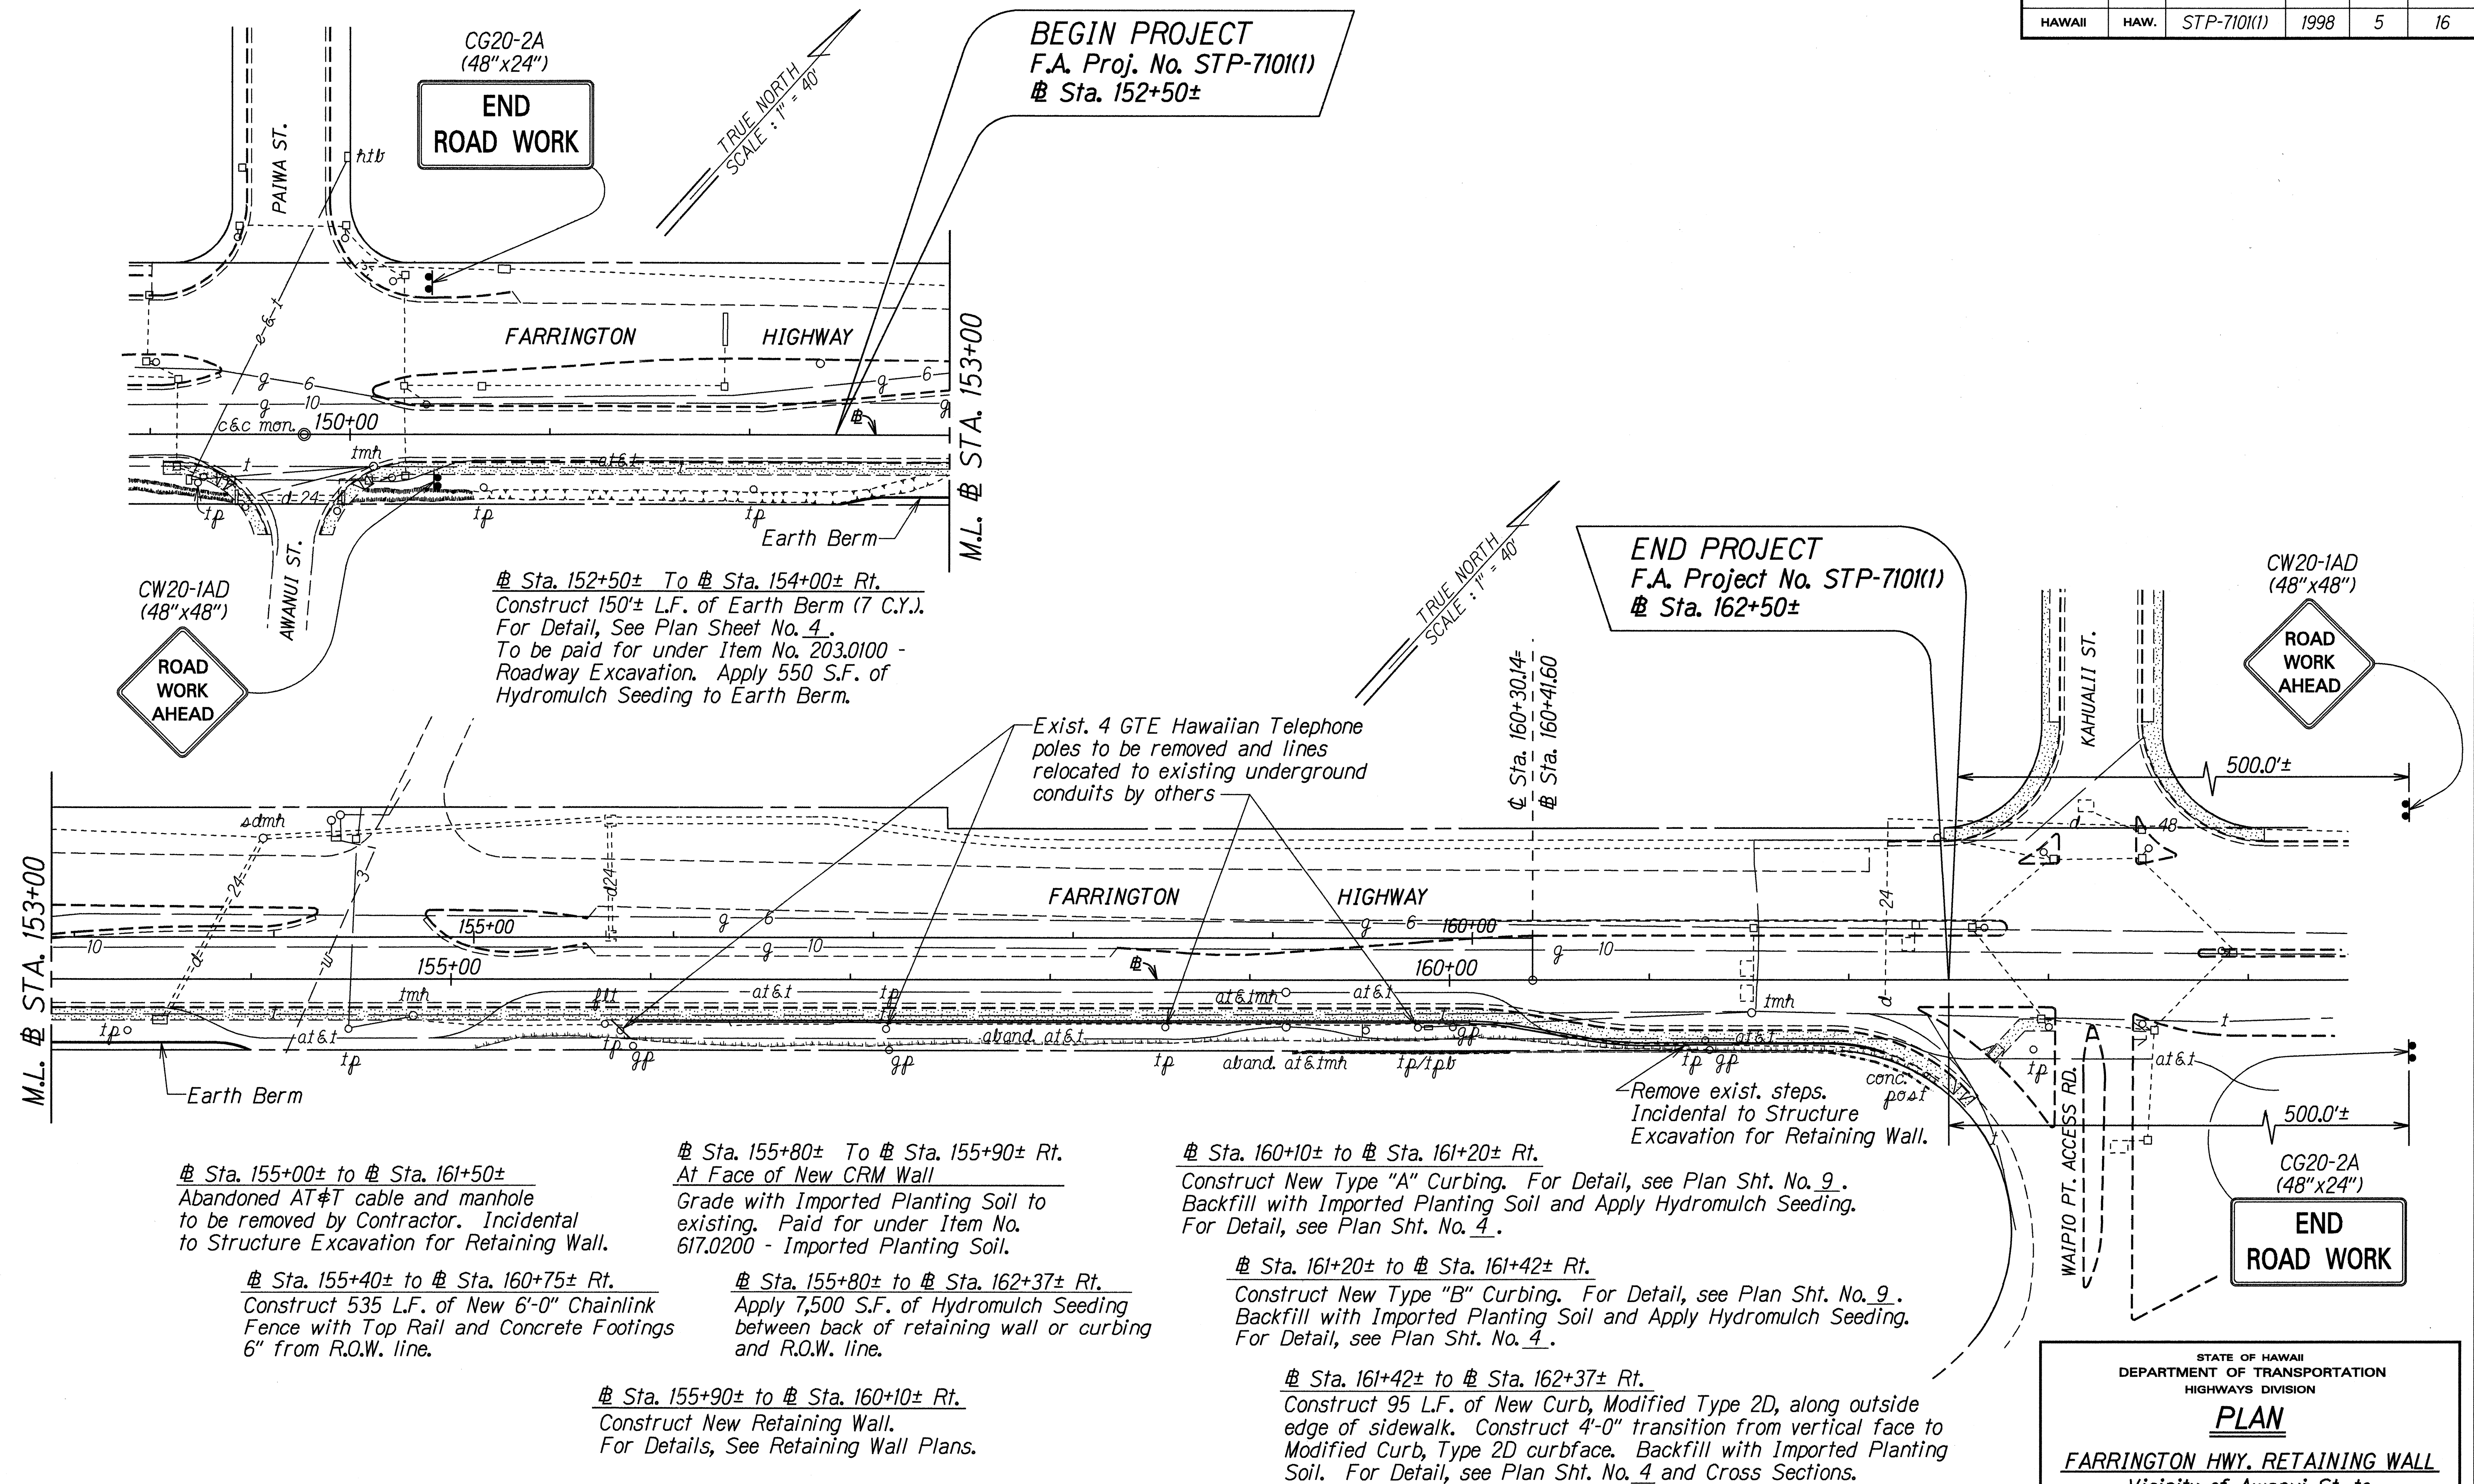

Sta. 155+00± to Sta. 161+50±
Abandoned AT&T cable and manhole to be removed by Contractor. Incidental to Structure Excavation for Retaining Wall.

Sta. 155+40± to Sta. 160+75± Rt.
Construct 535 L.F. of New 6'-0" Chainlink Fence with Top Rail and Concrete Footings 6" from R.O.W. line.

Sta. 155+80± to Sta. 155+90± Rt.
At Face of New CRM Wall
Grade with Imported Planting Soil to existing. Paid for under Item No. 617.0200 - Imported Planting Soil.

Sta. 155+80± to Sta. 162+37± Rt.
Apply 7,500 S.F. of Hydromulch Seeding between back of retaining wall or curbing and R.O.W. line.

Sta. 155+90± to Sta. 160+10± Rt.
Construct New Retaining Wall.
For Details, See Retaining Wall Plans.

Sta. 160+10± to Sta. 161+20± Rt.
Construct New Type "A" Curbing. For Detail, see Plan Sht. No. 9.
Backfill with Imported Planting Soil and Apply Hydromulch Seeding. For Detail, see Plan Sht. No. 4.

Sta. 161+20± to Sta. 161+42± Rt.
Construct New Type "B" Curbing. For Detail, see Plan Sht. No. 9.
Backfill with Imported Planting Soil and Apply Hydromulch Seeding. For Detail, see Plan Sht. No. 4.

Sta. 161+42± to Sta. 162+37± Rt.
Construct 95 L.F. of New Curb, Modified Type 2D, along outside edge of sidewalk. Construct 4'-0" transition from vertical face to Modified Curb, Type 2D curbface. Backfill with Imported Planting Soil. For Detail, see Plan Sht. No. 4 and Cross Sections.

ORIGINAL PLAN	DATE
SURVEY PLANNED BY	15/12/98
DRAWN BY	L. Misquash, M.L.
CHECKED BY	
NOTES	
BOOK	
DATE	
QUANTITIES BY	
NO.	

STATE OF HAWAII
DEPARTMENT OF TRANSPORTATION
HIGHWAYS DIVISION

PLAN
FARRINGTON HWY. RETAINING WALL
 Vicinity of Awanui St. to
 Waipio Pt. Access Rd.
 F.A. Proj. No. STP-710(1)

Scale: 1"=40'
 Date: April 1998
 SHEET No. 1 OF 1 SHEETS