


FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	FISCAL YEAR	SHEET NO.	TOTAL SHEETS
HAWAII	HAW.	STP-8930(2)	2007	319	331

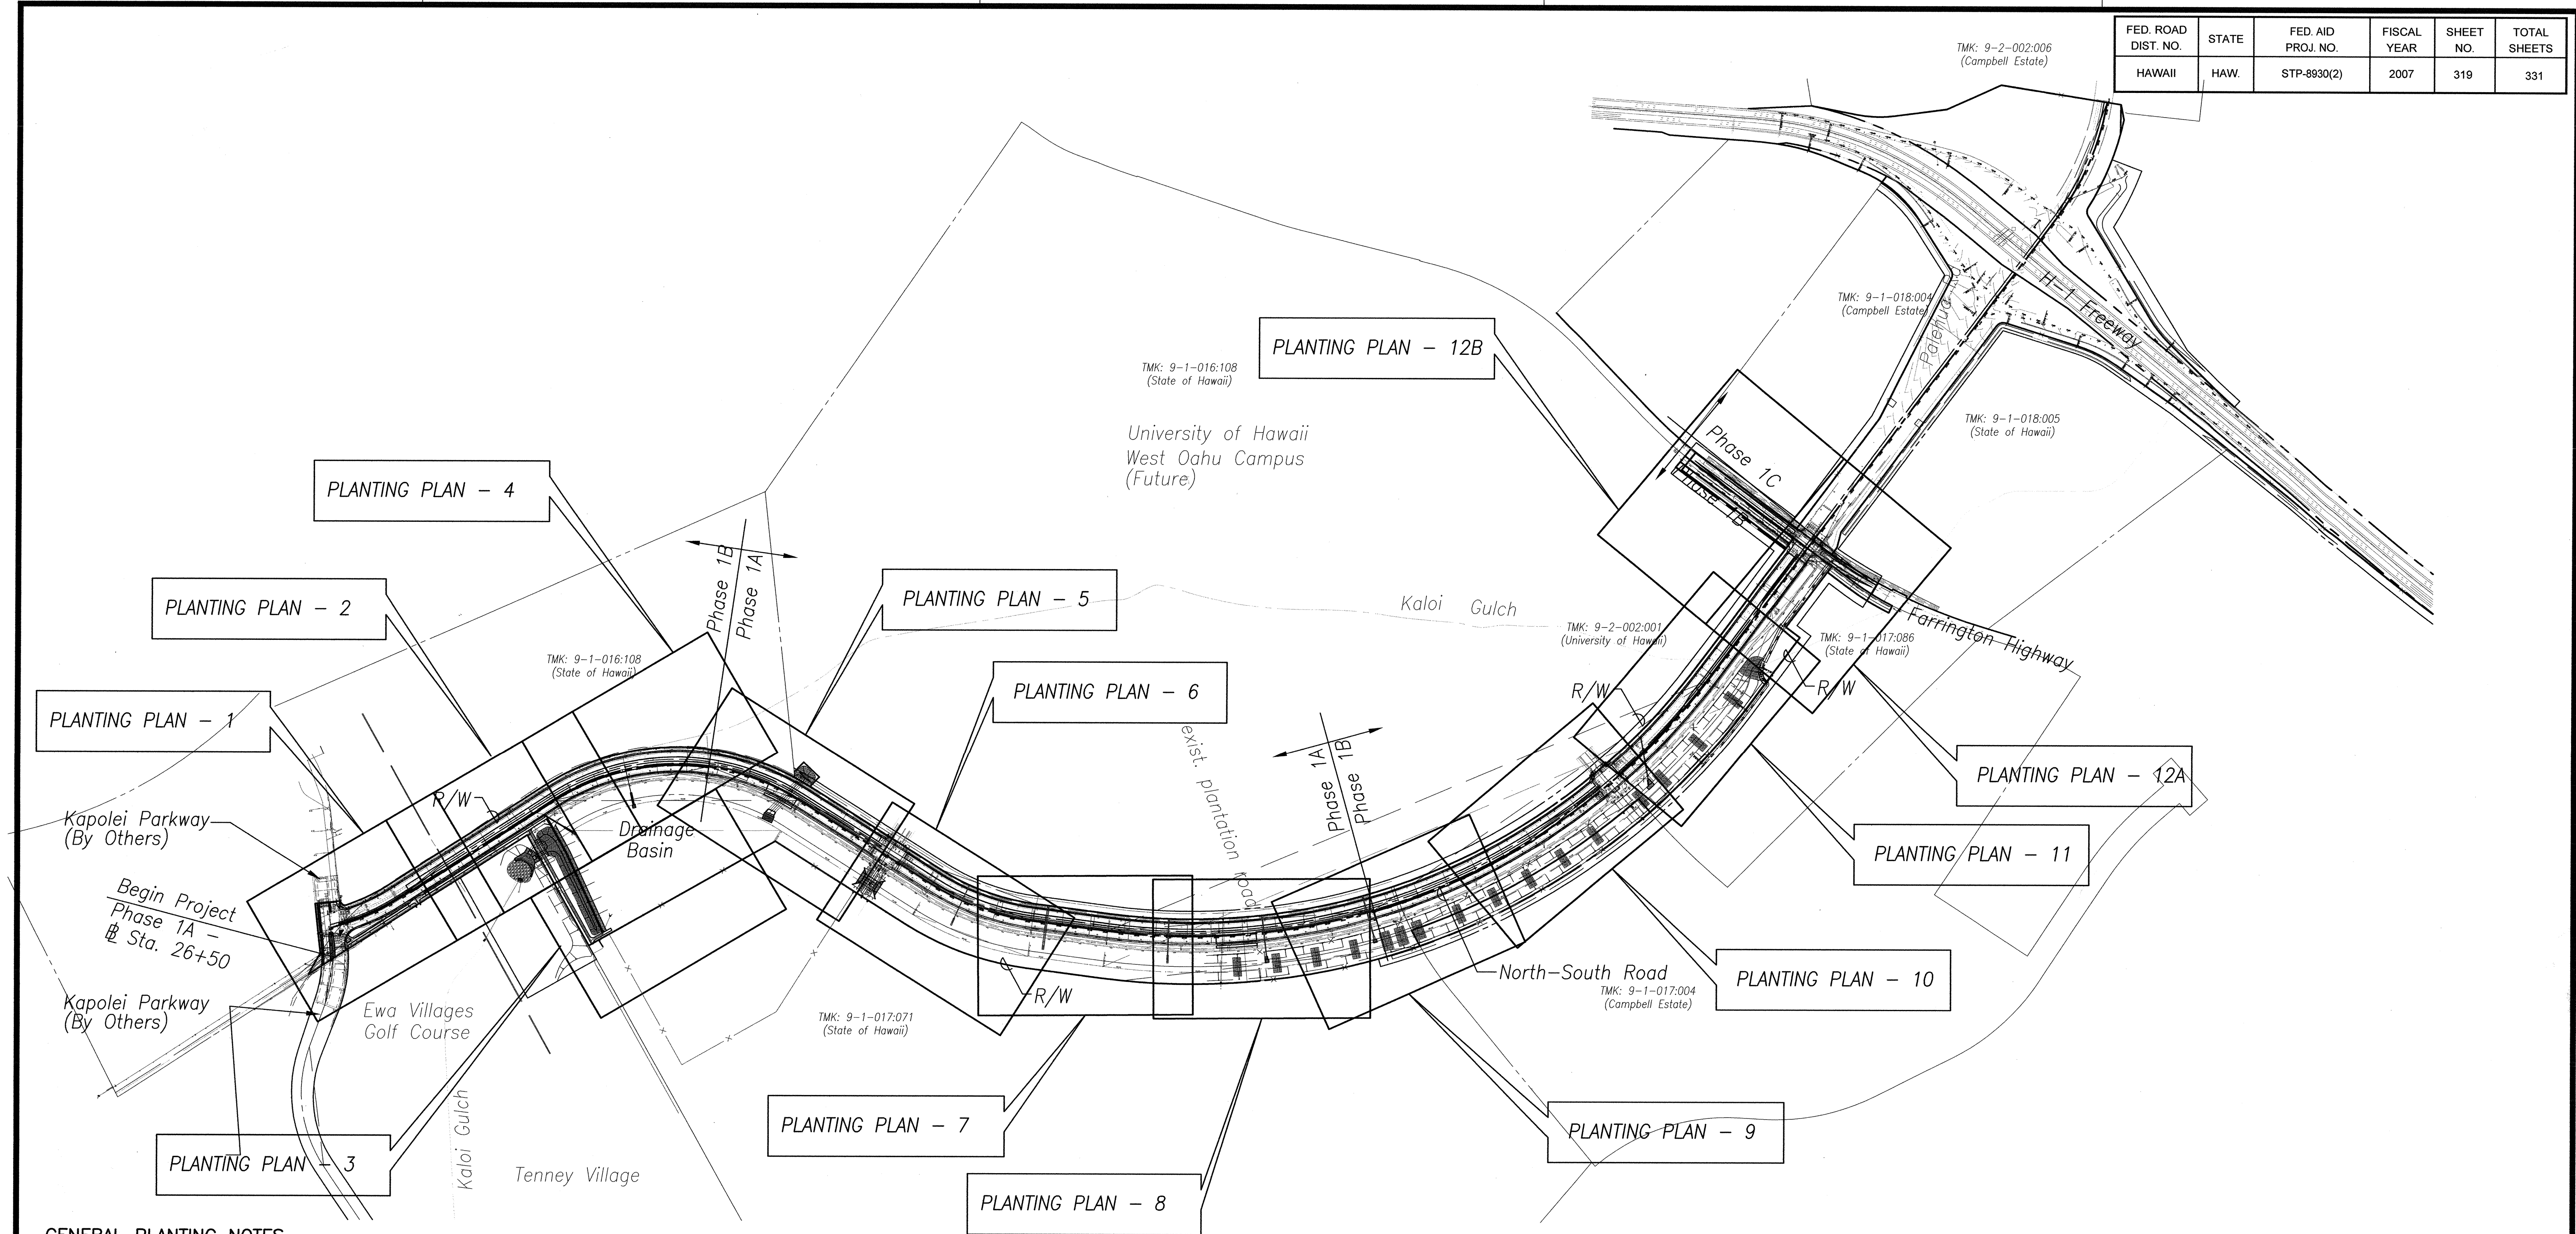

#### GENERAL PLANTING NOTES


1. All work shall be performed by persons familiar with planting work and under the supervision of a qualified planting foreman. Work in progress is to be coordinated with the Engineer as areas become available for planting.
2. The Contractor is to verify the location of all on-site utilities (including irrigation piping and wiring) before commencing the work. The Contractor shall also be responsible for the repair of any damaged utilities.
3. Plant material location shown on plans is diagrammatic and will be subject to adjustment in the field by the Engineer.
4. Quantities shown on the landscape legend are for the convenience of the Contractor. It is the responsibility of the contractor to provide and install the necessary landscape materials in quantities sufficient to fulfill the design at the spacing/depth specified and in the locations shown on the Planting Plans.
5. The Contractor shall take all reasonable precautions to coordinate work and to minimize damage to completed grading, irrigation, and related work.
6. The Contractor shall restore and/or provide grassing per specification and temporary irrigation to all construction parcels to prevent erosion at no additional cost to the State, whether or not shown on the plans.

#### PLANTING MATERIALS LEGEND

DESCRIPTION	REMARKS
2,400,000 S.F. BUFFEL GRASS 'T4464' (CENCHRUS CILIARIS)	HYDROSEED
10,000 S.F. 3" LAYER, WOOD MULCH OVER WEED BARRIER	

#### LANDSCAPE KEY PLAN

SCALE: 1"=500'

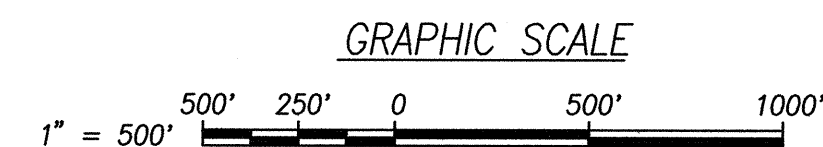

THIS WORK WAS PREPARED BY ME OR UNDER MY SUPERVISION AND CONSTRUCTION OF THIS PROJECT WILL BE UNDER MY OBSERVATION  
 Date: April 2008  
 Expiration Date of the License

STATE OF HAWAII  
 DEPARTMENT OF TRANSPORTATION  
 HIGHWAYS DIVISION

#### PLANTING KEY PLAN

North-South Road  
 Phase 1B  
 F.A.I. Proj. No. STP-8930(2)

Date: Feb 21, 2007

SHEET No. L1.1 OF 13 SHEETS